
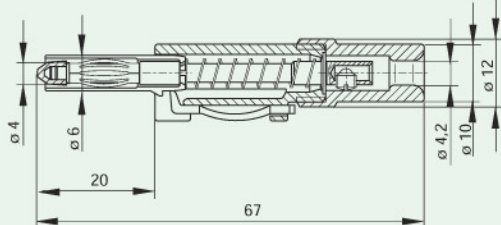


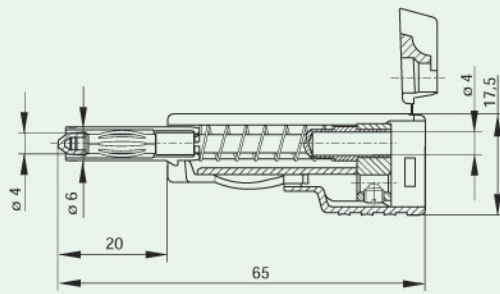

Bananenstecker berührungsgeschützt, konfektionierbar mit Schraubanschluss bis 1,5 mm², isoliert durch rastende und gefederte Isolierhülse, die nur durch Druck auf die seitliche Verriegelungsfeder freigegeben wird. Kontaktfeder, Durchmesser 4 mm.	Banana plug, touch-protected, can be assembled with cables with screw connection up to 1.5 mm² cross-section, insulated by latching and sprung insulated sleeve which is only released by pressure on the side-mounted locking spring. 4 mm diameter.	Bananenstecker berührungsgeschützt mit Weitersteckmöglichkeit, Schraubanschluss bis 2,5 mm². Isoliert durch rastende und gefederte Isolierhülse, die nur durch Druck auf die seitliche Verriegelungsfeder freigegeben wird. Kontaktfeder, Durchmesser 4 mm.	Banana plug, touch-protected, with capability of further connection, with solder connection for cross-sections up to 2.5 mm², insulated by latching and sprung insulated sleeve which is only released by pressure on the side-mounted locking spring. 4 mm diameter.
SLS 20 B	SLS 20 B	SLS 200	SLS 200
● 931 825-100 ● 931 825-101 ● 931 825-102 ● 931 825-103 ● 931 825-104 ○ 931 825-107		● 932 153-100 ● 932 153-101 ● 932 153-102 ● 932 153-103 ● 932 153-104	
			
4 mm mit Lamellenfeder	4 mm with laminated spring	4 mm mit Lamellenfeder	4 mm with laminated spring
gefederter Stift	pin (spring-loaded)	gefederter Stift, ungefederte Buchse	pin (spring-loaded), socket
schrauben	screw	schrauben	screw
DC 300 V	DC 300 V	DC 300 V	DC 300 V
16 A	16 A	30 A	30 A
5 mOhm	5 mOhm	5 mOhm	5 mOhm
Kupfer-Beryllium	copper beryllium	Kupfer-Beryllium	copper beryllium
vernickelt	nickel-plated	vernickelt	nickel-plated
POM	POM	PP	PP
-25 °C bis +80 °C	-25 °C to +80 °C	-25 °C bis +80 °C	-25 °C to +80 °C
UL 94 HB	UL 94 HB	UL 94 V-2	UL 94 V-2