



Features

- · Plastic housing with class II design
- · Built-in active PFC function
- Class 2 power unit (except NPF-90D-12/15)
- Standby power consumption < 0.5W
- IP67 rating for indoor or outdoor installations
- Function: 3 in 1 dimming (dim-to-off)
- Typical lifetime >50000hours
- 5 years warranty


Applications

- · LED panel lighting
- · LED downlight
- LED decorative lighting
- LED tunnel lighting
- · Moving sign

Description

NPF-90D series is a 90W AC/DC LED driver featuring the constant current mode output. NPF-90D operates from $90\sim305$ VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for $-40\sim+85^{\circ}$ C case temperature under free air convection. The entire series is rated with IP67 ingress protection level and is suitable to work for a variety of applications at dry, damp or wet locations. NPF-90D is equipped with the 3 in 1 dimming function so as to provide the design flexibility for LED lighting system.

■ Model Encoding

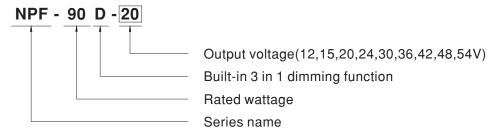




SPECIFICATION

RATED CURRENT	7.5A		1						
ATER ROWER	7.07	6A	4.5A	3.75A	3A	2.5A	2.15A	1.88A	1.67A
RATED POWER	90W	90W	90W	90W	90W	90W	90.3W	90.24W	90.18W
CONSTANT CURRENT REGION	7.2 ~ 12V 9 ~ 15V 12 ~ 20V 14.4 ~ 24V 18 ~ 30V 21.6 ~ 36V 25.2 ~ 42V 28.8 ~ 48V 32.								32.4 ~ 54
CURRENT RIPPLE	5.0% max. @rated current								
CURRENT TOLERANCE	±5.0%								
SET UP TIME Note.3	500ms/115VAC, 230VAC								
OLTAGE RANGE Note.2	90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)								
FREQUENCY RANGE	47 ~ 63Hz								
POWER FACTOR (Typ.)	PF≥0.98/115VAC, PF≥0.96/230VAC, PF≥0.94/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section) THD<20%(@load≥60%/115VC, 230VAC; @load≥75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)								
TOTAL HARMONIC DISTORTION									
EFFICIENCY(Typ.)	88%	89%	90%	90%	89%	90%	90%	90%	90%
AC CURRENT (Typ.)	0.95A / 115\	/AC 0.5	5A / 230VAC	0.4A / 27	77VAC				
NRUSH CURRENT(Typ.)	COLD START 60A(twidth=550µs measured at 50% Ipeak) at 230VAC; Per NEMA 410								
MAX. NO. of PSUs on 16A CIRCUIT BREAKER	3 units (circuit breaker of type B) / 6 units (circuit breaker of type C) at 230VAC								
EAKAGE CURRENT	<0.25mA / 277VAC								
STANDBY POWER CONSUMPTION	<0.5W								
OVER CURRENT	95 ~ 108% Constant current limiting, recovers automatically after fault condition is removed								
SHORT CIRCUIT									
SHORT GIROOTI	15 ~ 17V						46 ~ 54V	54 ~ 60V	59 ~ 66V
OVER VOLTAGE	Shut down o	/p voltage, r	e-power on to	recover	01 101	11 101	1.0 0.1	0. 001	
OVER TEMPERATURE	Shut down o	/p voltage, r	e-power on to	recover					
WORKING TEMP.	Tcase=-40 ~ +85°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)								
MAX. CASE TEMP.	Tcase=+85°C								
WORKING HUMIDITY									
STORAGE TEMP., HUMIDITY									
TEMP. COEFFICIENT	$\pm 0.03\%$ C (0 ~ 50°C)								
/IBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes								
SAFETY STANDARDS	UL8750, CSA C22.2 No. 250.13-12, ENEC BS EN/EN61347-1, BS EN/EN61347-2-13, BS EN/EN62384 independe EAC TP TC 004, GB19510.1,GB19510.14, IP67 approved ;Design refer to BS EN/EN60335-1								
WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC								
SOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH								
EMC EMISSION	Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@ load ≥ 60%) ; BS EN/EN61000-3-3;GB17743 ar GB17625.1,EAC TP TC 020								
EMC IMMUNITY	2KV);EAC TP TC 020								
MTBF									
DIMENSION	171*63*37.5mm (L*W*H)								
PACKING	0.77Kg; 18p	cs/14.9Kg/0	.82CUFT						
 De-rating may be needed ur Length of set up time is mea The standby power consum The driver is considered as complete installation, the fin This series meets the typica Please refer to the warranty The ambient temperature de 	nder low input asured at first of ption is specifical a component that all equipment in all life expectan statement on erating of 3.5°C	voltages. Pleacold start. Turned for 230VAM hat will be open nanufacturers by of >50,000 MEAN WELL	ase refer to "S ning ON/OFF on the combination of t	TATIC CHARA the driver may bination with fir fy EMC Directi ation when To: ttp://www.mea s and of 5°C/1"	ACTERISTIC" lead to increa nal equipment ve on the com ase, particular nwell.com 000m with fan	sections for de ise of the set u . Since EMC p inplete installati ly to point (or models for op	etails. Ip time. Ierformance widen again. TMP, per DLC Ierating altitude	C), is about 75	°C or less.
	REQUENCY RANGE OWER FACTOR (Typ.) OTAL HARMONIC DISTORTION FFICIENCY(Typ.) C CURRENT (Typ.) IRUSH CURRENT(Typ.) IAX. NO. of PSUs on 16A IRCUIT BREAKER EAKAGE CURRENT TANDBY POWER CONSUMPTION VER CURRENT HORT CIRCUIT VER VOLTAGE VER TEMPERATURE /ORKING TEMP. IAX. CASE TEMP. /ORKING HUMIDITY TORAGE TEMP., HUMIDITY EMP. COEFFICIENT IBRATION AFETY STANDARDS //ITHSTAND VOLTAGE SOLATION RESISTANCE MC EMISSION MC IMMUNITY ITBF IMENSION ACKING . All parameters NOT special . De-rating may be needed ur . Length of set up time is mea . The standby power consum . The driver is considered as complete installation, the fin . This series meets the typica . Please refer to the warranty . The ambient temperature de . For any application note and	OLTAGE RANGE Note.2 REQUENCY RANGE OWER FACTOR (Typ.) PF≥0.98/1* (Please refe OTAL HARMONIC DISTORTION FFICIENCY(Typ.) C CURRENT (Typ.) RUSH CURRENT(Typ.) IAX. NO. of PSUs on 16A IRCUIT BREAKER EAKAGE CURRENT TANDBY POWER CONSUMPTION VER CURRENT HORT CIRCUIT Hiccup mod 15 ~ 17V Shut down of VER TEMPERATURE FORKING TEMP. TORAGE TEMP. TORAGE TEMP. TORAGE TEMP. TORAGE TEMP, HUMIDITY TORAGE TEMP TORAGE TEMP TORAGE TEMP TORAGE TEMP TORAGE TORAGE TORAGE THD <td>OLTAGE RANGE Note.2 REQUENCY RANGE 47 ~ 63Hz OWER FACTOR (Typ.) OTAL HARMONIC DISTORTION THD < 20% (@load≥60% (Please refer to "POWER Please refer to "POWER Please refer to "TOTAL PRICE Please refer to "TOTAL Please refer to "POWER Please refer to "TOTAL Please refer to "POWER Please refer to "POWER Please refer to "POWER Please refer to Total Please refer to</td> <td>OUTAGE RANGE Note.2 (Please refer to "STATIC CHARACTE REQUENCY RANGE 47 ~ 63Hz OWER FACTOR (Typ.) DTAL HARMONIC DISTORTION PF≥ 0.98/115VAC, PF≥ 0.96/230VAC (Please refer to "TOTAL HARMONIC (Plea</td> <td>OLTAGE RANGE Note.2 REQUENCY RANGE OWER FACTOR (Typ.) OWER FACTOR (Typ.) DTAL HARMONIC DISTORTION THD< 20% (@load≥60%/115VC, 230VAC; @load (Please refer to "POWER FACTOR (PF) CHARACT THD< 20% (@load≥60%/115VC, 230VAC; @load (Please refer to "TOTAL HARMONIC DISTORTION THD< 20% (@load≥60%/115VC, 230VAC; @load (Please refer to "TOTAL HARMONIC DISTORTIC (Please refer to "DISTORTIC DISTORTIC (Please refer to "DISTORTIC DISTORTIC DISTORT DISTORTIC DISTORT DISTORTIC DISTORTIC DISTORTIC DISTORTIC DISTORTIC DISTORTIC DIST</td> <td>OLTAGE RANGE Note.2 REQUENCY RANGE 47 ~ 63Hz OWER FACTOR (Typ.) PF≥0.98/115VAC, PF≥0.96/230VAC, PF≥0.94/277VAC@full (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" see DTAL HARMONIC DISTORTION THD ~ 20% (@)load≥60%/115VC, QF) CHARACTERISTIC" see DTAL HARMONIC DISTORTION THD ~ 20% (@)load≥60%/115VC, QF) CHARACTERISTIC" see THD ~ 20% (G) CHARACTERISTIC" see THD ~ 20% (G) CHARACTERISTIC" see THO ~ 20% (G) CHARACTERISTIC CHARACTERISTIC</td> <td> OLTAGE RANGE Note Please refer to "STATIC CHARACTERISTIC" section </td> <td>OLTAGE RANGE Vaes2 (Please refer to "STATIC CHARACTERISTIC" section) REQUENCY RANGE 47 - 63Hz OWER FACTOR (Typ.) (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section) THD < 20% (@load ≥ 60% / 115 VC, 20 VAC, (@load ≥ 75% / 277 VAC) (Please refer to "TOTAL HARMONIC DISTORTION, THD)" section) THD < 20% (@load ≥ 60% / 115 VC, 20 VAC, (@load ≥ 75% / 277 VAC) (Please refer to "TOTAL HARMONIC DISTORTION, THD)" section) FFICIENCY(Typ.) 88% 89% 90% 90% 89% 90% 90% 90% 90% C CURRENT (Typ.) AX. NO. of PSUs on 16A (RCUIT BREAKER) EAKAGE CURRENT AX. NO. of PSUs on 16A (RCUIT BREAKER) EAKAGE CURRENT - 0.55W VER CURRENT - 0.55W VER CURRENT - 0.55W VER CURRENT - 0.55W VER CURRENT - 0.55W - 0.55W VER CURRENT - 0.55W - 0.55W VER CURRENT - 15 - 17V 17.5 - 21V 23 - 27V 28 - 234V 34 - 40V 41 - 46V 46 ~ 54V 45 - 46V 45</td> <td> </td>	OLTAGE RANGE Note.2 REQUENCY RANGE 47 ~ 63Hz OWER FACTOR (Typ.) OTAL HARMONIC DISTORTION THD < 20% (@load≥60% (Please refer to "POWER Please refer to "POWER Please refer to "TOTAL PRICE Please refer to "TOTAL Please refer to "POWER Please refer to "TOTAL Please refer to "POWER Please refer to "POWER Please refer to "POWER Please refer to Total Please refer to	OUTAGE RANGE Note.2 (Please refer to "STATIC CHARACTE REQUENCY RANGE 47 ~ 63Hz OWER FACTOR (Typ.) DTAL HARMONIC DISTORTION PF≥ 0.98/115VAC, PF≥ 0.96/230VAC (Please refer to "TOTAL HARMONIC (Plea	OLTAGE RANGE Note.2 REQUENCY RANGE OWER FACTOR (Typ.) OWER FACTOR (Typ.) DTAL HARMONIC DISTORTION THD< 20% (@load≥60%/115VC, 230VAC; @load (Please refer to "POWER FACTOR (PF) CHARACT THD< 20% (@load≥60%/115VC, 230VAC; @load (Please refer to "TOTAL HARMONIC DISTORTION THD< 20% (@load≥60%/115VC, 230VAC; @load (Please refer to "TOTAL HARMONIC DISTORTIC (Please refer to "DISTORTIC DISTORTIC (Please refer to "DISTORTIC DISTORTIC DISTORT DISTORTIC DISTORT DISTORTIC DISTORTIC DISTORTIC DISTORTIC DISTORTIC DISTORTIC DIST	OLTAGE RANGE Note.2 REQUENCY RANGE 47 ~ 63Hz OWER FACTOR (Typ.) PF≥0.98/115VAC, PF≥0.96/230VAC, PF≥0.94/277VAC@full (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" see DTAL HARMONIC DISTORTION THD ~ 20% (@)load≥60%/115VC, QF) CHARACTERISTIC" see DTAL HARMONIC DISTORTION THD ~ 20% (@)load≥60%/115VC, QF) CHARACTERISTIC" see THD ~ 20% (G) CHARACTERISTIC" see THD ~ 20% (G) CHARACTERISTIC" see THO ~ 20% (G) CHARACTERISTIC	OLTAGE RANGE Note Please refer to "STATIC CHARACTERISTIC" section	OLTAGE RANGE Vaes2 (Please refer to "STATIC CHARACTERISTIC" section) REQUENCY RANGE 47 - 63Hz OWER FACTOR (Typ.) (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section) THD < 20% (@load ≥ 60% / 115 VC, 20 VAC, (@load ≥ 75% / 277 VAC) (Please refer to "TOTAL HARMONIC DISTORTION, THD)" section) THD < 20% (@load ≥ 60% / 115 VC, 20 VAC, (@load ≥ 75% / 277 VAC) (Please refer to "TOTAL HARMONIC DISTORTION, THD)" section) FFICIENCY(Typ.) 88% 89% 90% 90% 89% 90% 90% 90% 90% C CURRENT (Typ.) AX. NO. of PSUs on 16A (RCUIT BREAKER) EAKAGE CURRENT AX. NO. of PSUs on 16A (RCUIT BREAKER) EAKAGE CURRENT - 0.55W VER CURRENT - 0.55W VER CURRENT - 0.55W VER CURRENT - 0.55W VER CURRENT - 0.55W - 0.55W VER CURRENT - 0.55W - 0.55W VER CURRENT - 15 - 17V 17.5 - 21V 23 - 27V 28 - 234V 34 - 40V 41 - 46V 46 ~ 54V 45 - 46V 45	

 χ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx




PFC fosc: 50~120KHz PWM fosc: 60~130KHz

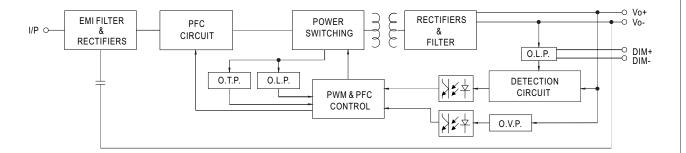

■ DRIVING METHODS OF LED MODULE

💥 This series works in constant current mode to directly drive the LEDs.

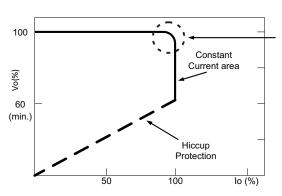


Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




■ DIMMING OPERATION




imes 3 in 1 dimming function

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
 0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: $100\mu A$ (typ.)
- O Applying additive 0 ~ 10VDC

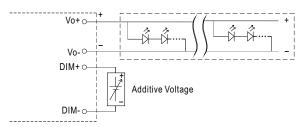


"DO NOT connect "DIM- to Vo-"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

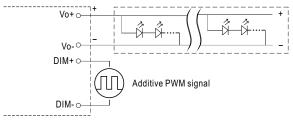



"DO NOT connect "DIM- to Vo-"


Applying additive resistance:

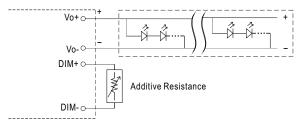

"DO NOT connect "DIM- to Vo-"








Note: 1. Min. dimming level is about 6% and the output current is not defined when 0% < Iout < 6%.


2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.



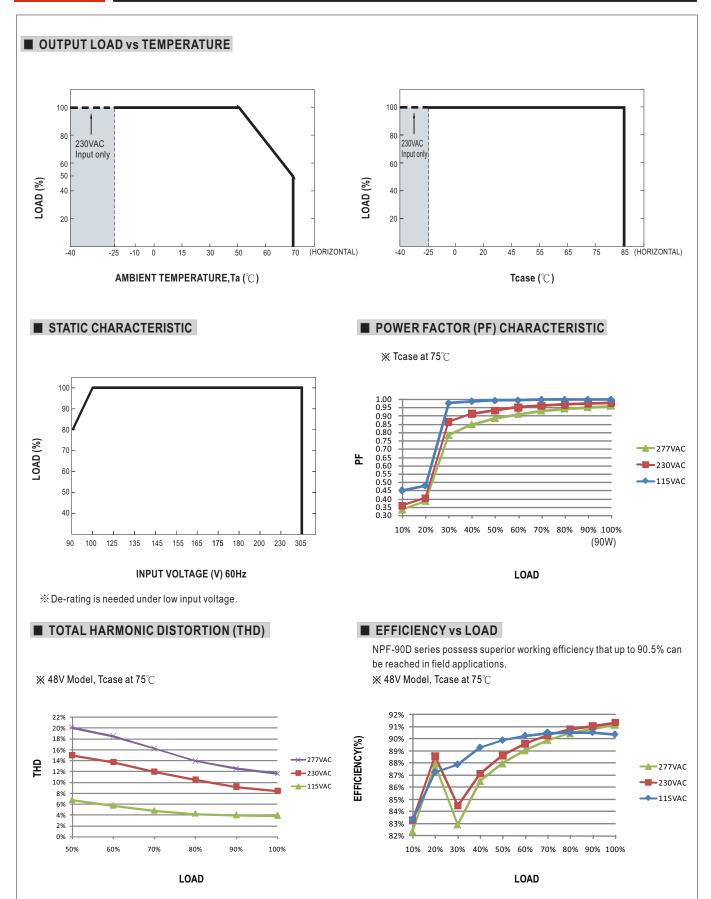



■ LIFE TIME

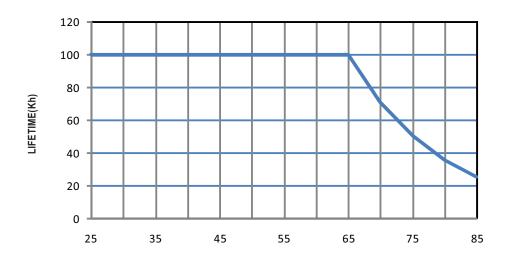


Tcase ($^{\circ}\!\mathbb{C}$)



■ MECHANICAL SPECIFICATION

Case No. PWM-90P

Unit:mm

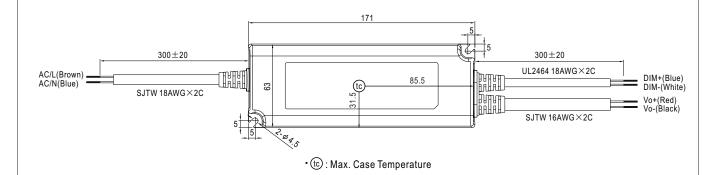



■ Recommend Mounting Direction



■ INSTALLATION MANUAL

Please refer to: http://www.meanwell.com/manual.html