


XLC-60-KN-S Series  
(Independent type)

XLC-60-KN Series  
(Built-in type)

User's Manual



## Features

- Constant power mode output with multiple stage selectable by ETS database
- Plastic housing with class II and PFC design
- Flicker free, complying with CE ErP directive
- Standby power consumption <0.5W
- Meet emergency lighting (EL) application
- KNX/EIB protocol, support KNX data secure
- Minimum dimming level 0.5%
- Functions: operation hours. power consumption feedback log/linear curve selection. . . etc
- 5 years warranty

## Applications

- Recessed Light
- Down Light
- Panel Light
- Commercial Lighting
- Decorative Lighting
- KNX digital Lighting

## GTIN CODE


MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

## Description

XLC-60-KN Series is a 60W with constant power output LED driver . It can operate from 100 ~ 305VAC and output current ranging between 900mA to 1700mA selectable by ETS database and integration KNX interface to avoid using the complicated KNX-DALI gateway. Thanks to high efficiency up to 90%, it is able to operate for -25℃ ~90℃ case temperature under free air convection. XLC-60-KN is designed based on latest safety regulations , so it provides more flexibility for LED Lighting application.

## Model Encoding

XLC - 60 - H - KN

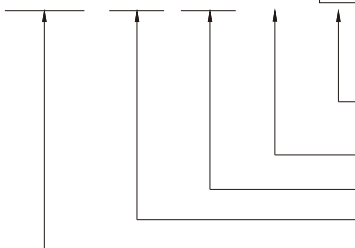

- Casing type: { Blank: without strain-relief (Built-in type)  
S: with strain-relief (Independent type)
- Function options (Built-in KNX interface)
- Rated output voltage (H-type)
- Rated wattage
- Series name


Type	Function	Note
KN	Built-in KNX interface, with standby power consumption <0.5W	In stock

## SPECIFICATION

MODEL		XLC-60-H-KN □		
OUTPUT	OPEN CIRCUIT VOLTAGE <small>Note2</small>	60V		
	DEFAULT CURRENT	900mA		
	CURRENT ADJ. RANGE (BY ETS Database)	0.9~1.7A		
	CONSTANT CURRENT REGION	9~54V		
	RATED POWER <small>Note.4</small>	60W		
	CURRENT RIPPLE <small>Note5</small>	<4%		
	CURRENT TOLERANCE	±5%		
	DIMMING RANGE	0~100%		
	SETUP,RISE TIME <small>Note.6</small>	800ms,100ms/230VAC ,1000ms,100ms/115VAC		
INPUT	VOLTAGE RANGE	100 ~ 305VAC 141 ~400VDC		
	FREQUENCY RANGE	47 ~ 63Hz		
	POWER FACTOR	PF≥0.95/115VAC, PF≥0.95/230VAC, PF≥0.9/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)		
	TOTAL HARMONIC DISTORTION	THD< 20%(@load ≥60%/230VAC; @load ≥75%/277VAC); THD<10%@load 100%/230VAC (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)		
	EFFICIENCY(Typ.) <small>Note7</small>	90%		
	AC CURRENT	0.75A/115VAC, 0.35A/230VAC, 0.3A/277VAC		
	INRUSH CURRENT	COLD START 15A(twidth=310μs measured at 50% Ipeak) at 230VAC; Per NEMA 410		
	MAX. NO. of PSUs on 16A CIRCUIT BREAKER	25 units (circuit breaker of type B) / 36 units (circuit breaker of type C) at 230VAC		
	LEAKAGE CURRENT	<0.75mA / 277VAC		
		STANDBY POWER CONSUMPTION <small>Note8</small>	Standby power consumption<0.5W (Dimming off)	
PROTECTION	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed		
	OVER TEMPERATURE	Stage 1: De-rating to 75% loading; Stage 2: De-rating to 50% loading. Recovers automatically after fault condition is removed.		
FUNCTION	DIMMING	Please refer to 'DIMMING OPERATION' section		
ENVIRONMENT	WORKING TEMP.	Tcase=-25~90℃ (Please refer to " OUTPUT LOAD vs TEMPERATURE" section)		
	MAX. CASE TEMP.	Tcase=90℃		
	WORKING HUMIDITY	20 ~ 90% RH non-condensing		
	STORAGE TEMP., HUMIDITY	-40 ~ +80℃, 10 ~ 95% RH		
	TEMP. COEFFICIENT	±0.03%/℃ (0 ~ 50℃)		
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes		
SAFETY&EMC	SAFETY STANDARDS	ENEC BS EN/EN61347-1, BS EN/EN61347-2-13(EL) appendix J suitable for emergency installations (DC input 176-280VDC); BS EN/EN62384 , GB/T19510.1, GB/T19510.213, EAC TP TC 004 approved; Design refer to AS/NZS 61347-1, AS/NZS 61347-2-13		
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC		
	ISOLATION RESISTANCE	I/P-O/P:>100M Ohms / 500VDC / 25℃/ 70% RH		
	EMC EMISSION	Parameter	Standard	Test Level/Note
		Conducted	BS EN/EN55015(CISPR15) ,GB/T 17743	-----
		Radiated	BS EN/EN55015(CISPR15) ,GB/T 17743	-----
		Harmonic Current	BS EN/EN61000-3-2 , GB17625.1	Class C @load≥60%
	EMC IMMUNITY	Voltage Flicker	BS EN/EN61000-3-3	-----
		BS EN/EN61547		
		Parameter	Standard	Test Level/Note
ESD		BS EN/EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV contact	
Radiated		BS EN/EN61000-4-3	Level 2	
EFT/Burst		BS EN/EN61000-4-4	Level 2	
Surge		BS EN/EN61000-4-5	Level 3, 1KV/Line-Line	
Conducted		BS EN/EN61000-4-6	Level 2	
Magnetic Field		BS EN/EN61000-4-8	Level 2	
Voltage Dips and Interruptions		BS EN/EN61000-4-11	70% residual voltage for 10 period, 0% residual voltage for 0.5 periods	
OTHERS	KNX	Certified protocol		
	FLICKER <small>Note.9</small>	PstLM ≤ 1, SVM ≤ 0.4		
	MTBF	4130.5K hrs min. Telcordia SR-332 (Bellcore) 317.7Khrs min. MIL-HDBK-217F (25℃)		
	DIMENSION	176*45*32mm , 136*45*32mm (L*W*H)		
	PACKING	0.28Kg; 40pcs/12.1Kg/0.48CUFT(for blank type); 0.31Kg; 40pcs/13.1Kg/0.61CUFT(for S-type)		
NOTE		<p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25℃ of ambient temperature.</p> <p>2. Output hiccups under no-load condition.</p> <p>3. Please refer to "DRIVER METHODS OF LED MODULE".</p> <p>4. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.</p> <p>5. Current ripple is measured 50%~100% of maximum voltage under rated power delivery.</p> <p>6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.</p> <p>7. Efficiency is measured at 1050mA/54V output set by ETS database.</p> <p>8. Standby power consumption is measured at 230VAC.</p> <p>9. Flicker is measured at full load with the light source provided by MEAN WELL.</p> <p>10. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. (as available on <a href="https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf">https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf</a>)</p> <p>11. For XLC-S series: RCM is on a voluntary basis. Non IC classification Independent LED control gear is not suitable for residential installations. For XLC(except -S) series: RCM is on a voluntary basis and meets relevant IEC or AS/NZS standards complying with AS/NZS 4417.1.</p> <p>12. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft).</p> <p>13. This series meets the typical life expectancy of 50000 hours of operation when Tcase, particularly tc point (or TMP, per DLC), is about 75℃ or less.</p> <p>14. For more information, please contact with MEAN WELL sales.</p> <p>※ Product Liability Disclaimer: For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.asp">https://www.meanwell.com/serviceDisclaimer.asp</a></p>		

## ■ BLOCK DIAGRAM

Fosc : 90KHz

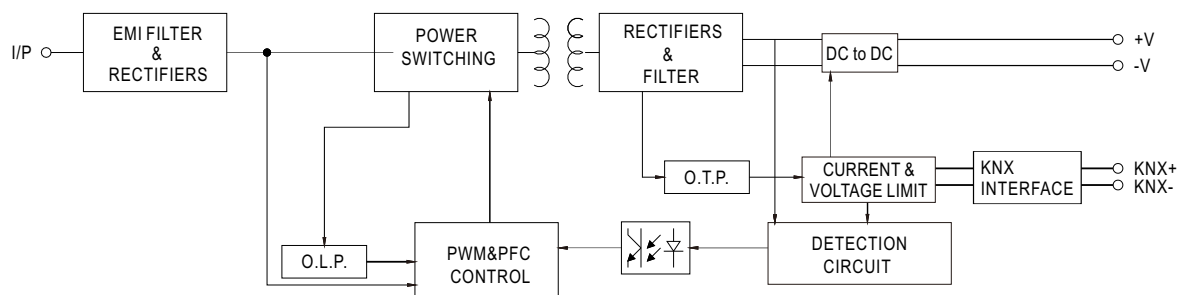


## ■ DRIVING METHODS OF LED MODULE

※ I-V Operating Area

◎ XLC-60-H-KN

For 60W application

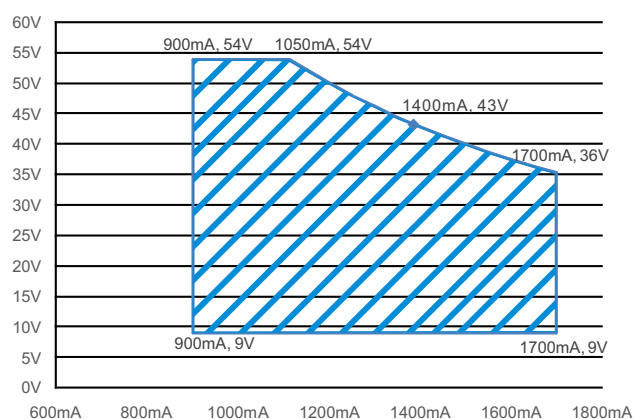

## ■ CONSTANT POWER TABLE

XLC-60-KN is a multiple-stage constant power driver, selection of output current through Database.

Vo	Io	Vo	Io
9~54V	900mA(Default)	9~45V	1350mA
9~54V	950mA	9~43V	1400mA
9~54V	1000mA	9~41V	1450mA
9~54V	1050mA	9~40V	1500mA
9~54V	1100mA	9~39V	1550mA
9~52V	1150mA	9~38V	1600mA
9~50V	1200mA	9~37V	1650mA
9~48V	1250mA	9~36V	1700mA
9~46V	1300mA		


## ■ DIMMING OPERATION

### ※ KNX interface

- Apply KNX Bus cable between KNX+ and KNX-
- The application program(database) can be downloaded via Online Catalogs from ETS or via <http://www.meanwell.com/productCatalog.aspx>


Parametrization options	Description
Device Setting	<ul style="list-style-type: none"> <li>•Select current level</li> <li>•Select model</li> <li>•Behavior bus power up</li> </ul>
Parameter Setting	<ul style="list-style-type: none"> <li>•Basic Setting <ul style="list-style-type: none"> <li>•normal Dimmer, staircase light</li> <li>•switch function</li> <li>•relative dimming function</li> <li>•absolution dimming function</li> </ul> </li> <li>•Feedback Setting <ul style="list-style-type: none"> <li>•dimming value report</li> <li>•on/off state report</li> <li>•lamp failure report</li> </ul> </li> <li>•Lock function</li> </ul>
Scenes	<ul style="list-style-type: none"> <li>•Learn scene</li> <li>•scene1~scene32</li> </ul>
Automatic function	<ul style="list-style-type: none"> <li>•Automatic function1~4</li> </ul>
operating hours	<ul style="list-style-type: none"> <li>•Counting of operating hours</li> <li>•Constant light output(CLO)</li> <li>•Life time pre-warning</li> </ul>
Power consumption	<ul style="list-style-type: none"> <li>•Voltage, current, power feedback</li> <li>•Energy consumption feedback</li> </ul>
Temperature Measurement	<ul style="list-style-type: none"> <li>•customize the alarm temperature</li> <li>•Send temperature report cyclically</li> </ul>
Auto-dimming over time	<ul style="list-style-type: none"> <li>•Optional gradient dimming</li> </ul>
Correction characteristic	<ul style="list-style-type: none"> <li>•Correction by lux measured value(lux)</li> </ul>
Push Dim Port	<ul style="list-style-type: none"> <li>•Push dim</li> <li>•AC monitor</li> </ul>

### ※ CONSTANT LIGHT OUTPUT

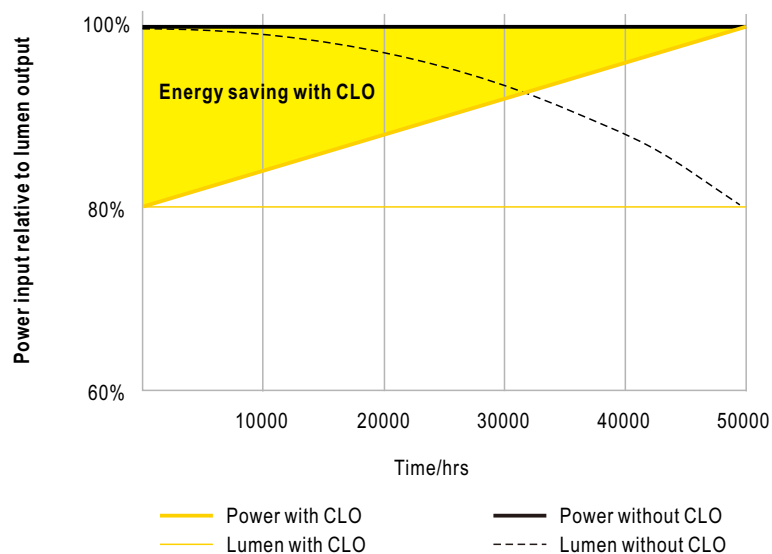


### ※ PUSH dimming or AC/DC input monitor(Primary side)

#### ◎ PUSH dimming

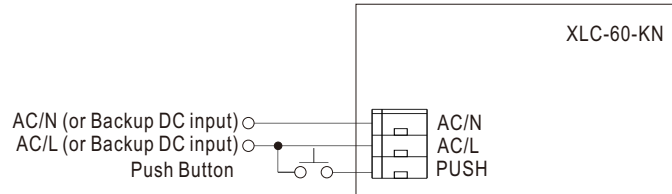



- KNX bus need to be connected when using PUSH Dimming
- The detailed function of PUSH dimming, please refer to the database.
- The maximum length of the cable between the push button and driver is 20 meters.
- The mechanical push button can be connected only between the PUSH terminal, as displayed in the diagram, and AC/L (in brown or black); It will not function properly if it is connected to AC/N.
- In case the PUSH dimming is set locally, up to 10 drivers can perform the PUSH dimming at the same time when utilizing one common push button.
- In case the PUSH dimming is set independently via ETS, the number of drivers is done through group address and determined by the ETS project designer.

#### ◎ AC/DC input monitor

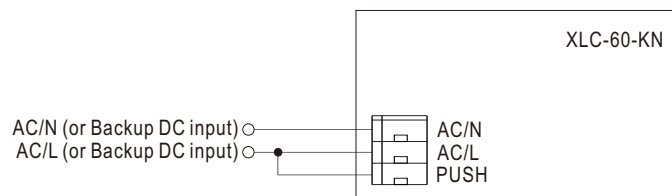


- KNX bus need to be connected when using AC/DC input monitor
- The detailed function of AC/DC input monitor(emergency lighting), please refer to the database and instruction manual.

### ■ OUTPUT LOAD vs TEMPERATURE

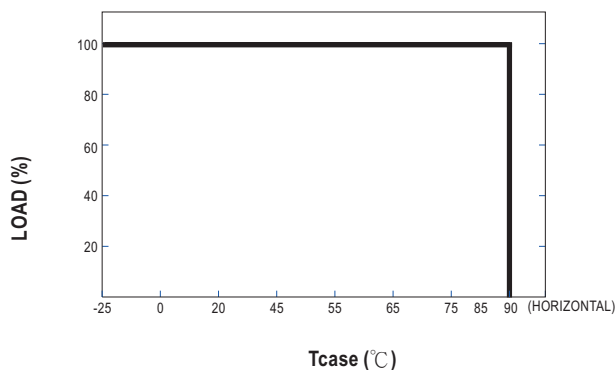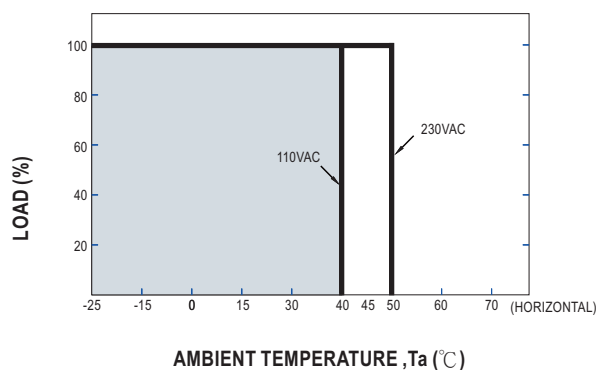


### ■ STATIC CHARACTERISTIC

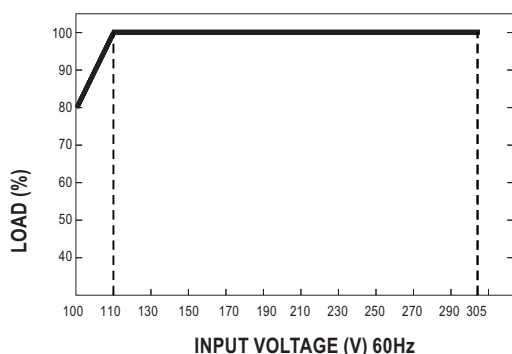



※ De-rating is needed under low input voltage.

### ■ LIFE TIME

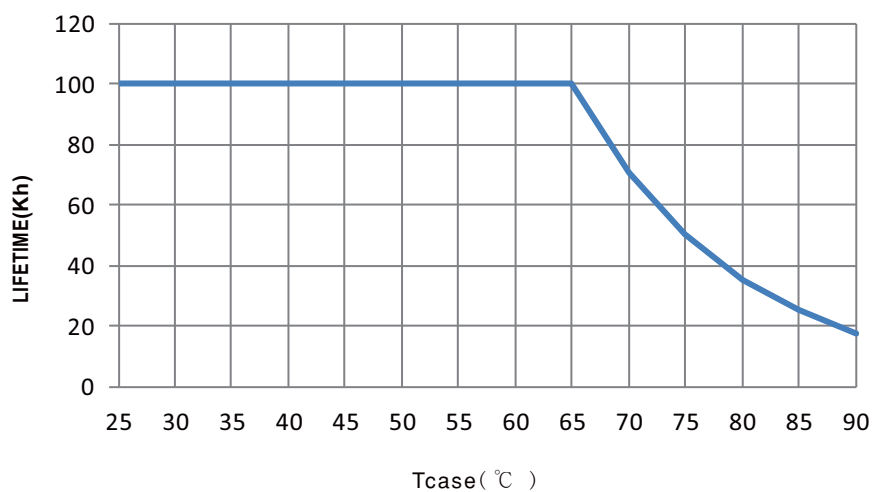



### TOTAL HARMONIC DISTORTION (THD)

※ XLC-60-H-KN Model, Tcase at 75°C

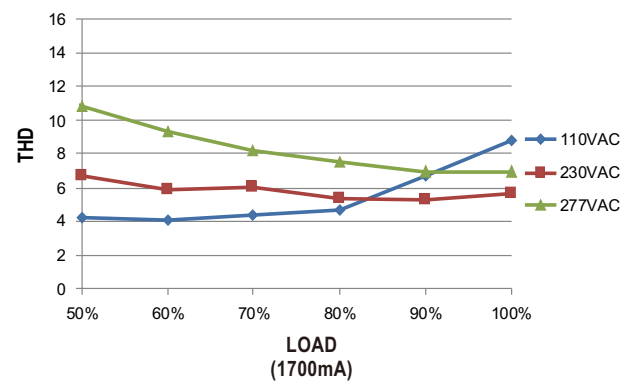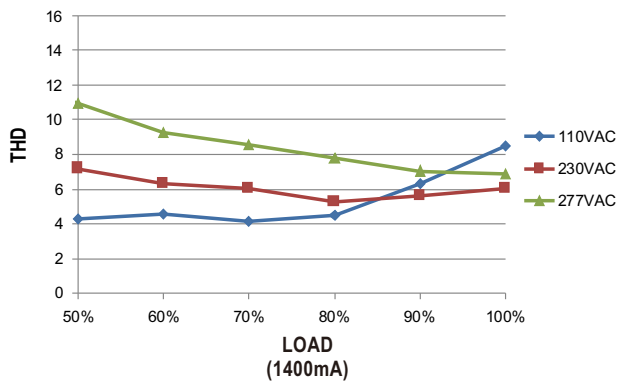

### POWER FACTOR (PF) CHARACTERISTIC



※ XLC-60-H-KN Model, Tcase at 75°C

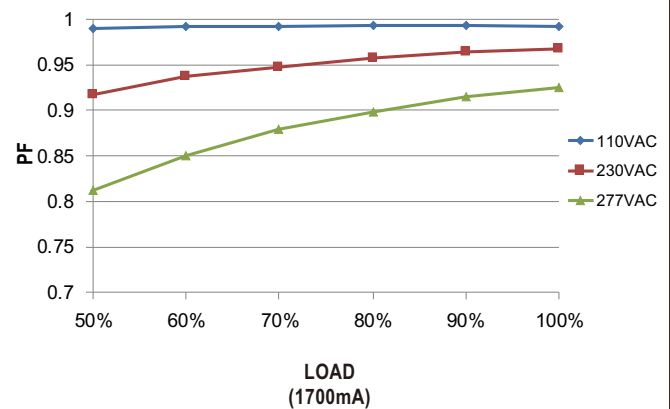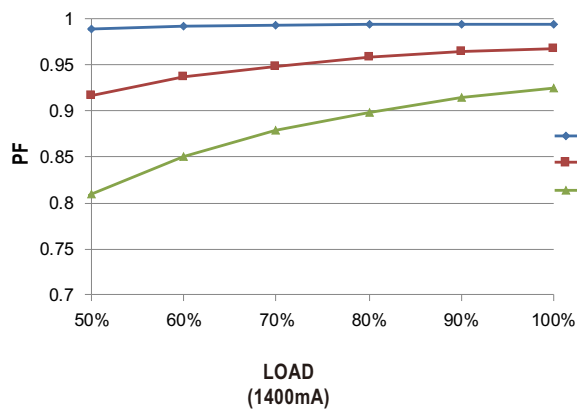

### EFFICIENCY vs LOAD

XLC-60-KN series possess superior working efficiency that up to 90% can be reached in field applications.

※ XLC-60-H-KN Model, Tcase at 75°C

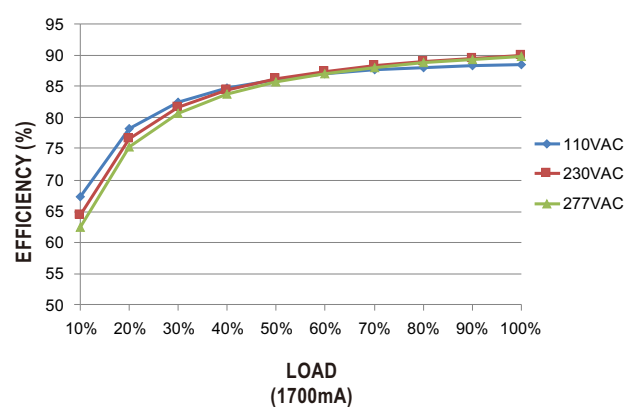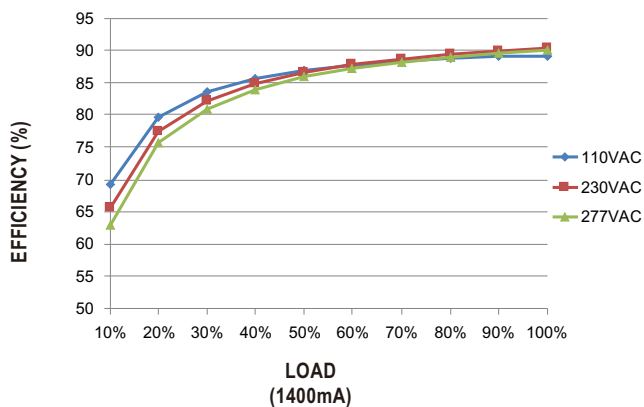

## MECHANICAL SPECIFICATION

Case No.XLC-60


Unit:mm

Tolerance:  $\pm 1$

※ XLC-60-KN Built-in Type

※ Terminal Pin  
No. Assignment( TB1)

Pin No.	Assignment
1	AC/N
2	AC/L
3	PUSH

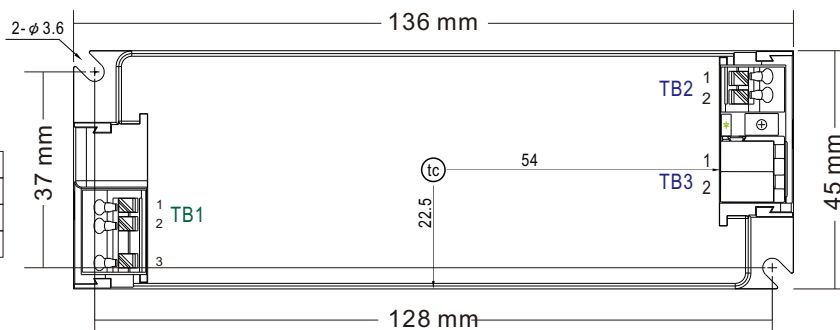



※ Terminal Pin  
No. Assignment(TB2)

Pin No.	Assignment
1	+V
2	-V


※ Terminal Pin  
No. Assignment(TB3)

Pin No.	Assignment
1	KNX+
2	KNX-

**TB1 wiring:**

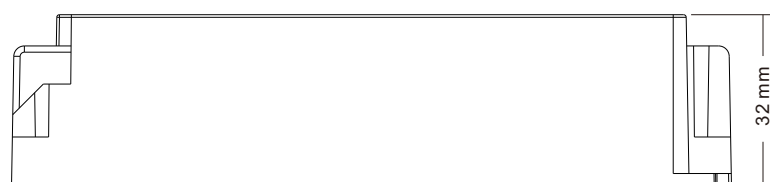

**TB2 wiring:**




Item	Order No.	Quantity(MOQ/1Bag)
Strain-relief cap	1**3XLC-SET	50pcs (2pcs 1 set)

※ XLC-60-KNS Independent Type

Case No.XLC-60-S

Unit:mm

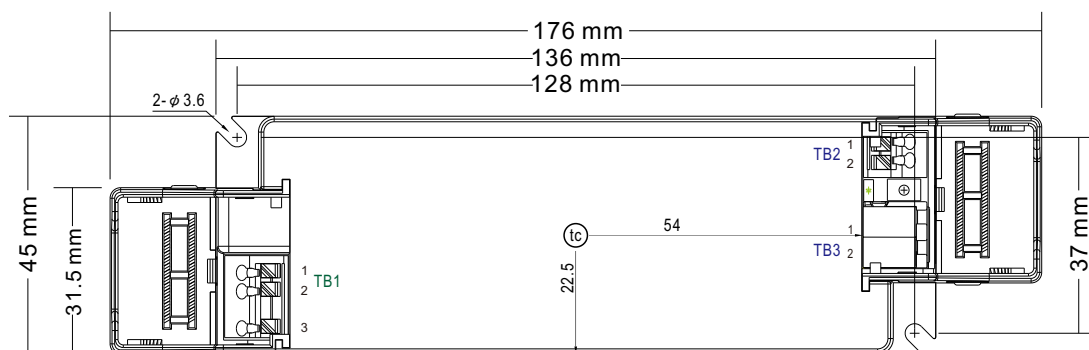

※ Terminal Pin No. Assignment( TB1)

Pin No.	Assignment
1	AC/N
2	AC/L
3	PUSH



✖ Terminal Pin No. Assignment(TB2)

Pin No.	Assignment
1	+V
2	-V


※ Terminal Pin No. Assignment(TB3)

Pin No.	Assignment
1	KNX+
2	KNX-

**TB1 wiring:**

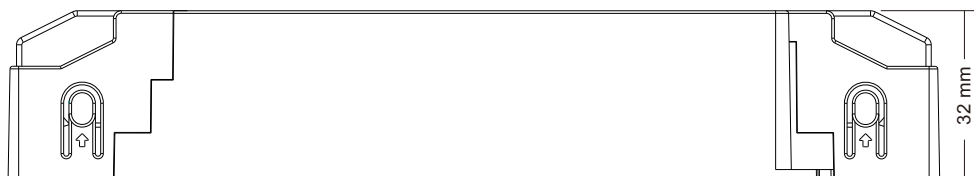

**TB2 wiring:**



## ■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>