



HITPOINT

TEL:8862-26013311

FAX:8862-26013898

NO.4 Lane 505, Zhongzheng Rd., Linkou Shiang, Taipei, Taiwan 24445

Piezo Siren PS-953IC-AQ

(ROHS)

DATE:2021.02.04


1. Electrical Characteristics

VER.:1

Resonant Frequency (KHz)	1.5 ~ 3.5
Operating Voltage (Vdc)	5 ~ 15
Rated Voltage (Vdc)	12
Current Consumption (mA/max.)	150 at Rated Voltage
Sound Pressure Level (dB)	105±5 at 100 cm at Rated Voltage
Tone/Pulse Rate (Hz)	Sweep 10 ±20%
Operating Temperature (°C)	-20 ~ +60
Storage Temperature (°C)	-30 ~ +80

2. Dimensions and Material

2-1 Shape

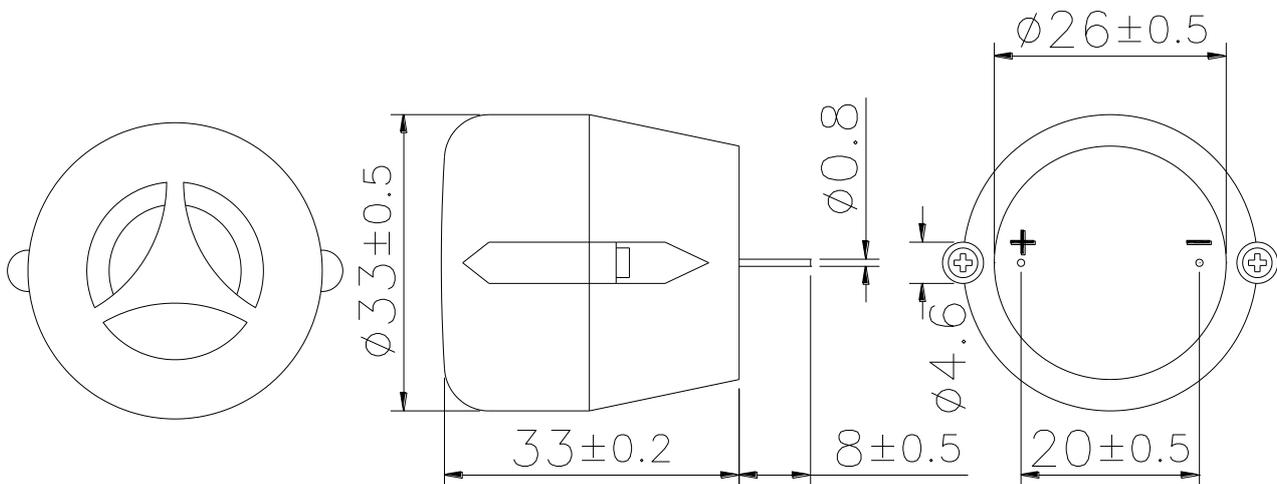

Unit : mm



2-2 Material

Housing	ABS 777D plastic resin (Color : Black)
Leading Pin	Tin Plated Brass
Weight (Gram)	27.8


3. TESTING METHOD

· *Standard Measurement conditions*

Temperature:25±2°C Humidity:45-60%

· *Acoustic Characteristics*

The oscillation frequency, current consumption and sound pressure are measured by the measuring instruments shown below.

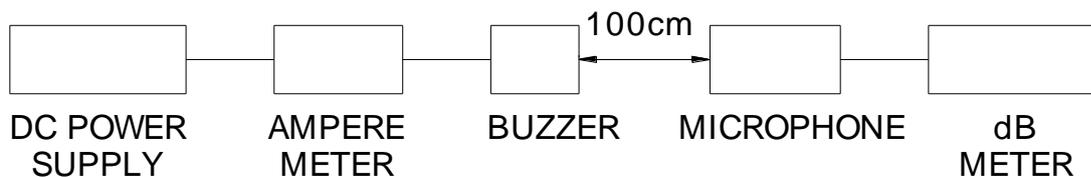



HITPOINT

TEL:8862-26013311

FAX:8862-26013898

NO.4 Lane 505, Zhongzheng Rd., Linkou Shiang, Taipei, Taiwan 24445

4. RELIABILITY

ITEMS	METHOD OF TEST AND MEASUREMENTS	PERFORMANCE
<i>Coldness withstanding</i>	<i>After 98 hours of being exposed to -30°C environment, should be returned to normal environment for 2 hours, then re-proceed to test.</i>	<i>No abnormality shall exist</i>
<i>Hotness withstanding</i>	<i>After 98 hours of being exposed to +80°C environment, should be returned to normal environment for 2 hours, then re-proceed to test.</i>	<i>No abnormality shall exist</i>
<i>Humidity withstanding</i>	<i>After 98 hours of being exposed to 40°C 95%RH environment in actual operation, should be returned to normal environment for 2 hours, then re-proceed to test.</i>	<i>No abnormality shall exist</i>
<i>Durability</i>	<i>10sec on/10sec off ; 98hours(17640 cycles)</i>	<i>No abnormality shall exist</i>
<i>Vibration withstanding</i>	<i>Linear vibrate frequency rate: 5~55Hz Time:180sec , applied in X, Y and Z directions for 3 times each.</i>	<i>No abnormality shall exist</i>

5. PACKAGE METHOD

< 1 > 1pcs per box , Total 320 boxes per carton , total 320pcs per carton;

Volume: L*W*H=520*335*290mm

< 2 > N . W . : 8.8KGS; G . W . : 10.8KGS

< 3 > RoHS Mark: