

YSL100F-100W SERIES



Input: 220-240V 50/60Hz
Output Voltage: 12V,24V,36V,48V
Rated Power: 100W max

Features


- Super compact Power Supply
- flicker-free Design
- Terminal block for Quick Connection
- Protections: Over Voltage, Overload, Short Circuit, Over Temperature:
- Class II Protection Design
- ERP: EU2019/2020
- RoHS Compliance
- 100% full load burn-in test



Application

LED strips
 LED indoor lighting
 LED decorative lighting
 LED building lighting

■ Dimensions and Installation

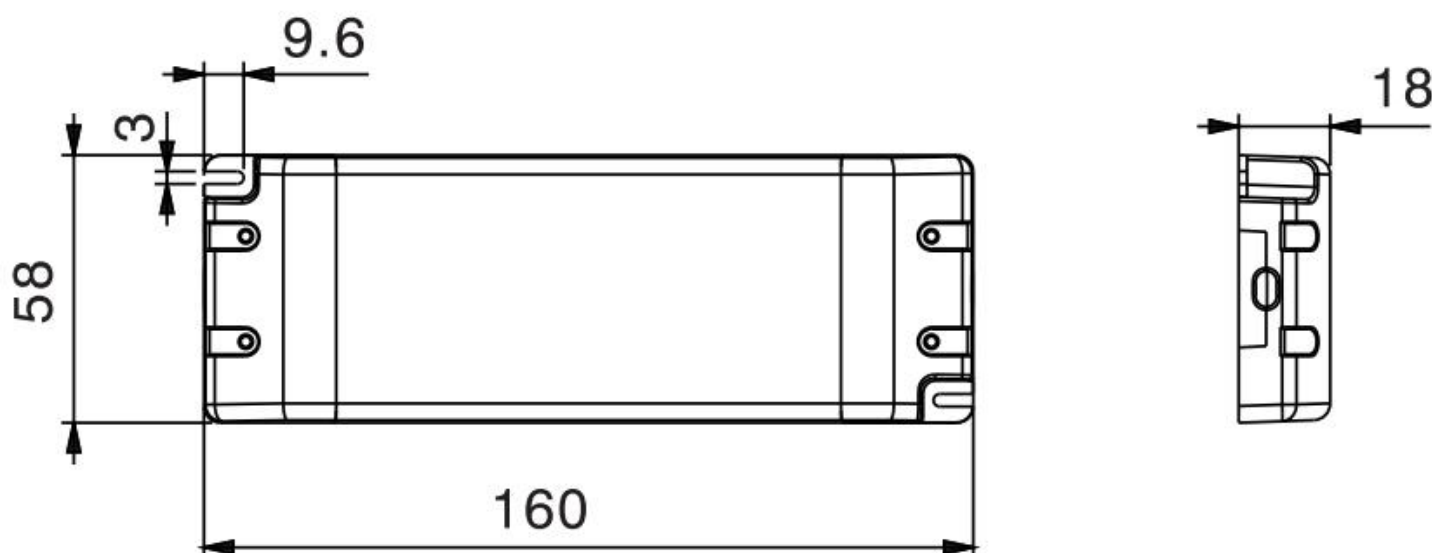


YSL100F-100W SERIES


| MODEL DETAIL SPEC. | | YSL100F-1208330 | YSL100F-2404160 | YSL100F-3602770 | YSL100F-4802080 |
|--------------------|------------------------------|--|-----------------|-----------------|-----------------|
| INPUT | Input Voltage: | 220-240VAC | | | |
| | Range of Input Voltage: | 198-264VAC | | | |
| | Input Frequency: | 50-60Hz | | | |
| | Input Current: | 0.7A MAX@Full Load | | | |
| | Inrush Current: | < 65 Amps at 230VAC/50Hz@full load | | | |
| | Leakage Current: | < 0.25mA/240VAC | | | |
| | THD (Full load): | < 20% | | | |
| | Unload Power Consumption: | < 0.5W | | | |
| | Average Efficiency: | 92% | | | |
| | Power Factor: | ≥0.9@Full Load 220-240VAC | | | |
| OUTPUT | DC Voltage: | 12V | 24V | 36V | 48V |
| | Rated Current(Max): | 8.33A | 4.16A | 2.77A | 2.08A |
| | Rated Power(Max): | 100W | 100W | 100W | 75W |
| | Voltage Tolerance: | ±5% | | | |
| | Ripple and Noise: | 400mVp-p | 400mVp-p | 400mVp-p | 400mVp-p |
| | Line Regulation: | ±3% | | | |
| | Load Regulation: | ±5% | | | |
| | Setup, Rise, Hold Up Time: | 1s, 10ms/60ms 230VAC @ full load | | | |
| ENVIRONMENTAL | Operating Temperature Ta: | -20°C ~ +45°C | | | |
| | Storage Temp: | -40°C ~ +85°C | | | |
| | Maximum Case Temperature Tc: | +85°C | | | |
| | Humidity: | 20 ~ 95% RH | | | |
| | Lifetime: | >30000hours@ta 40°C | | | |
| PROTECTION | Over Load: | Yes , Above 105%-130% rated output power Protection type: Hiccup mode, recovers automatically after fault condition is removed | | | |
| | Over Voltage: | Yes , 12V:13.8 ~ 16.2V 24V:27.6 ~ 32.4V 36V:41.4~48.6V 48V: 55.2~64.8V Protection type: Shut down o/p voltage, re-power on to recover | | | |
| | Short Circuit: | Yes , Protection type:Hiccup mode, recovers automatically after fault condition is removed | | | |
| | Over Temperature: | Yes , Protection type: Auto Restore | | | |
| | | | | | |
| SAFETY & EMC | Safety Regulations: | EN61347-2-13:2014+A1:2017,EN61347-1:2015+A1:2021;EN62493:2015 | | | |
| | Withstand Voltage: | I/P-O/P:3750VAC | | | |
| | Harmonic: | EN61000-3-2 Class C EN61000-3-3 | | | |
| | EMI: | Compliance to EN55015 | | | |
| | EMS: | Compliance to EN61547:2009 | | | |
| OTHER | MTBF: | 200,000 Hours Minimum at Full Load at 25°C Ambient | | | |
| | Case Material and Size: | Plastic | | | |
| | IP Grade: | IP20 | | | |
| | Size: | 160*58*18mm | | | |
| | Weight: | 255g / pcs | | | |
| | Packaging: | 50PCS/CTN,35*14.5*35cm | | | |

YSL100F-100W SERIES


**Deduction Curve
and Temperature**

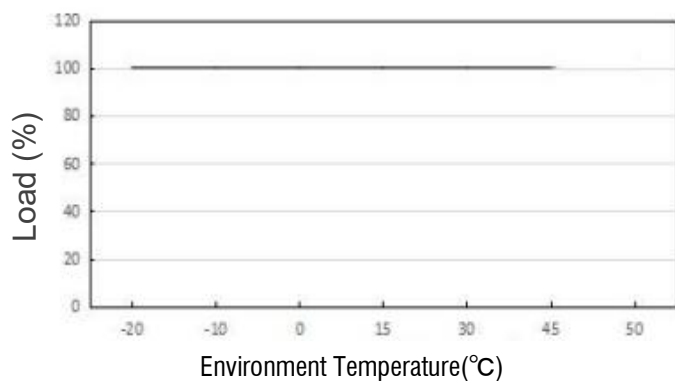


**Minus Output
and Input Voltage Curves**

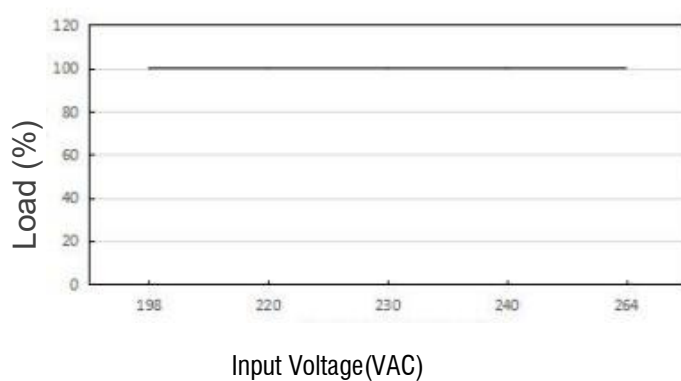


**Power Factor (PF)
Curves**

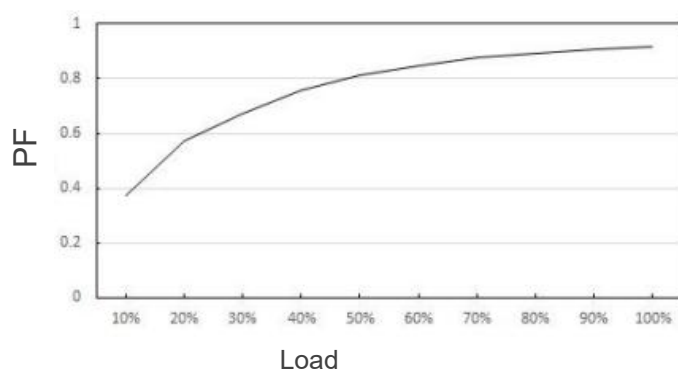

Efficiency Vs Load

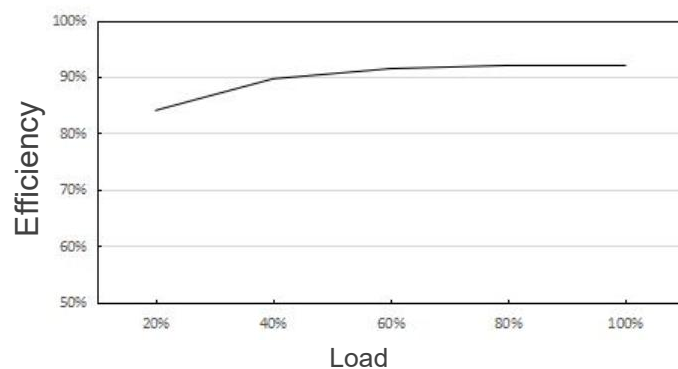

Wiring Diagram

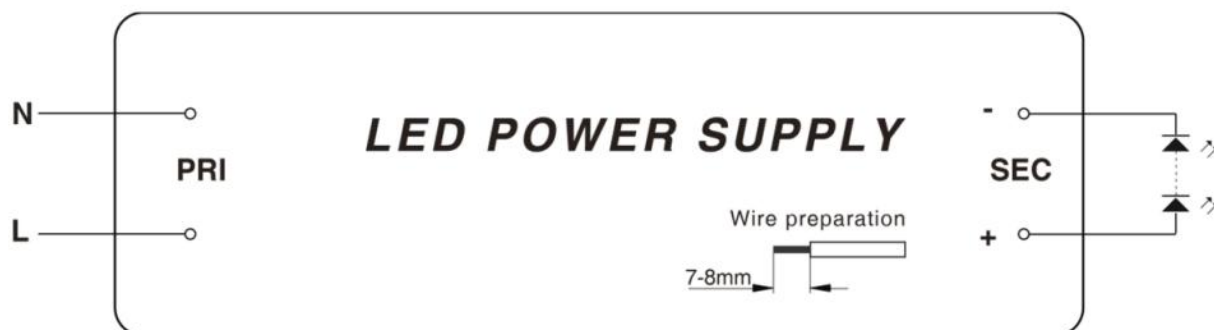

Manufacturer's address:

Cuijia, Xidian Town, Ninghai, Ningbo 315613, China

Tel: +86-574-87563856

<https://www.yingjiaodriver.com>