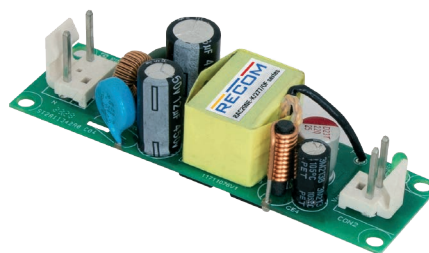
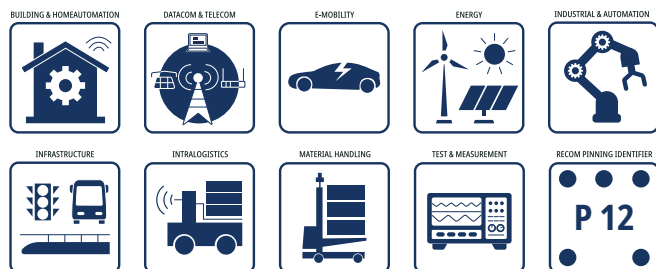


**RAC20NE-K/277 Series** ◇ AC/DC Power Supply

20W ◇ Input: 100V-277VAC

**FEATURES**

- 80-305VAC wide input range
- Full load ratings to 60°C, “/HT” to 85°C
- O/P either floating or coupled with GND, FE or PE
- Surge immunity 2kVAC: L-N &; 4kV: L; N - Earth
- OVC III over voltage category up to 5000m
- OCP: hiccup auto recovery or CV/CC regulated
- Boost power 23W (specific models) , “/HT”: peak: 36W
- High efficiency
- 3 year warranty

**APPLICATIONS****SAFETY & EMC****DESCRIPTION**

RAC20NE-K open frame or encapsulated solder mount built in power supplies are optimized for the requirements of new energy applications such as energy management, monitoring or actuator operation. These compact AC/DC modules meet increased requirements in terms of ambient temperatures, high immunity levels against transients, adopted insulation barriers, EMC interference freedom with secondary ground or earth coupling and low power loss in full load operation as well as in standby and sleep mode. For the supply of universal input voltages of 100 to 277 VAC, the modules are available in various versions according to worldwide industrial, household and safety transformer standards at operating altitudes of up to 5000 m or up to 3000 m under OVC III approved. High effective power density and industry standard P12 pinning on a 1"x2" footprint and 1.5"x2" for “/HT” fits in space critical applications.

**SELECTION GUIDE (CONSTANT VOLTAGE OPERATION)**

Part Number	Input Voltage Range [VAC]	Output Voltage [VDC]	Output Current nom. [mA]	Boost Current max. <sup>(1)</sup> [mA]	Efficiency <sup>(2)</sup> typ. [%]	Output Power continuous [W]
RAC20NE-12SK/277	85-305	12	1667	1916	87	20
RAC20NE-24SK/277	85-305	24	833	958	87	20
RAC20NE-36SK/277	85-305	36	555	638	88	20
RAC20NE-12DK/277	85-305	±12	+1.58/-0.083	+3000/-0.083	88	20

**SELECTION GUIDE (CONSTANT CURRENT OPERATION)**

Part Number	Input Voltage Range [VAC]	Output Voltage [VDC]	Output Current rated [mA]	Efficiency <sup>(2)</sup> typ. [%]	Output Power continuous [W]
RAC20NE-12SK/277/CC	85-305	12	1667	87	20
RAC20NE-24SK/277/CC	85-305	24	833	87	20

Note1: Refer to „**Boost Power Duty Cycle**“ (except “/277/OF” Version)

Note2: Efficiency is tested at 230VAC and full load at +25°C ambient.

**RAC20NE-K/277 Series** ◇ AC/DC Power Supply

20W ◇ Input: 100V-277VAC

**Model Numbering**

Note3: without suffix= standard constant voltage operation  
 add suffix "/CC" for constant current operation  
 add suffix "/OF" for open frame version  
 add suffix "/HT" for high ambient temperature and peak power ratings

**ORDERING INFORMATION**

Model	Output Voltage	Package Type			
		THT-solder mount			Open Frame "/OF"
		2.1" x 1.1"		2.1" x 1.5"	3.1" x 0.9"
		"/277"	"/277/CC"	"/277/HT"	"/277/OF"
RAC20NE-12SK/277	12VDC	y	y	N/A	y
RAC20NE-24SK/277	24VDC	y	y	N/A	y
RAC20NE-36SK/277	36VDC	y	N/A	N/A	N/A
RAC20NE-12DK/277	±12VDC	N/A	N/A	y	N/A

y= standard portfolio; N/A= not available

**ACCESSIBLE PART (ONLY VALID FOR "/277", "/277/CC" AND "/277/HT" VERSION)**

Part Number	Description	Datasheet Link
RAC-ADAPT-ST-1	adapter board with screw terminals for easy connection	<a href="#">RAC-ADAPT-ST-1.pdf</a>

**BASIC CHARACTERISTICS (measured @ T<sub>AMB</sub>= 25°C, nom. V<sub>IN</sub>, full load and after warm-up unless otherwise stated)**

Parameter	Condition	Min.	Typ.	Max.
Nominal Input Voltage	50/60Hz	100VAC		277VAC
Operating Range <sup>(4)</sup>	47-63Hz	85VAC		305VAC
	DC (pending)	120VDC		430VDC
Input Current	115VAC		350mA	450mA
	230VAC		250mA	450mA
	277VAC		200mA	450mA
Inrush Current	cold start at 25°C	115VAC		20A
		230VAC		40A
		277VAC		50A
No Load Power Consumption	115/230/277VAC		50mW	100mW
Ecodesign Standby Mode Use (Available output power for stated input power)	P <sub>IN</sub> = 0.5W	0.34W		
	P <sub>IN</sub> = 1.0W	0.74W		
	P <sub>IN</sub> = 2.0W	1.6W		
Input Frequency Range	AC Input	47Hz		63Hz
Minimum Load		0%		
Power Factor	115VAC		0.6	
	230VAC		0.5	
	277VAC		0.4	
Start-up time				150ms
Rise time		40ms		
Hold-up time	230VAC	30ms		
	277VAC	50ms		
Internal Operating Frequency				150kHz
Output Ripple and Noise <sup>(5)</sup>	20MHz BW			1% Vout

Note4: The products were submitted to all safety files at AC-operation. (90-305VAC)

Note5: Measurements are made with a 0.1µF MLCC &amp; 10µF E-cap in parallel across output (low ESR)



The test setup can have an impact on ripple noise values (placement of scope probe, capacitors, it's specifications, wires, PCB tracks, distances, etc.)

**RAC20NE-K/277 Series** ◇ AC/DC Power Supply

20W ◇ Input: 100V-277VAC

**BASIC CHARACTERISTICS** (measured @  $T_{AMB} = 25^{\circ}\text{C}$ , nom.  $V_{IN}$ , full load and after warm-up unless otherwise stated)

Valid for all Models

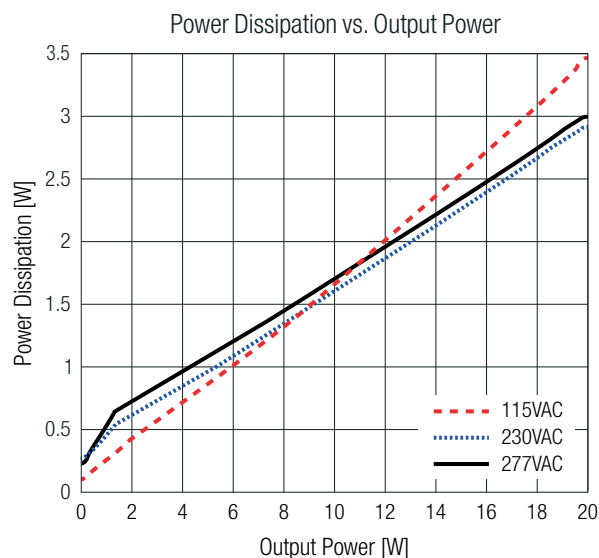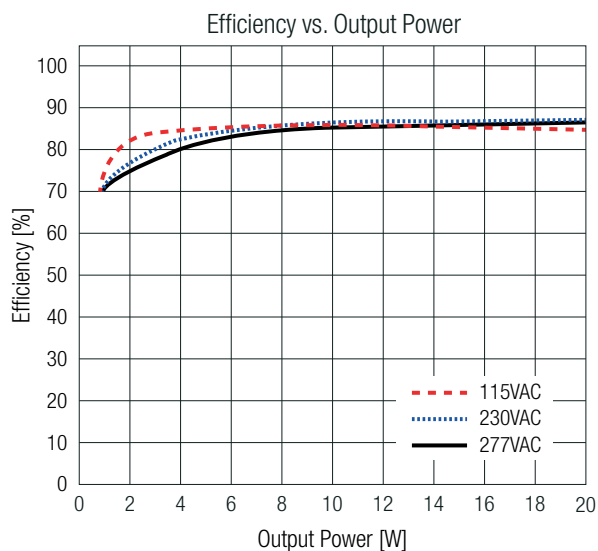**REGULATIONS** (measured @  $T_{AMB} = 25^{\circ}\text{C}$ , nom.  $V_{IN}$ , full load and after warm-up unless otherwise stated)

Parameter	Condition		Value
Output Accuracy	"/277", "/277/CC" & "/277/OF"		±2.0% max.
	"/277/HT"		±3.0% max.
Line Regulation	low line to high line, full load		±1.0% max.
Load Regulation <sup>(6)</sup>	10% to 100% load	"/277", "/277/CC" & "/277/OF"	2.0% max.
		"/277/HT"	5.0% max.
Cross Regulation	"/277/HT"		±5.0% max.
Transient Response	25% load step change	"/277", "/277/CC" & "/277/OF"	4.0% max.
		"/277/HT"	500mV max.
Recovery Time	"/277", "/277/CC" & "/277/OF"		500µs max.
	"/277/HT"		3000µs max.

Note6: Operation below 10% load will not harm the converter, but specifications may not be met

# RAC20NE-K/277 Series $\diamond$ AC/DC Power Supply


20W  $\diamond$  Input: 100V-277VAC

**PROTECTIONS** (measured @  $T_{AMB} = 25^{\circ}\text{C}$ , nom.  $V_{IN}$ , full load and after warm-up unless otherwise stated)



Parameter	Type		Value
Input Fuse <sup>(7)</sup>	"/277" and "/277/CC"		no internal fuse
	internal	"/277/OF"	T2A, slow blow type
		"/277/HT"	T3.15A, slow blow type
Short Circuit Protection (SCP)			hiccup mode; auto recovery
Over Current Protection (OCP)	"/277" and "/277/OF"		120% - 150%, hiccup mode
	"/277/CC"; refer to „Output Voltage vs. Output Current“		constant current limitation until hiccup mode
	"/277/HT"		120% - 150%, hiccup mode
Over Voltage Protection (OVP)	"/277", "/277/CC" and "/277/OF"		120% - 250%, latch off mode
	"/277/HT"		120% - 150%, latch off mode
Over Voltage Category (OVC)	"/277" and "/277/CC"		OVC III (5000m)
	"/277/OF"		OVC III (3000m)
			OVC II (5000m)
DC ON LED	only "/277/OF"		green: output voltage present
Class of Equipment			Class II
Isolation Voltage	I/P to O/P	1 minute	according to 61558
			according to 62368-1
Insulation Grade	I/P to O/P		reinforced

Note7: Refer to local safety regulations if input over-current protection is also required

## Protection Circuit for „/277“ and „/277/CC“ Versions

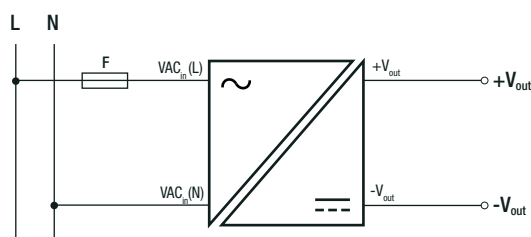

## Output Voltage vs. Output Current for „/277/CC“ Versions

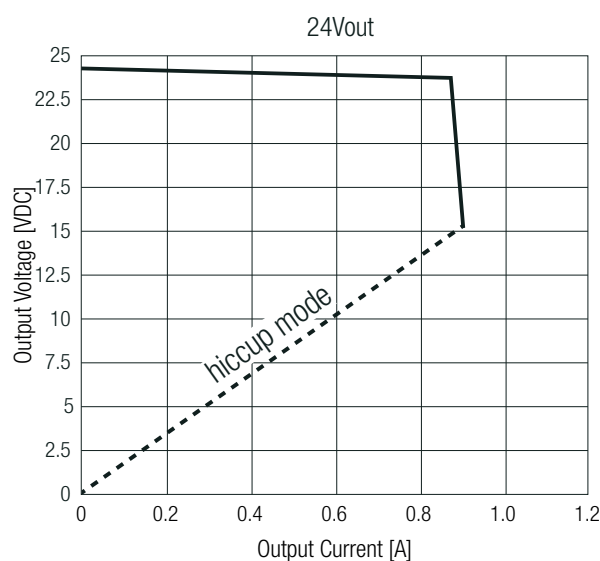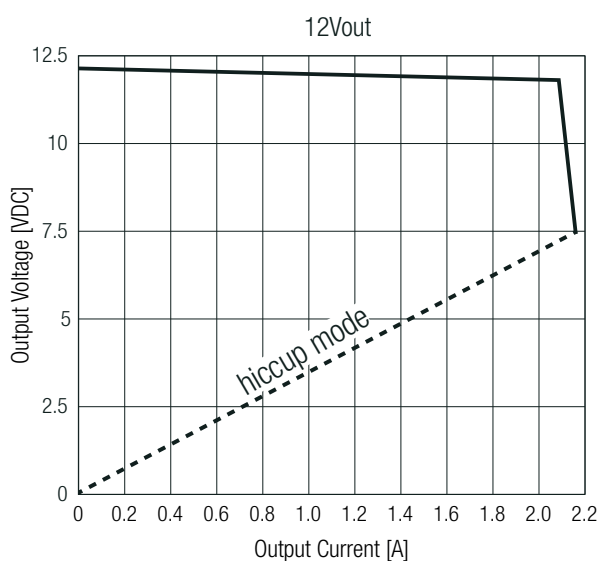

# RAC20NE-K/277 Series ◇ AC/DC Power Supply

20W ◇ Input: 100V-277VAC

ENVIRONMENTAL (measured @  $T_{AMB} = 25^{\circ}\text{C}$ , nom.  $V_{IN}$ , full load and after warm-up unless otherwise stated)

Parameter	Condition		Value
Operating Ambient Temperature Range	@ natural convection (0.1m/s)	refer to „Derating Graph“	-40°C to +85°C
Maximum Case Temperature	„/277“ and „/277/CC“		+95°C
Temperature Coefficient			±0.05%/K
Operating Altitude <sup>(8)</sup>	„/277“ and „/277/CC“		5000m (OVC III)
	„/277/OF“		3000m (OVC III)
	„/277“, „/277/CC“ and „/277/OF“		5000m (OVC II)
Operating Humidity			95% RH max.
Pollution Degree			PD2
MTBF	according to MIL-HDBK-217, G.B.	$T_{AMB} = +25^{\circ}\text{C}$	1190 x 10 <sup>3</sup> hours
Design Lifetime	full load	$T_{AMB} = +25^{\circ}\text{C}$	130 x 10 <sup>3</sup> hours

Note8: Recognized by safety agency for safe operation up to 5000m. High altitude operation may impact the performance and lifetime.


Please contact RECOM tech support for advice

## Derating Graph


(@ Chamber and natural convection 0.1m/s)

### THT-solder-mount


„/277“ Version

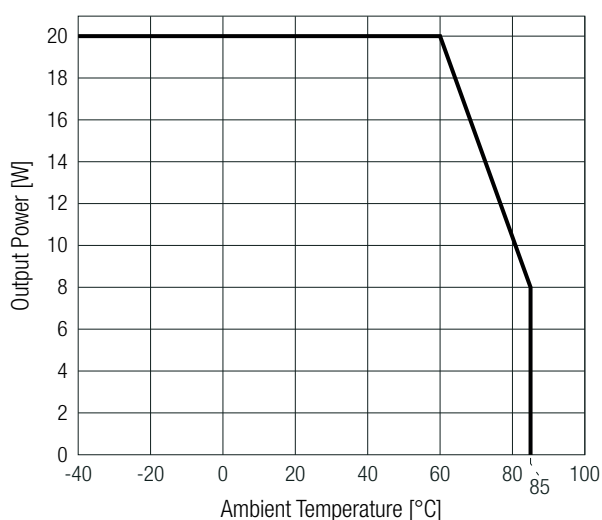

„/277/CC“ Version

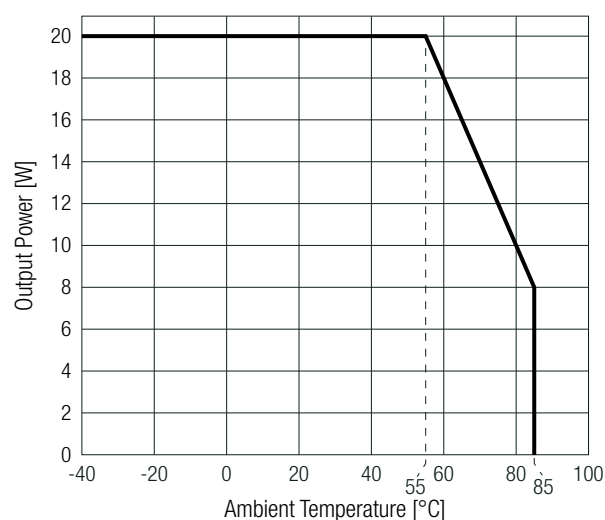


„/277/HT“ Version

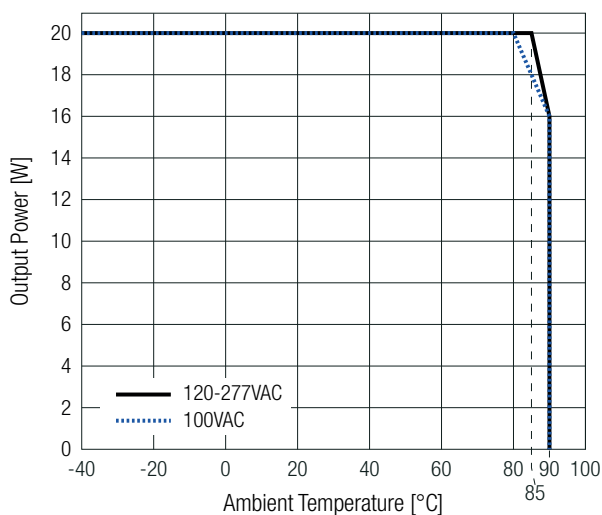

### Open frame / chassis mount

„/277/OF“ Version

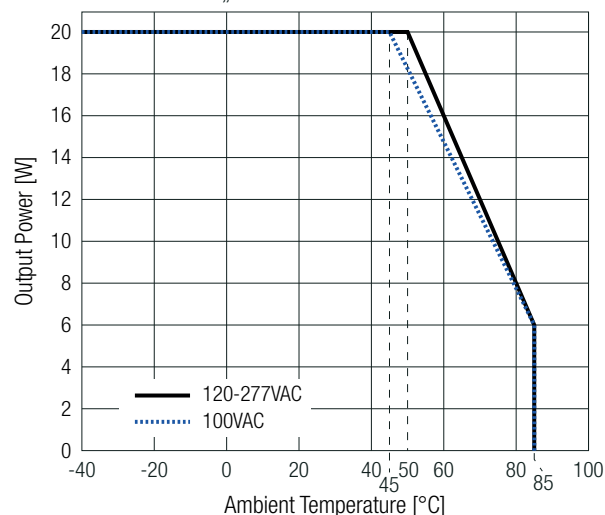


**RAC20NE-K/277 Series** ◇ AC/DC Power Supply

20W ◇ Input: 100V-277VAC

**BOOST POWER DUTY CYCLE** (EXCEPT "/OF" AND "/CC" MODELS) $P_{rated}$  = refer to „Derating Graph“ [W] $P_{Boost}$  = Boost power (<23W) [W] $P_r$  = recovery output power [W] $t_1$  = Boost time set (20s max.) [s] $t_2$  = recovery time (min. 2 x  $t_1$ ) [s]


$$P_r = \frac{P_{rated} \times (t_1 + t_2) - (P_{Boost} \times t_1)}{t_2}$$

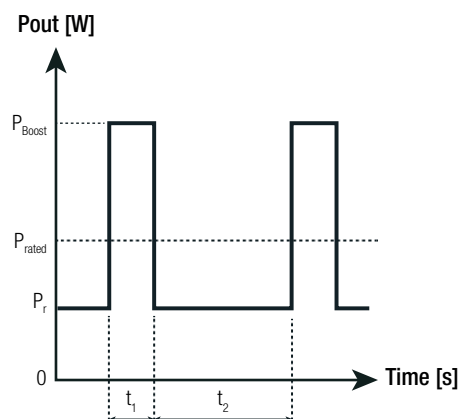**Practical Example (RAC20NE-12SK/277):**

Take the RAC20NE-12SK/277 at 230VAC input Voltage and full load at  $T_{AMB} = 80^\circ\text{C}$ , with natural convection.

 $P_{rated} = 10\text{W}$  $P_{Boost} = 23\text{W}$  $t_1 = 20\text{s}$  $t_2 = 50\text{s}$ 

$$P_r = \frac{10\text{W} \times (20\text{s} + 50\text{s}) - (23\text{W} \times 20\text{s})}{50\text{s}} = \underline{\underline{4.8\text{W}}}$$

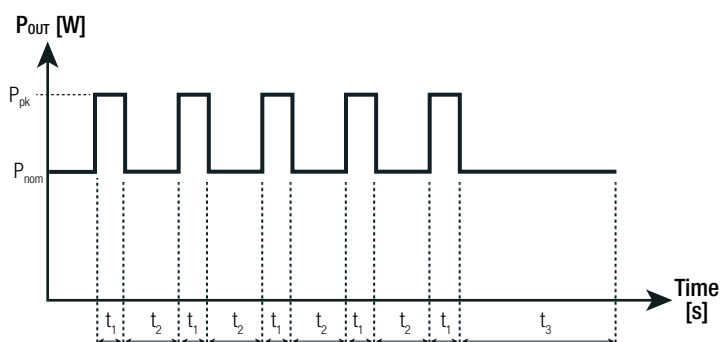**PEAK POWER DUTY CYCLE** (ONLY FOR "/277/HT" MODEL) $P_{nom}$  = nom. output power = 20W $P_{pk}$  = peak output power = 36W $t_1$  = peak time set = 100ms max. $t_2$  = nom. time set = 3s min. $t_3$  = recovery time set = 24hrs - (5x  $t_1$  + 4x  $t_2$ )**SAFETY & CERTIFICATIONS**

Certificate Type (Safety)	Report Number	Standard
Audio/Video, information and communication technology equipment - Part1: Safety requirements 3rd Edition	E491408-A6034-UL	UL62368-1:2019 3rd Edition
		CAN/CSA-C22.2 No. 62368-1-19 3rd Edition
Audio/Video, information and communication technology equipment - Part1: Safety requirements 3rd Edition	240408022	IEC62368-1:2018 3rd Edition
		EN IEC 62368-1:2020+A11:2020
Audio/Video, information and communication technology equipment - Part1: Safety requirements 3rd Edition	085-240223001-000	IEC62368-1:2018 3rd Edition
		EN IEC 62368-1:2020+A11:2020
Audio/Video, information and communication technology equipment - Part1: Safety requirements 3rd Edition	085-240223401-000	IEC62368-1:2018 3rd Edition
		EN IEC 62368-1:2020+A11:2020
Household and similar electrical appliances – Safety – Part 1: General requirements	64.110.24.02233.01	IEC60335-1:2010 + C1:2016 5th Edition
		EN60335-1:2012 + A15:2021
Measurement methods for electromagnetic fields of household appliances and similar apparatus with regard to human exposure	64.110.24.02233.01	EN62233:2008
Safety of power transformers, power supplies, reactors and similar products for supply voltages up to 1100 V 3rd Edition	085-240223101-000	IEC61558-1:2017 3rd Edition
		EN IEC 61558-1:2019
		IEC61558-2-16:2009+A1:2013 1st Edition
		EN61558-2-16:2009+A1:2013
Safety of power transformers, power supplies, reactors and similar products for supply voltages up to 1100 V Part 2: Particular requirements		

**RAC20NE-K/277 Series ◇ AC/DC Power Supply****20W ◇ Input: 100V-277VAC****SAFETY & CERTIFICATIONS**

Certificate Type (Safety)	Report Number	Standard
Lamp controlgear Part 1: General and safety requirements	085-240223201-000	IEC61347-1:2015+A1:2017 3rd Edition
		EN61347-1:2015+A1:2021
Lamp controlgear Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules		IEC61347-2-13:2014+A1:2016 2nd Edition
		EN61347-2-13:2014+A1:2017
EMC Compliance according to EN IEC61204-3	Condition	Standard / Criterion
Low voltage power supplies, d.c. output Part 3: Electromagnetic compatibility (EMC)		EN IEC 61204-3:2018
ESD Electrostatic discharge immunity test	Air: $\pm 2, 4, 8$ kV for "/277", "/277/CC" and "/277/OF" Contact: $\pm 6$ kV for "/277" and "/277/CC" Contact: $\pm 4$ kV for "/277/OF"	IEC61000-4-2:2008, Criteria A EN61000-4-2:2009, Criteria A
Radiated, radio-frequency, electromagnetic field immunity test	10V/m (80-1000MHz), 3V/m (1400-2000MHz), 1V/m (2000-2700MHz)	IEC/EN61000-4-3:2006 + A2:2010 Criteria A
Fast Transient and Burst Immunity	L, N, L-N $\pm 2$ kV for 24V and 36Vout versions	IEC/EN61000-4-4:2012, Criteria A
	L, N, L-N $\pm 2$ kV for 12Vout versions	IEC/EN61000-4-4:2012, Criteria B
	L, N, L-N $\pm 4$ kV for all versions	
Surge Immunity	L-N: 0.5, 1kV; for all versions	IEC/EN61000-4-5:2014 + A1:2017, Criteria A
	L-N: 2kV; for all versions	IEC/EN61000-4-5:2014 + A1:2017, Criteria B
	L-PE, N-PE: 1, 2kV; for all versions	IEC/EN61000-4-5:2014 + A1:2017, Criteria A
	L-PE: 4kV; for all versions; O/P connected to GND	IEC/EN61000-4-5:2014 + A1:2017, Criteria B
	N-PE: 4kV; for all versions; O/P connected to GND	IEC/EN61000-4-5:2014 + A1:2017, Criteria A
Immunity to conducted disturbances, induced by radio-frequency fields	10Vrms (0.15-80MHz)	IEC61000-4-6:2013, Criteria A EN61000-4-6:2014, Criteria A
Power Magnetic Field Immunity	30A/m	IEC61000-4-8:2009 / EN61000-4-8:2010
Voltage Dips and Interruptions	Dips: 100% (0.5P, 1.0P), 60%, 30%, 20%	IEC/EN61000-4-11:2004+A1:2017, Criteria A
	Interruption: 100%	IEC/EN61000-4-11:2004+A1:2017, Criteria B
Limits of Voltage Fluctuations & Flicker		EN61000-3-3:2013+A1:2019
EMC Compliance according to EN55032	Condition	Standard / Criterion
Electromagnetic compatibility of multimedia equipment – Emission Requirements	O/P either floating or earth coupled (FE; PE or GND)	EN55032:2015+A11:2020, Criteria B

**DIMENSION & PHYSICAL CHARACTERISTICS**



Parameter	Type		Value
Materials	case/baseplate	except "/277/OF"	plastic, (UL94 V-0)
	potting	except "/277/OF"	silicone, (UL94 V-0)
	PCB	all versions	FR4, (UL94 V-0)
Dimension (LxWxH)	"/277" and "/277/CC"		52.5 x 27.4 x 23.0mm 2.07 x 1.07 x 0.9 inch
	"/277/HT"		52.5 x 40.0 x 25.5mm 2.06 x 1.57 x 1.0 inch
	"/277/OF"		80.0 x 23.8 x 22.5mm 3.14 x 0.93 x 0.88 inch
Weight	"/277" and "/277/CC"		60g typ. 0.13 lbs
	"/277/HT"		93g typ. 0.20 lbs
	"/277/OF"		33g typ. 0.07 lbs

# RAC20NE-K/277 Series ◇ AC/DC Power Supply

20W ◇ Input: 100V-277VAC

## DIMENSION & PHYSICAL CHARACTERISTICS


Dimension Drawing “/277” & “/277/CC” (mm)

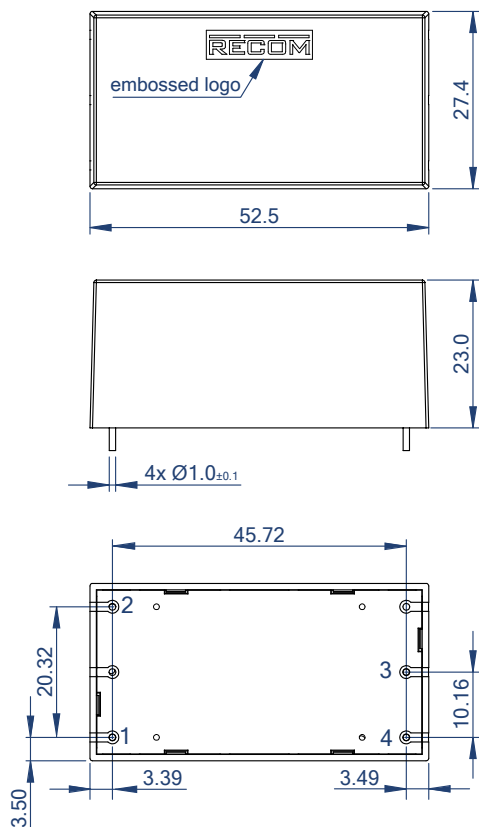

Pinning information [P12]


Pin #	Single
1	VAC in (N)
2	VAC in (L)
3	-Vout
4	+Vout

Recommended Footprint Details

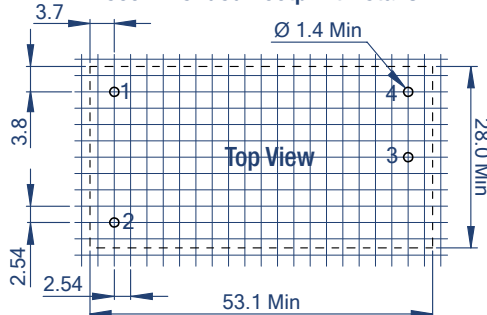

Tolerance: xx.x= ±0.5mm  
xx.xx= ±0.25mm

Dimension Drawing “/277/OF” Version (mm)

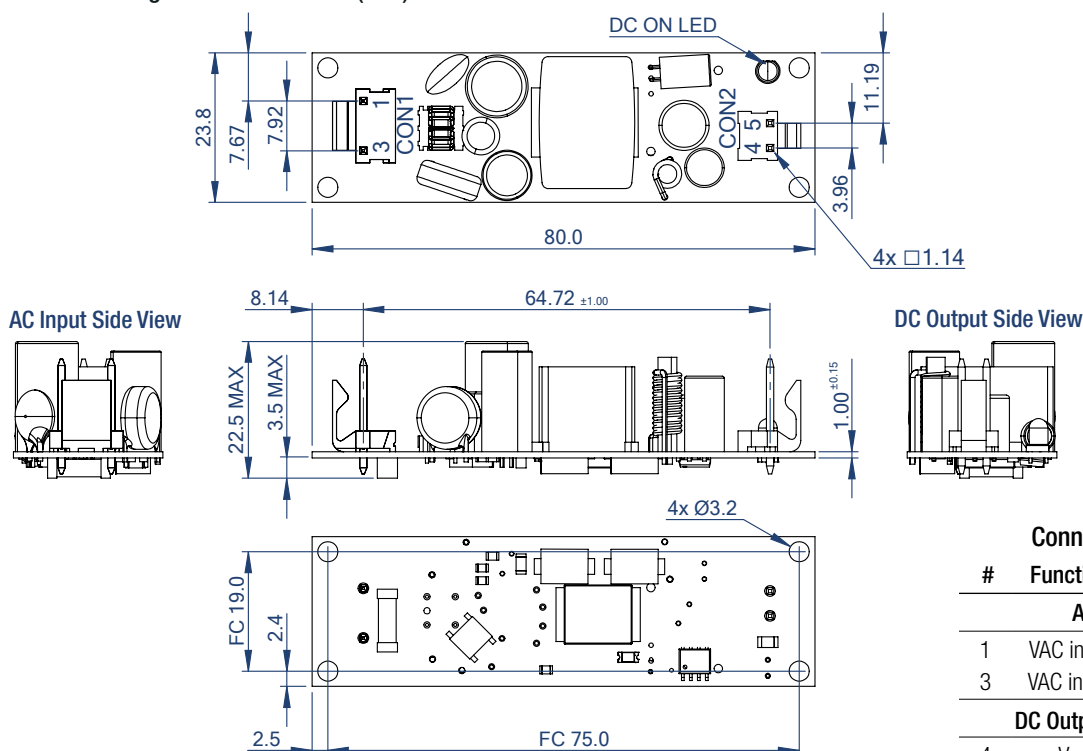

Connector Information

#	Function	Terminal
<b>AC Input (CON1)</b>		
1	VAC in (L)	3 Pins (Pin2 removed)
3	VAC in (N)	with 3.96mm pitch
<b>DC Output Connector (CON2)</b>		
4	+Vout	2 Pins
5	-Vout	with 3.96mm pitch



FC= fixing centers

Compatible Connector



Housing	Crimp Terminal
Molex 41695 Series or equivalent	Molex 2478 Series or equivalent

Tolerance: xx.x= ±0.5mm  
xx.xx= ±0.25mm



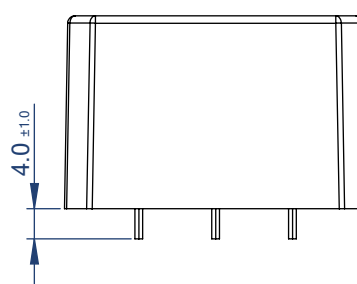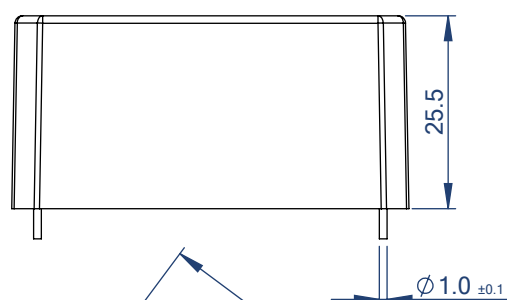


## Recommended Footprint Details

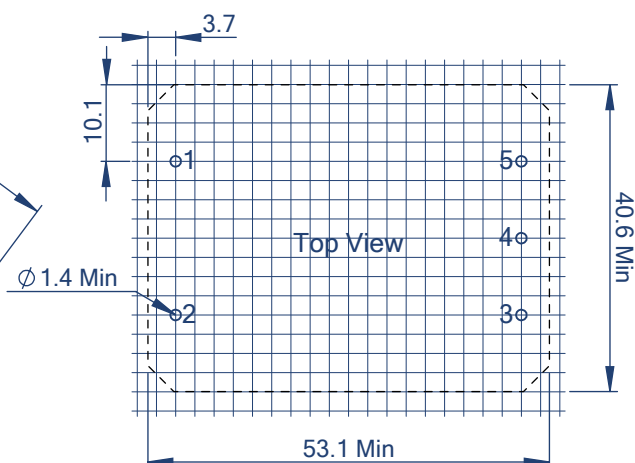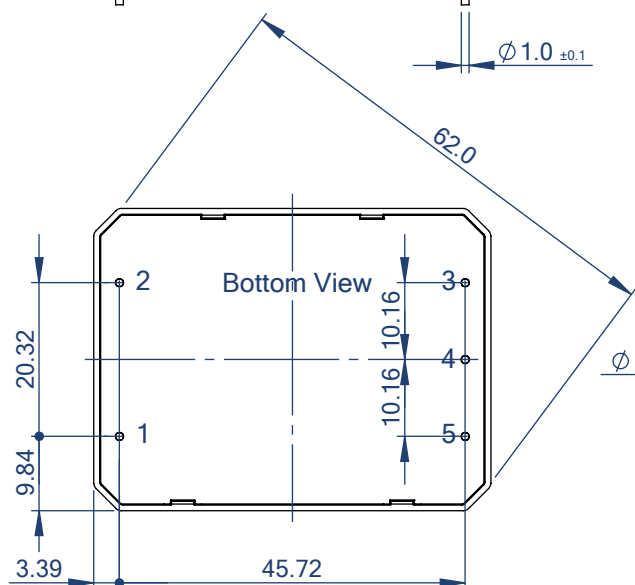

Tolerance: xx.x=  $\pm 0.5\text{mm}$   
xx.xx=  $\pm 0.25\text{mm}$


## BLOCK DIAGRAMM

**THT-solder-mount (“/277 & “/277/CC)**

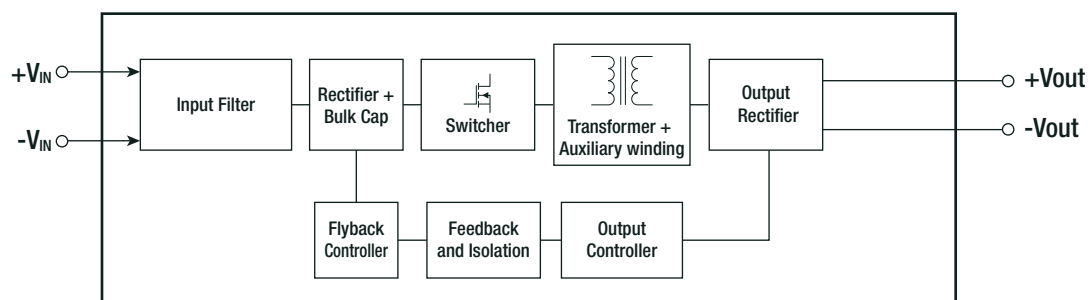


BLOCK DIAGRAMM

THT-solder-mount (“/277/HT”)

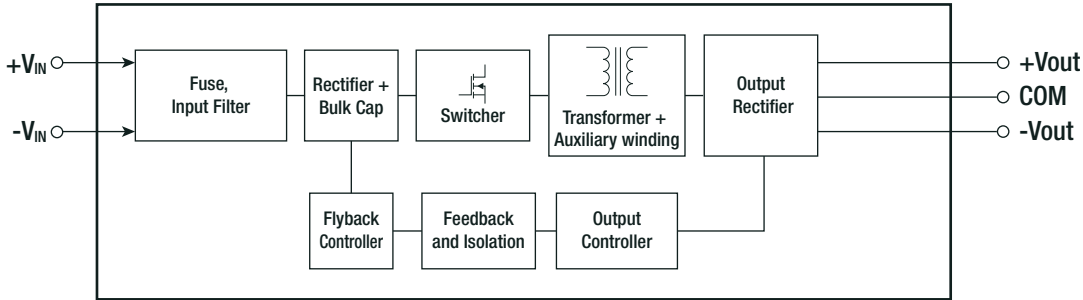

Open frame / chassis mount (“/277/OF”)

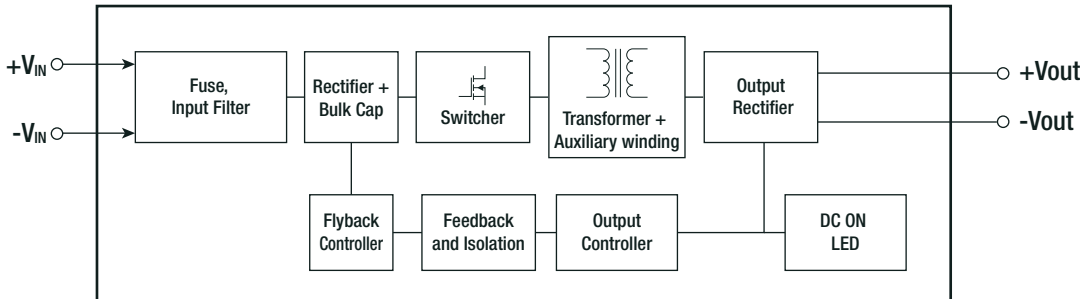

PACKAGING INFORMATION

Parameter	Type		Value
Packaging Dimension (LxWxH)	"/277", "/277/CC" & "/277/HT"		490.0 x 56.0 x 40.0mm
	"/277/OF"		365.0 x 210.0 x 46.0mm
Packaging Quantity	tube	"/277" & "/277/CC"	15pcs
		"/277/HT"	11pcs
	tray		18pcs
Storage Temperature Range			-40°C to +90°C
Storage Humidity			95% RH max.

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.