
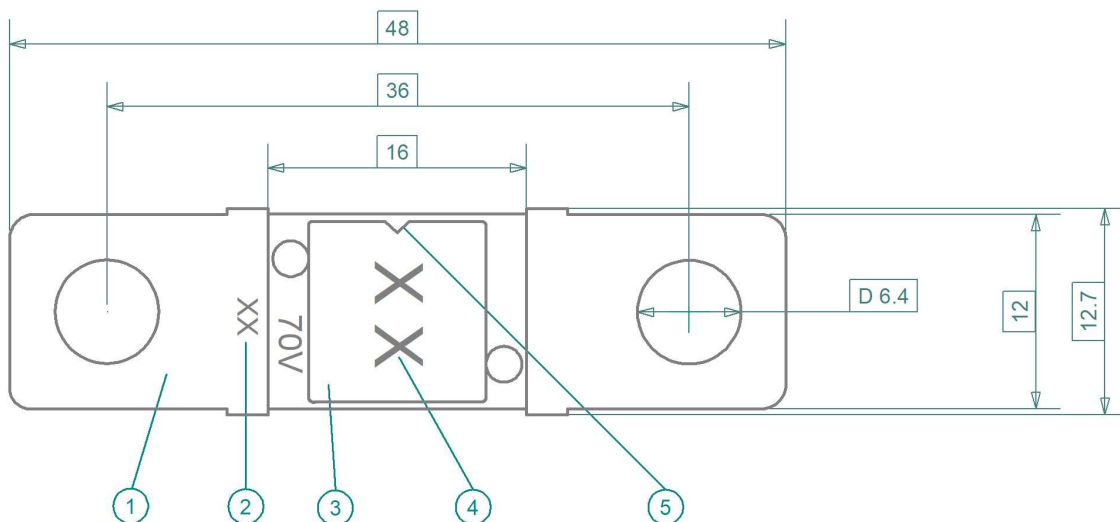


iMaXX ref.	Rating	Volt	Color
	[A]	[V]	
MTX030	30	70	orange
MTX040	40	70	green
MTX050	50	70	red
MTX060	60	70	yellow
MTX070	70	70	brown
MTX080	80	70	white
MTX100	100	70	blue
MTX125	125	70	pink
MTX150	150	70	grey
MTX175	175	70	tan
MTX200	200	70	violet

1	Cu element, Sn plated
2	Stamped rating in element
3	PA66 thermoplastic housing
4	Fuse rating print (OCR)
5	Fixed housing notch for orientation
*	0.4 for 30 - 100A / 0.6 for 125 - 200A

Fusing time ISO 20934 [s]		
Load [%]	Minimum [s]	Maximum [s]
100 %	360,000	-
135 %	300	3600
150 %	90	500
200 %	1	50
300 %	0.3	4
500 %	0.1	1
600 %	0.07	0.7

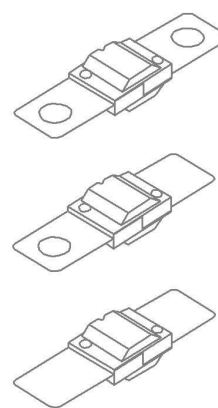

3D not to scale.
For special applications also available with single or double clinch tabs (no holes).

Revisions			Date	Appr.	
Date	Type	Drawn	09/24	GRH	
		Checked	09/24	BE	
		Standards			
		Approved	09/24	SS	
			</		