
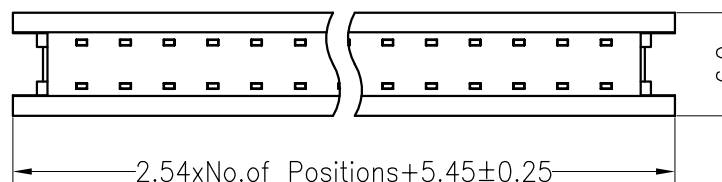

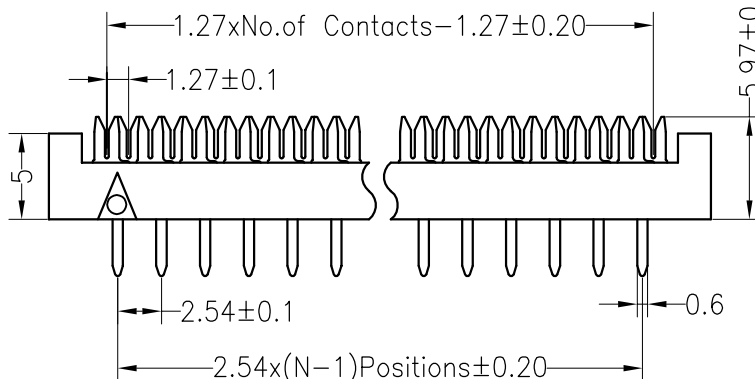

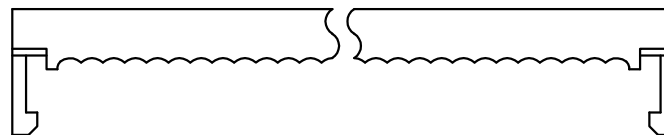


HSF RoHS

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass/Phosphor Bronze
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

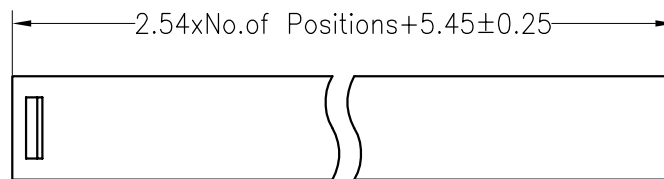

Ordering Information

5410 XX X XX X 01

No. of Pins 06~64P	Contact Material B=Brass P=Phosphor Bronze	Contact Plating G0:Gold Flash G1:3U"Gold G2:5U"Gold G3:10U"Gold G4:15U"Gold G5:30U"Gold S0:Gold Flash/Ni	Color Type B=Black G=Grey
-----------------------	--	---	---------------------------------

OPERATION		DRAW	yiyusheng	19.01.15	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	◆
DIM	TOL					

JILN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

A0	2019.01.15	NEW DRAWING	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE

PART NO. 5410XXXXXX01
 TITLE: 2.54 DIP NPin two type