

# HSF RoHS

## SPECIFICATIONS

Rated Current: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass(Standard) Or Phosphor Bronze  
 Contact Plating: Au Over Ni  
 Insulator Material: PBT(Ul94V-0)

## Ordering Information

3810 65 01 C XX X XX




Plastics Height 65=6.5mm

No. of Pins

Contact Plating  
 G1:1U" Gold  
 G2:1.5U" Gold  
 G3:2U" Gold  
 G4:3U" Gold  
 G5:5U" Gold  
 NN:1U" Gold/Ni

Color Type  
 B=Black(Standard)  
 U=Blue  
 R=Red  
 W=White  
 Y=Yellow

Code Stream

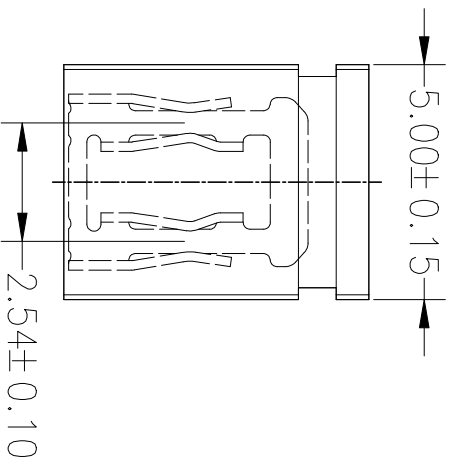

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	Jelly Feng	2023.07.20	SCALE		FIT	PART NO.	TITLE:
				UNIT	mm				SIZE	A4			
A0	2023.07.20	NEW DRAWING		X.X	±0.30	CHECK			PROJ.			381065010XXXXX	2.54 Mini Jumper H=6.5mm Close Type
1				X.XXX	±0.20								
				X.XXX	±0.10								
				Angle	±3°	APPROVE							
				DIM	TOL								

**JILIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONICS CO.,LTD  
 Tel: 86-755-27483253 Fax: 86-755-2997-5588