

HSF ROHS

SPECIFICATIONS


Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au Over Ni
 Insulator Material: Polyester (UL94V-0)
 Max. Processing Temp:
 (PBT) 245°C ± 5°C For 5~10 Second


Ordering Information

3810 60 01 0 XX X XX

Plastics Height 45=4.5mm 60=6.0mm
 No. of Pins 01=Sing Type
 Contact Plating
 G1:1U" Gold
 G2:1.5U" Gold
 G3:2U" Gold
 G4:3U" Gold
 G5:5U" Gold
 NO:1U" Gold/Ni
 NN:NI
 Color Type
 B=Black
 U=Blue
 R=Red
 W=White
 Y=Yellow
 Code Stream




2.40 ± 0.15

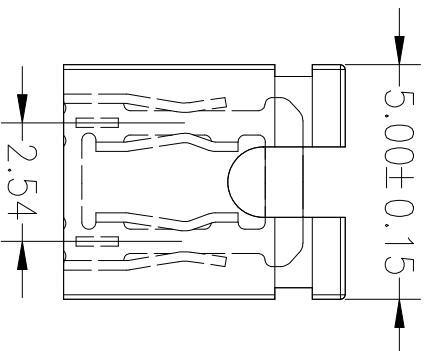

5.00 ± 0.15

2.54



0.70

6.00 ± 0.15

		OPERATION		DRAW		SCALE		FIT		PART NO.	
		X.X	±0.30	Jelly Feng		UNIT		mm		SHENZHEN JINLING ELECTRONICS CO.,LTD	
		X.XX	±0.20	2023.07.20		SIZE		A4		Tel: 86-755-27483253 Fax: 86-755-2997-5588	
		X.XXX	±0.10	CHECK		SHEET		1/1		381060010XXXXX	
A0		NEW DRAWING		APPROVE		PROJ.		1/1		TITLE:	
REV		DATE		CHANGE		DIM		TOL		2.54 Mini Jumper H=6.0mm Open Type	
1		2		3		4		5		6	
7		8		9							

jiln 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

381060010XXXXX

2.54 Mini Jumper H=6.0mm Open Type