HSF RoHS FILE NO :E362810

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:30mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40℃ to +105℃

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PBT
Max.Processing Temp: 245℃± 5℃ For 5～10Second

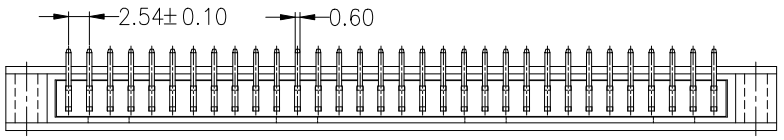

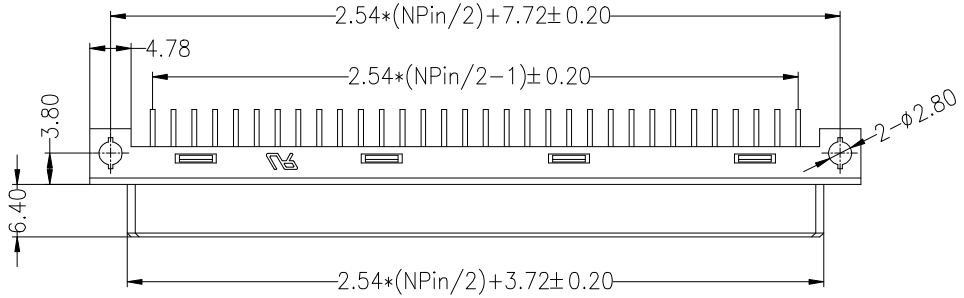



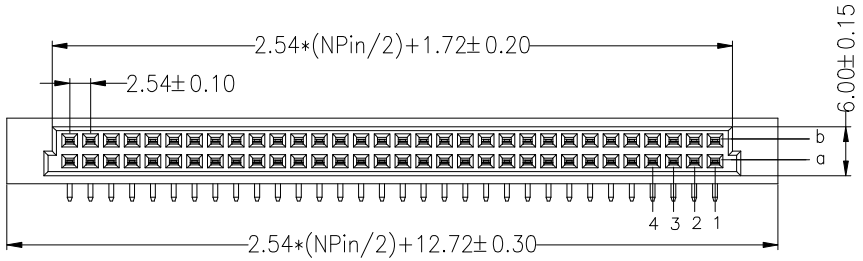

Ordering Information

35112 XX B F R XX PNA X

No.of Pins	Contact Type	Contact Plating	Code Stream
NPin N=10、12、16 20、32、44 48、64	F=Female	G0:Gold Flash S0:Gold Flash/Tin S1:3U" Gold/Tin S2:5U" Gold/Tin S3:10U" Gold/Tin S4:15U" Gold/Tin	

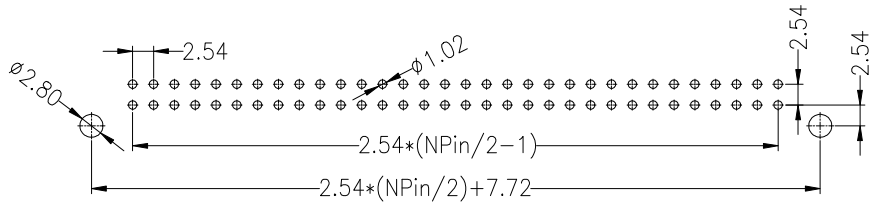

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE± 0.05)

Dimension antitheses list	
ITEM	A
Standard	2.90

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
B	2014.09.16	增加UL标识	
A0	2014.04.11	NEW DRAWING	

OPERATION		DRAW	YiYuSheng	14.09.16	SCALE	FIT
X.X	± 0.30				UNIT	mm
X.XX	± 0.20	CHECK			SIZE	A4
X.XXX	± 0.10				SHEET	1/1
Angle	± 3°	APPROVE			PROJ.	
DIM	TOL					

JILN® 深圳锦凌电子股份有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD
Tel：86-755-27483253 Fax：86-755-2997-5992

PART NO.	35112XXBFRXXPNAX
TITLE:	欧式插座 母座 90度 2xNP 成品系列图