

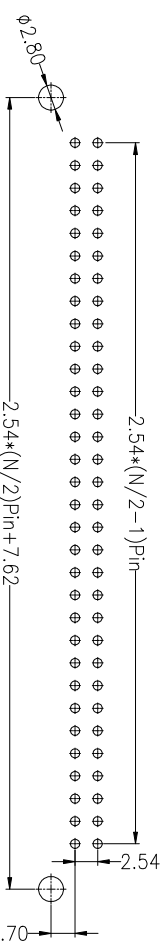
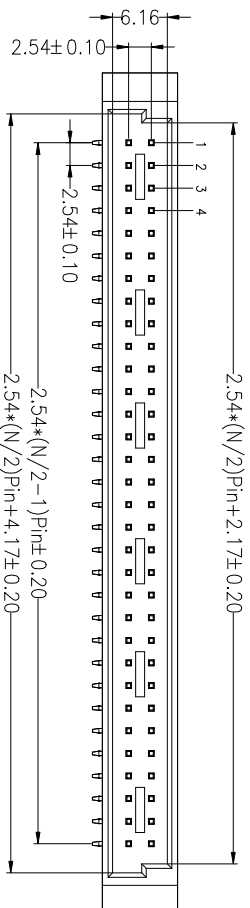


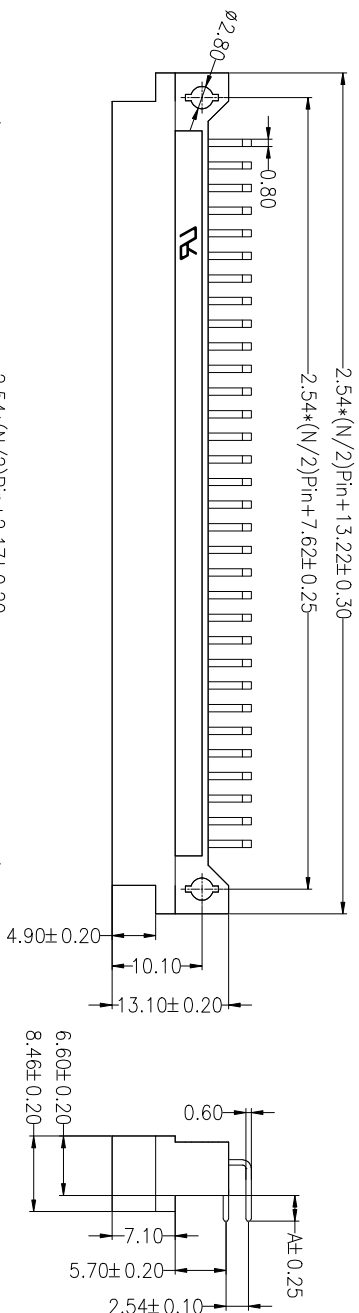

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 245°C±5°C 5~10Second

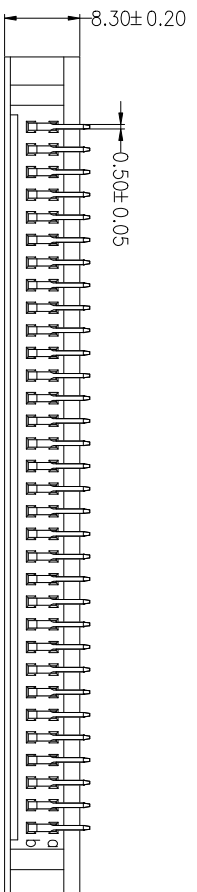

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	2.90

Ordering Information

35112 XX B M R XX BNA X

No. of Pins
 10, 16, 20
 32, 44, 48
 64

Contact Type
 M= male

Contact Plating
 G0: Gold Flash
 S0: Gold Flash/Tin
 S1: 30U" Gold/Tin
 S2: 50U" Gold/Tin
 S3: 100U" Gold/Tin
 S4: 150U" Gold/Tin

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	Jelly Feng	2022.03.20	UNIT	mm	A4	1/1	35112XXBMRXXBNA X	
X.XX	±0.20	CHECK		SIZE	SHEET		TITLE:		
X.XXX	±0.10	APPROVE		ANGLE	PROJ.		欧式插座 公座 90度 成品系列图		
Angle	±3°	APPROVE		PROJ.		TITLE:			
DIM	TOL	APPROVE		PROJ.		TITLE:			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM		TOL		
A0	2022.03.20	NEW DRAWING							
1									

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5588