

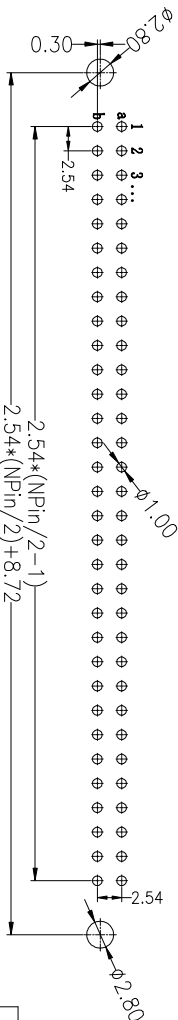
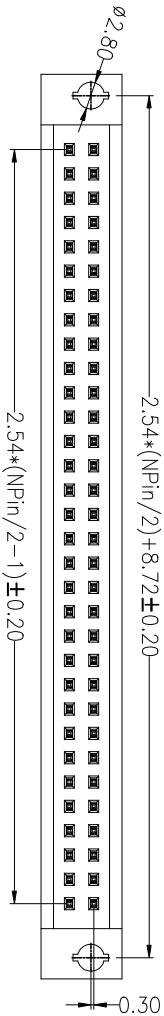



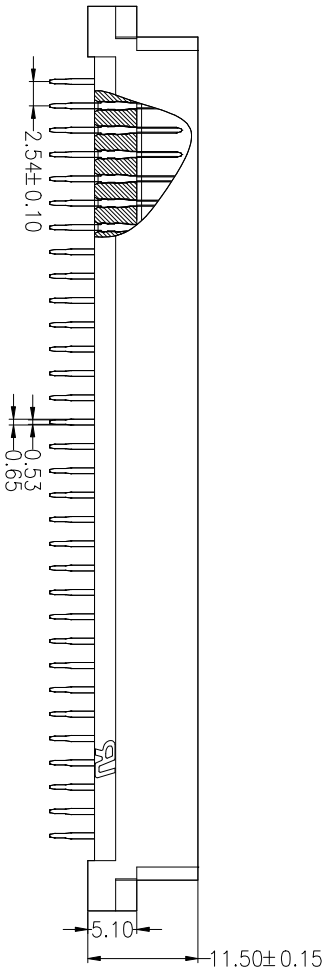

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Max.Processing Temp:
 (PBT)245°C±5°C For 5~10 Second

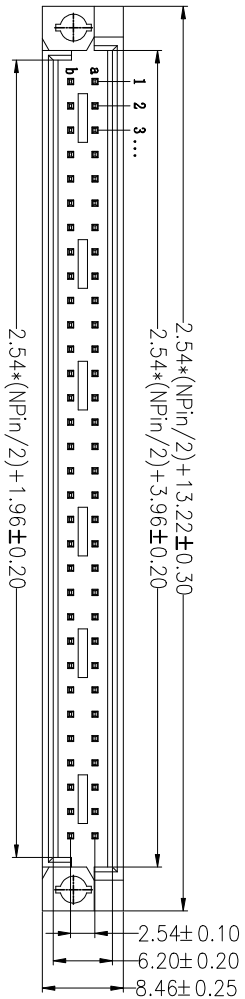

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standord	4.00

Ordering Information

35112 XX B M S XX X N A X

No.of Pins	Contact Type	Contact Plating	Material	Code Stream
NPin	M=Male	GG:Gold Flash	B=Brass+PBT	
N=10, 16, 20		S0:Gold Flash/Tin		
32, 40, 44, 48		S1:3U" Gold/Tin		
64		S2:5U" Gold/Tin		
		S3:7U" Gold/Tin		
		S4:15U" Gold/Tin		
		S5:30U" Gold/Tin		

OPERATION	±0.30
X.X	±0.20
X.XX	±0.10
X.XXX	±3°
Angle	
DIM	TOL

OPERATION	DRAW	Jelly Feng	2022.03.20
CHECK			
APPROVE			

SCALE	FIT	UNIT	mm
SHEET	A4	SIZE	1/1
PROJ.			
PART NO.	35112XXBMSXXXXX		
TITLE:	DIN41612 Dual Row Straight Male		

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5888

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2022.03.20	NEW DRAWING	
1			