







**SPECIFICATIONS**

Rated Current: 3.0AMP  
 Contact Resistance: 30mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Max. Processing Temp: (PBT) 245°C ± 5°C For 5~10 Second

| No. of Pin | G  |
|------------|----|
| 20         | 4  |
| 32         | 6  |
| 64         | 10 |

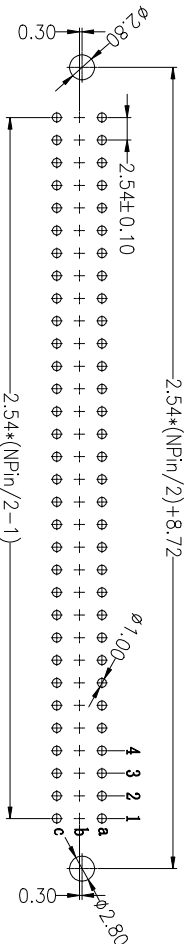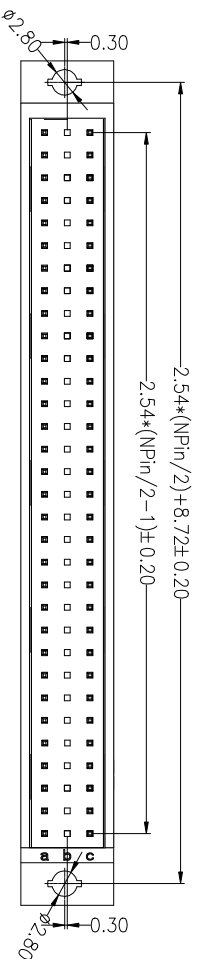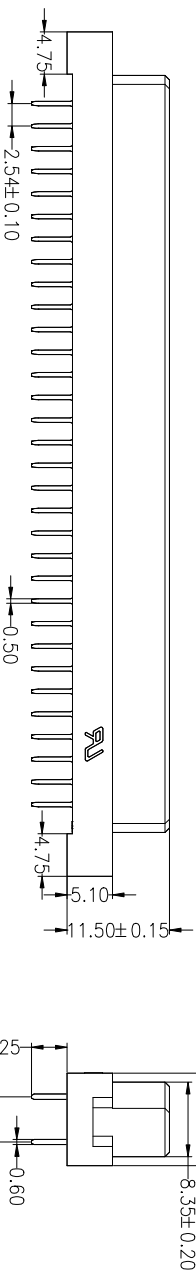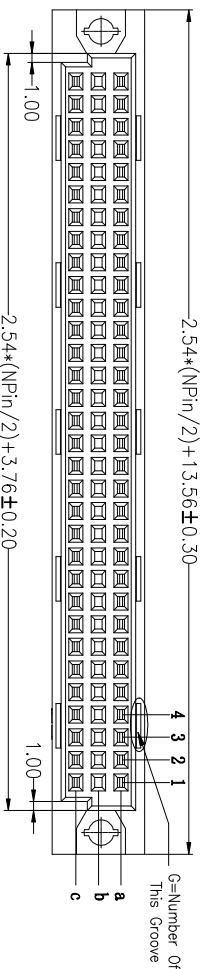

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ± 0.05)

| Dimension antitheses list |      |
|---------------------------|------|
| ITEM                      | A    |
| Standard                  | 4.00 |

**Ordering Information**

35113 XX C F S XX X N A X

No. of Pins NPin  
 N=20, 32, 64  
 Contact Type F=Female  
 Contact Plating G0:Gold Flash  
 S0:Gold Flash/Tin  
 S1:30U" Gold/Tin  
 S2:30U" Gold/Tin  
 S3:10U" Gold/Tin  
 S4:15U" Gold/Tin  
 S5:30U" Gold/Tin  
 Material B=Brass+PBT  
 P=Phosphor Bronze  
 +PBT  
 C=Brass+PA6T  
 Code Stream



Tel: 86-755-27483253 Fax: 86-755-2997-5588

35113XXCFSSXXXNAX

欧式插座 母座 180度 成品系列图

| REV | DATE       | MODIFICATION DESCRIPTION | CHANGE | DIM   | TOL   | APPROVE |
|-----|------------|--------------------------|--------|-------|-------|---------|
| A0  | 2023.12.21 | NEW DRAWING              |        | X.XXX | ±0.10 | CHECK   |
| 1   |            |                          |        | X.X   | ±0.30 | DRAW    |

| OPERATION | SCALE | FIT | PART NO.          |
|-----------|-------|-----|-------------------|
| X.X       | UNIT  | mm  | 35113XXCFSSXXXNAX |
| X.XXX     | SIZE  | A4  |                   |
| X.XXX     | SHEET | 1/1 |                   |
| Angle     | PROJ. |     |                   |
| ±3°       |       |     |                   |

1 2 3 4 5 6 7 8 9