


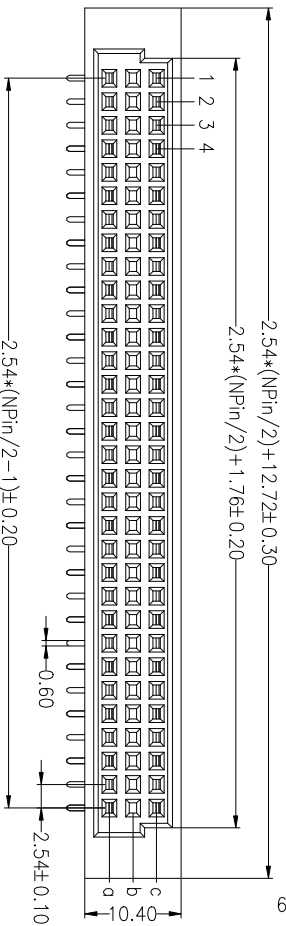


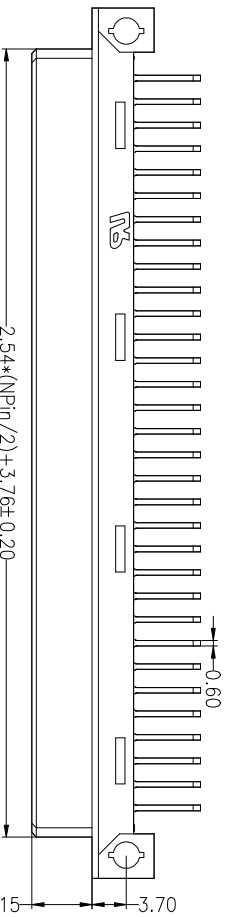

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C


Contact Material: Brass
 Contact Plating: Au Over Ni
 Insulator Material: Polyester(UL94V-0)
 Max.Processing Temp:
 (PBT)245°C±5°C For 5~10 Second

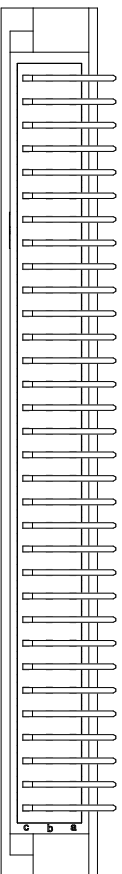

Ordering Information

35113 XX C F R XX B N A X

No.of Pins N=32,64
 NPin F=Female
 Contact Type GO:Gold Flash
 Contact Plating S0:Gold Flash/Tin
 S1:3U" Gold/Tin
 S2:5U" Gold/Tin
 S3:10U" Gold/Tin
 S4:15U" Gold/Tin
 S5:30U" Gold/Tin
 Code Stream

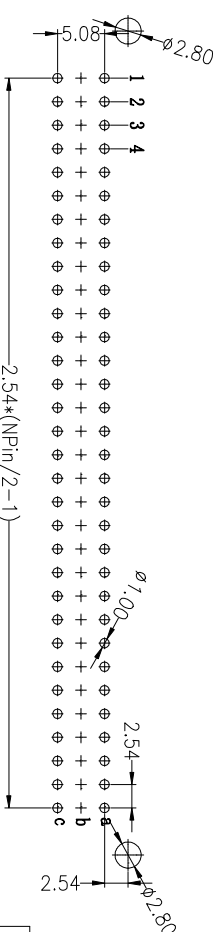

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	2.90

JIN 深圳锦凌电子股份有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel : 86-755-27483253 Fax: 86-755-2997-5588

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	PROJ.	PART NO.	TITLE:
A0	2024.08.15	NEW DRAWING		X.XXX	±0.10	CHECK		35113XXCFRXXBNAX	欧式插座 母座 90° DIP

OPERATION	SCALE	UNIT	FIT
X.X	±0.30	mm	
X.XX	±0.20		
X.XXX	±0.10	A4	
Angle	±3°	SHEET	1/1
DIM		PROJ.	

1	2	3	4	5	6	7	8	9	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	PROJ.	PART NO.	TITLE:
A0	2024.08.15	NEW DRAWING		X.XXX	±0.10	CHECK		35113XXCFRXXBNAX	欧式插座 母座 90° DIP