HSF RoHS

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:30mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Max.Processing Temp:
(PBT)245°C±5°C For 5~10 Second

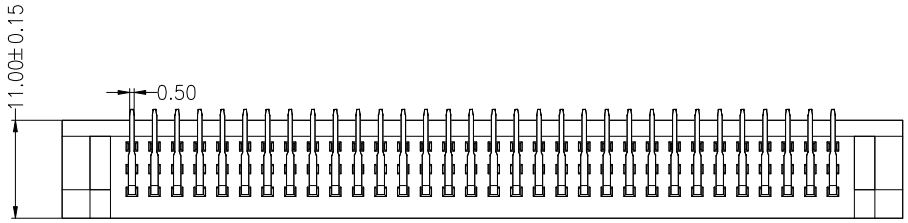

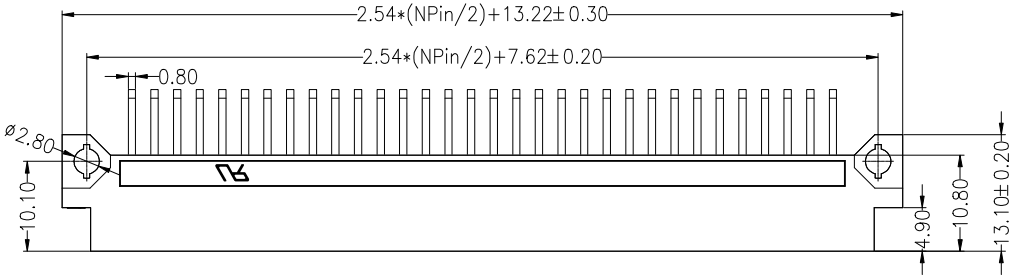



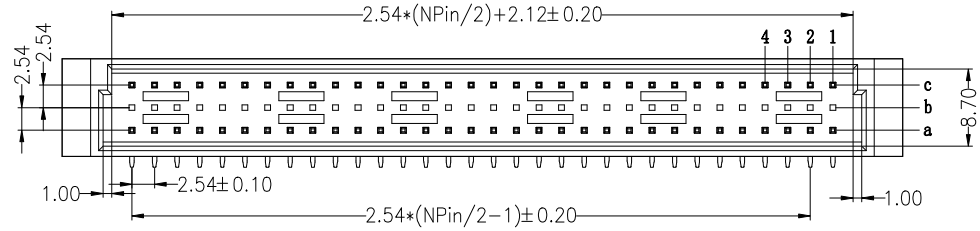

注：缺b排

Ordering Information

3511 3 XX C M R XX X N A X

- No.of Pins: NPin, N=20、32、64
- Contact Type: M=Male
- Contact Plating: G0:Gold Flash; S0:Gold Flash/Tin; S1:3U" Gold/Tin; S2:5U" Gold/Tin; S3:10U" Gold/Tin; S4:15U" Gold/Tin; S5:30U" Gold/Tin
- Material: B=Brass+PBT; C=Brass+PA6T
- Harpoon: W=With Harpoon; N=W/O Harpoon
- Code Stream

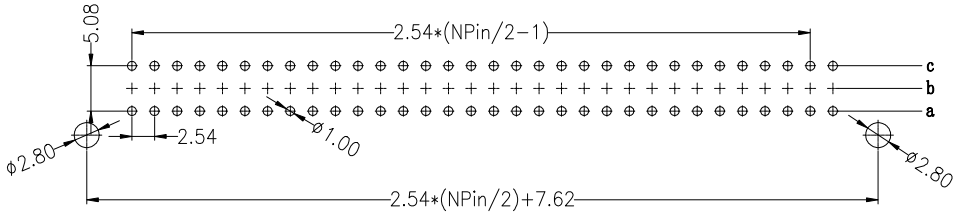

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	3.00

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2022.03.20	NEW DRAWING	

OPERATION				
X.X	±0.30	DRAW	Jelly Feng	2022.03.20
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD
Tel：86-755-27483253 Fax：86-755-2997-5588

PART NO.	35113XXCMRXXXNAX
TITLE:	欧式插座 公座 90度 缺b排 带鱼叉 成品系列图