

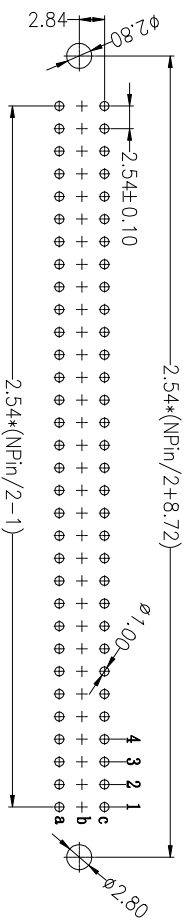


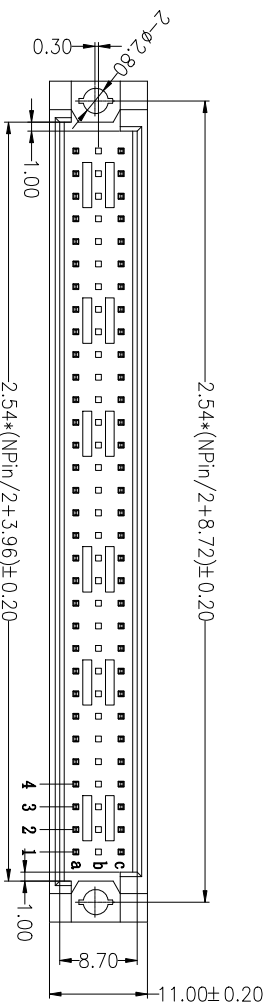

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Max.Processing Temp:
 (PBT)245°C±5°C For 5~10 Second

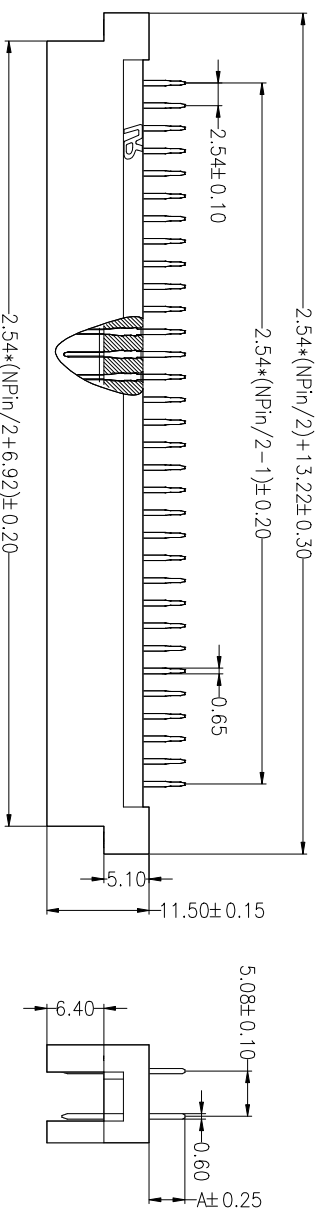

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	4.00

Ordering Information

35113 XX C M S XX X N A X

No.of Pins NPin
 N=20、32、64
 Contact Type F=Female
 Contact Plating G0:Gold Flash
 S0:Gold Flash/Tin
 S1:3U" Gold/Tin
 S2:5U" Gold/Tin
 S3:10U" Gold/Tin
 S4:15U" Gold/Tin
 S5:30U" Gold/Tin
 Material B=Brass+PBT
 Code Stream

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	Jelly	Feng	UNIT	mm	A4	1/1	35113XXCMSXXXXX	
X.XX	±0.20	CHECK		SIZE	A4	SHEET		SHENZHEN JINLING ELECTRONICS CO.,LTD	
X.XXX	±0.10	APPROVE		ANGLE	±3°	PROJ.		Tel: 86-755-27483253 Fax: 86-755-2997-5588	
REV	DATE	CHANGE		DIM	TOL	TITLE:		深圳市锦凌电子有限公司	
1	2022.03.20	NEW DRAWING				1/1		SHENZHEN JINLING ELECTRONICS CO.,LTD	
MODIFICATION DESCRIPTION		CHANGE				1/1		Tel: 86-755-27483253 Fax: 86-755-2997-5588	

欧式插座 公座 180° 成品系列图

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5588