

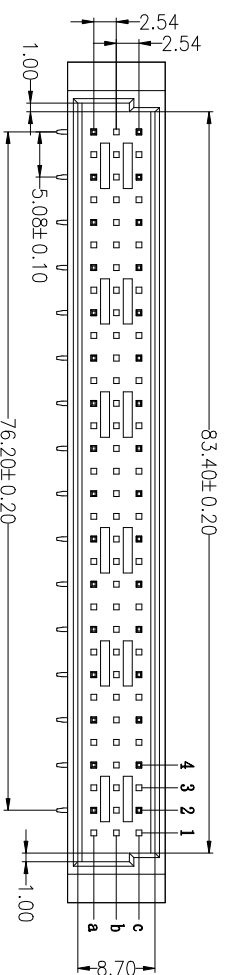



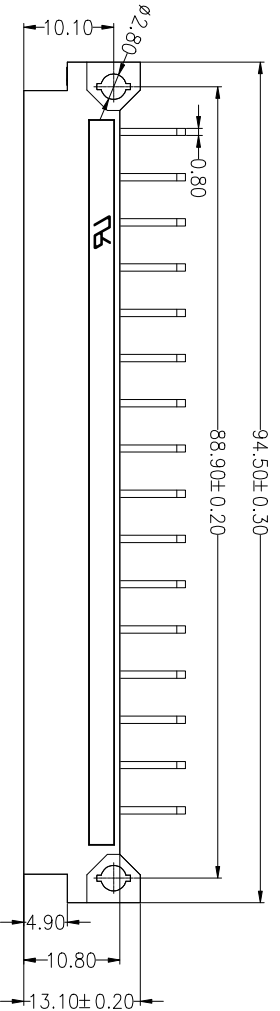

**SPECIFICATIONS**

Rated Current: 3.0AMP  
 Contact Resistance: 30mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Max. Processing Temp:  
 (PBT) 245°C ± 5°C For 5~10 Second

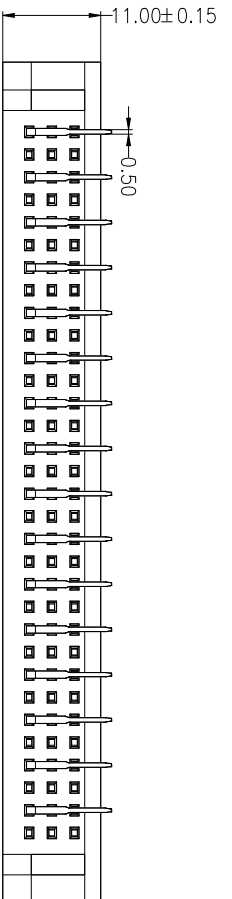


注: b排全缺, a,c排缺  
 所有奇数PIN

**Ordering Information**

3511 3 64 F M R XX X N A X

Model Flins N=Pin N=64  
 Contact Type F=Female  
 Contact Plating 60Gold Flash /in S130U Gold /in S250U Gold /in S410U Gold /in S4130U Gold /in S530U Gold /in  
 Material B=Brass+PBT  
 Harpoon W=With Harpoon N=With Harpoon  
 Code Stream

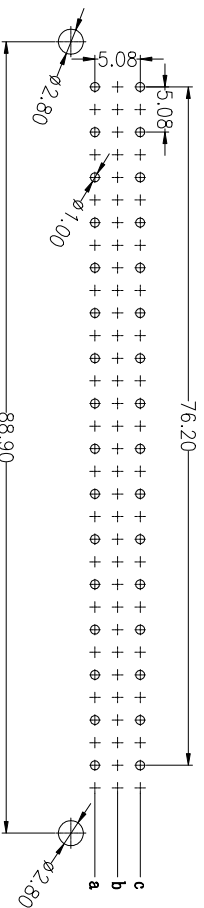

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

Dimension antitheses list	
ITEM	A
Standard	3.00

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	Jelly Feng	2022.03.20	UNIT	mm	A4	1/1	3511364FMRXXNAX	
X.XX	±0.20	CHECK		SIZE					
X.XXX	±0.10			SHEET	1/1				
Angle	±3°	APPROVE		PROJ.					
DIM	TOL								

**JILIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONICS CO.,LTD  
 Tel: 86-755-27483253 Fax: 86-755-2997-5888

欧式插座 公座 90度 缺PIN

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	TITLE:
A0	2022.03.20	NEW DRAWING			
1					