


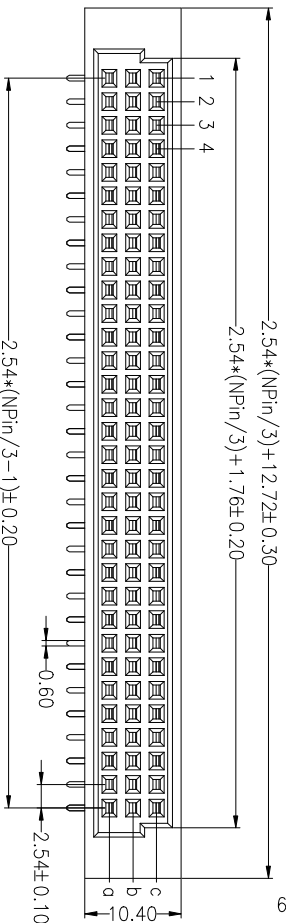


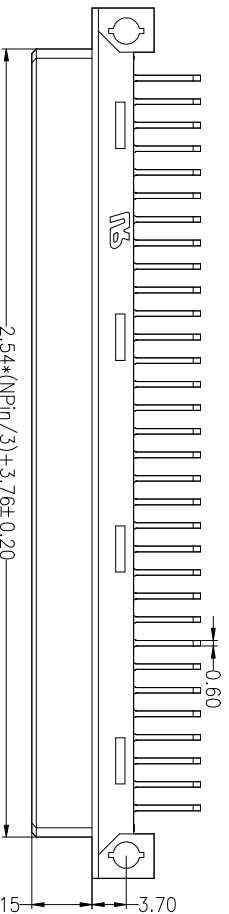

### SPECIFICATIONS

Rated Current: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40℃ to +105℃


Contact Material: Brass  
 Contact Plating: Au Over Ni  
 Insulator Material: Polyester(UL94V-0)  
 Max.Processing Temp:  
 (PBT)245°C±5°C For 5~10 Second

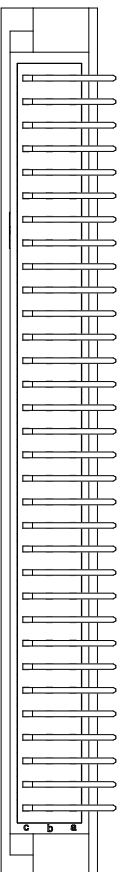

## Ordering Information

35113 XX A F R XX B N A X

No.of Pins Contact Type Contact Plating Code Stream  
 NPin F=Female 60:Gold Flash  
 N=21,30,48, S0:Gold Flash/Tin  
 S1:3U" Gold/Tin  
 S2:5U" Gold/Tin  
 S3:10U" Gold/Tin  
 S4:15U" Gold/Tin  
 S5:30U" Gold/Tin

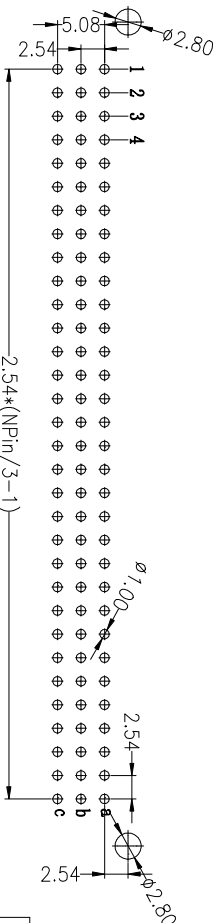

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	2.90

**JIN** 深圳锦凌电子股份有限公司  
 SHENZHEN JINLING ELECTRONICS CO.,LTD  
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	SCALE	FIT	PART NO.	TITLE:
A0	2024.08.15	NEW DRAWING					mm	A4	35113XXAERXXBNAX	欧式插座 母座 90°

OPERATION	SCALE	UNIT	SIZE	SHEET	PROJ.	PROJ.
X.X	±0.30	mm	A4	1/1		
X.XX	±0.20					
X.XXX	±0.10					
Angle	±3°					

1	2	3	4	5	6	7	8	9					
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	SCALE	FIT					
A0	2024.08.15	NEW DRAWING					mm	A4					
<p><b>JIN</b> 深圳锦凌电子股份有限公司          SHENZHEN JINLING ELECTRONICS CO.,LTD          Tel: 86-755-27483253 Fax: 86-755-2997-5588</p>													
<p>Dimension antitheses list</p> <table border="1"> <thead> <tr> <th>ITEM</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>2.90</td> </tr> </tbody> </table>										ITEM	Value	A	2.90
ITEM	Value												
A	2.90												
<p>35113 XX A F R XX B N A X</p>													
<p>Ordering Information</p>													
<p>SPECIFICATIONS</p> <p>Rated Current: 3.0AMP          Contact Resistance: 20mΩ Max          Withstand Voltage: 1000V AC/DC          Insulation Resistance: 1000MΩ Min          Operation Temperature: -40℃ to +105℃</p>													
<p>Contact Material: Brass          Contact Plating: Au Over Ni          Insulator Material: Polyester(UL94V-0)          Max.Processing Temp:          (PBT)245°C±5°C For 5~10 Second</p>													