




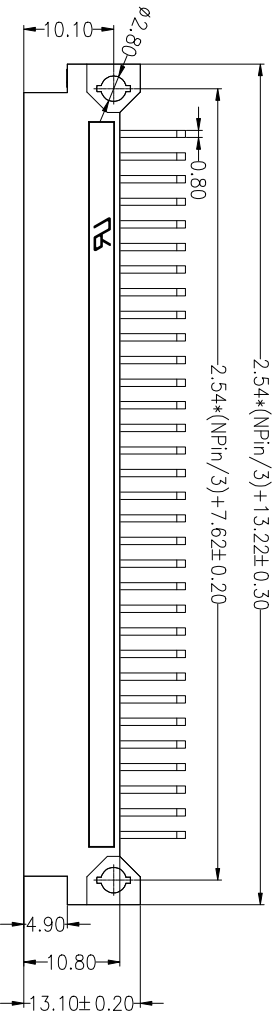

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C



Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Max.Processing Temp:
 (PBT)245°C±5°C For 5~10 Second

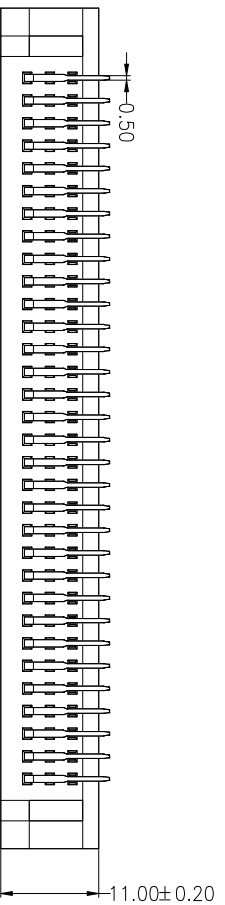

Ordering Information

3511 3 XX A M R XX X N A X

No of Pins: M=21, 30, 42, 48, 96
 Contact Type: F=Female
 Contact Plating: 60Gold Flash/Tin, 50Gold Flash/Tin, S120U Gold/Tin, S250U Gold/Tin, S310U Gold/Tin, S4130U Gold/Tin, S530U Gold/Tin
 Material: B=Brass+PBT
 Harpoon: W=With Harpoon, N=With Harpoon
 Code Stream

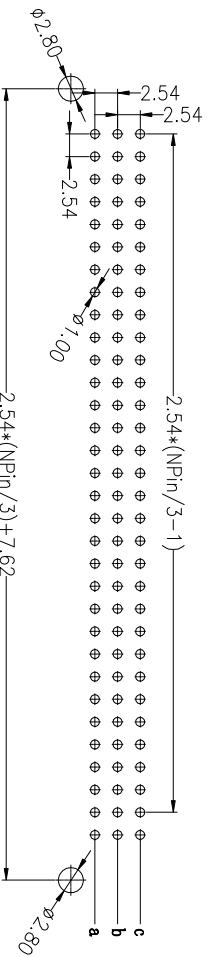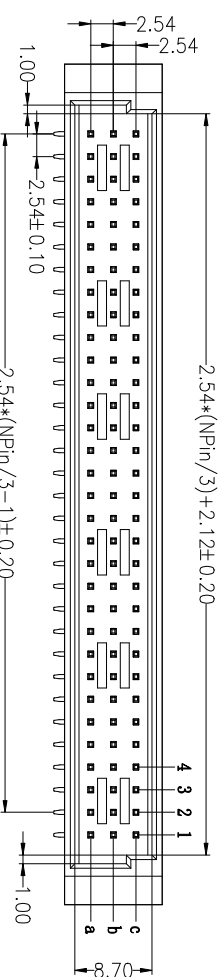

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Dimension anttheses list	
ITEM	A
Standard	3.00

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5888

PART NO. 35113XXAMRXXXNAX

TITLE: 欧式插座 公座 90度 成品系列图

OPERATION	DRAW	Jelly Feng	2022.03.20	SCALE	FIT	
X.X	±0.30			UNIT	mm	
X.XX	±0.20	CHECK		SIZE	A4	
X.XXX	±0.10			SHEET	1/1	
Angle	±3°	APPROVE		PROJ.		
DIM	TOL					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2022.03.20	NEW DRAWING	
1			