HSF RoHS

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:1Ω Max
Withstand Voltage:500V AC/Min
Insulation Resistance:100MΩ Min
Voltage Rating:250V AD,DC
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Resistance To Soldering Heat:
245° C±5° C, 10s(PBT insulator)

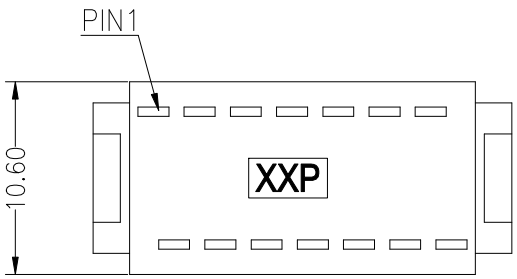

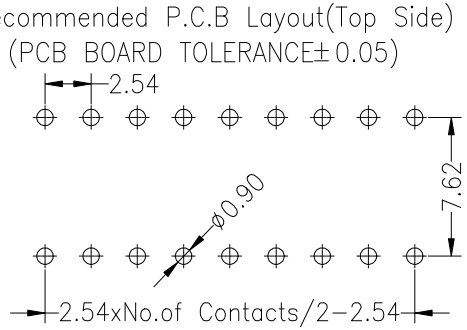

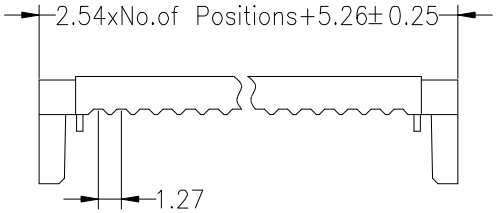



Ordering Information

5450 - XX B XX X XX

- No.of Pins: 08~40P
- Connector Type: B=Brass
- Contact Plating: SN:Tin; G0:Gold Flash; G2:5u"Gold; G3:10u"Gold; G4:15u"Gold; G5:30u"Gold; S0:Gold Flash/Tin
- Color Type: B=Black; G=Grey
- Stream Code: 01~99

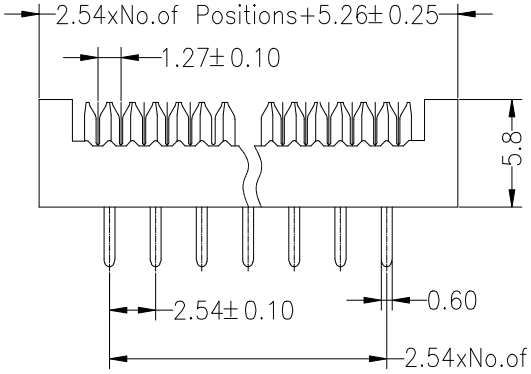



REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.23	NEW DRAWING	

OPERATION		DRAW	YiYuSheng	12.04.23
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JILN® 深圳锦凌电子股份有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD
Tel：86-755-27483253 Fax：86-755-2997-5588

PART NO.	5450−XXBXXXXX
TITLE:	2.54*7.62 DIP Plug