




客户料号:R60103

产品图号:

版次	详细描述	变更日期	变更者
A/0			

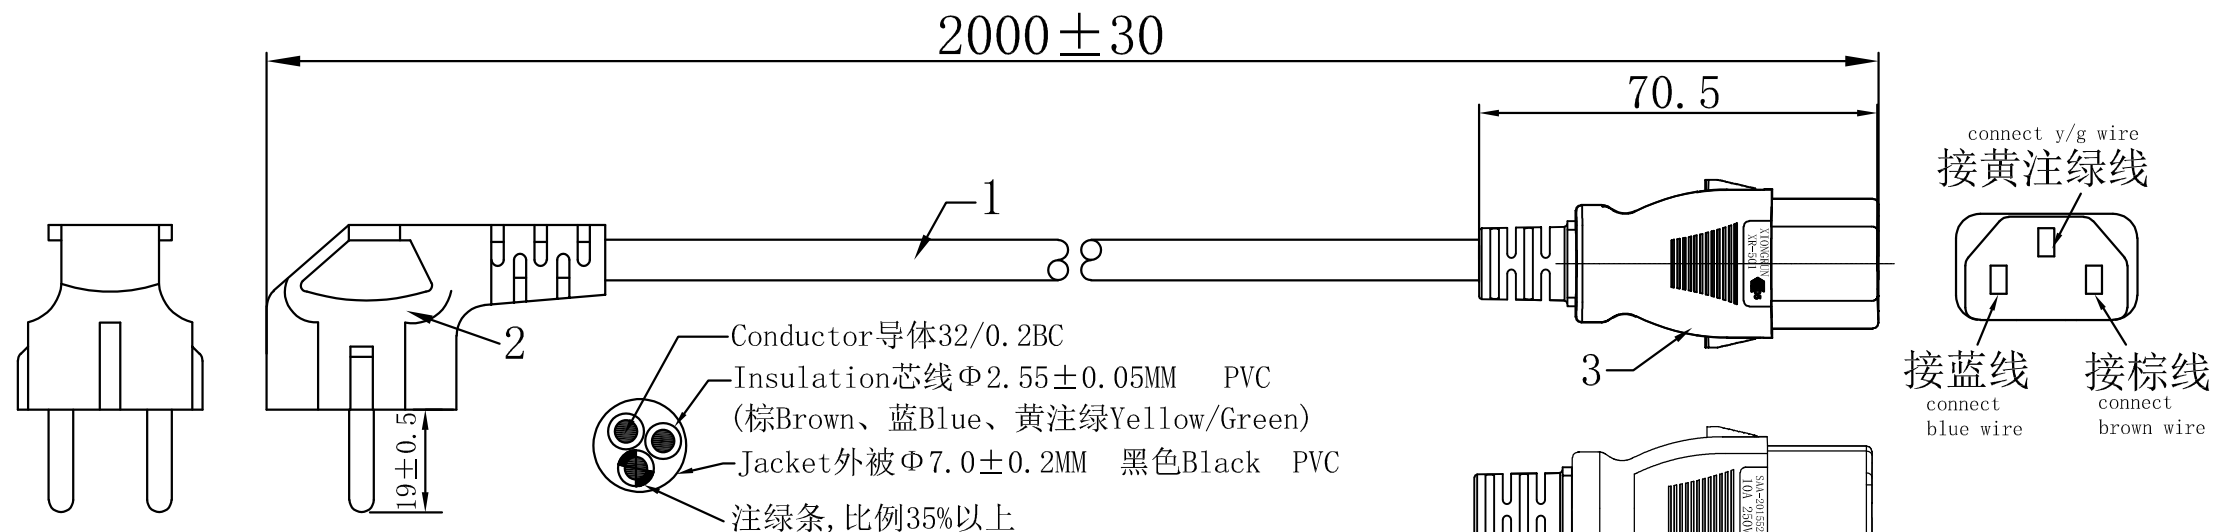

线材印字为凹印, 字轮编号: BY08 ; wire marking:
 ◁ VDE ▷ SAA-182409-EA H05VV-F 3G1.0mm²
 GUANGDONG XIONGRUN ELECTRICAL CO., LTD.

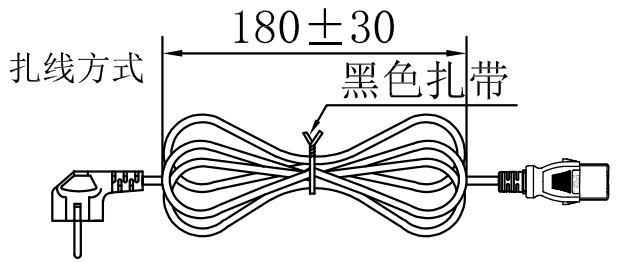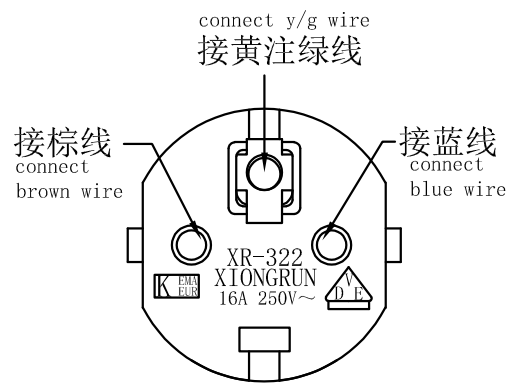

技术要求: requirement:
 1: 耐压测试: 外高压4200V/S; 内高压2500V/S; 0.5MA Dielectric voltage :between jacket and conductors 4200V/S between conductors 2500V/S
 2: 绝缘阻抗不小于100兆欧. Insulation resistance 100MΩ.
 3: 100%导通OK. Continuity of lead 100% OK.
 4: 符合ROHS. RoHS COMPLIANT.



广东雄润电业有限公司
 GUANGDONG XIONGRUN ELECTRICAL CO., LTD

3	带锁品字尾C13(XR-501E) COLOR:黑色black	1	EA	DESCRIPTION		DRAW NO.	XR-0672705	UNIT	M M
2	法式插头(XR-322), 16A 250V~ COLOR:黑色black, PVC	1	EA	PARTS NO		SCALE	NONE	DATE	04/07/2025
1	H05VV-F 3G1.0mm ² , COLOR:黑色black, 裁线长:L=1980mm.	1	EA	APPROVED		CHECKED		DRAWING	BEAR
NO.	DESCRIPTION	QTY	unit						