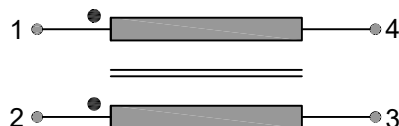


Product Type	SMD Miniature Common Mode Chokes			
GT Part Number	L01-3300 ~ L01-3304	Index		
Customer Part Number	CMJ-2-XXX			
Customer	SCHUKAT			
Place of Manufacture	GT Electronic India			

Page: 01 / 02

SCHEMATIC:**TECHNICAL DETAILS:**

Operating temperature = -25°C to +85°C

Storage Temperature = -40°C to +125°C

ELECTRICAL SPECIFICATION @25°C:


GT Part Number	Customer Part Number	I _N in mA	No Load Inductance / wdg (L ₀ in µH) +50% / -30% @100kHz/20mV	Leakage Inductance (L _L in µH) Typ. @100kHz/100mV	R _{cu} in mΩ / Wdg	Turns Ratio & Polarity	Test Voltage in V _{rms} b/n Windings
L01-3300	CMJ-2-101	500	100	0.25	315	1 : 1	500
L01-3301	CMJ-2-102	500	1000	0.25	275	1 : 1	500
L01-3302	CMJ-2-222	400	2200	0.25	345	1 : 1	500
L01-3303	CMJ-2-470	500	47	0.20	130	1 : 1	500
L01-3304	CMJ-2-472	200	4700	0.30	940	1 : 1	500

Product Type	SMD Miniature Common Mode Chokes		
GT Part Number	L01-3300 ~ L01-3304	Index	
Customer Part Number	CMJ-2-XXX		
Customer	SCHUKAT		
Place of Manufacture	GT Electronic India		




Page: 02 / 02

MECHANICAL SPECIFICATIONS:

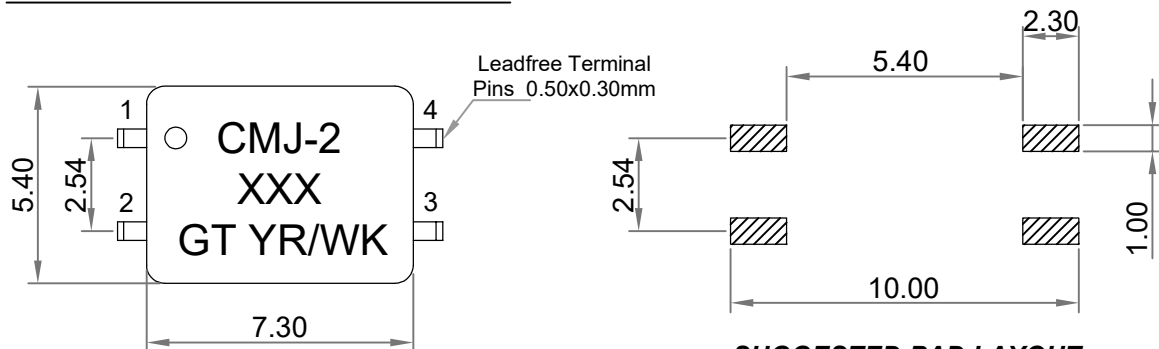


TOP VIEW


SUGGESTED PAD LAYOUT

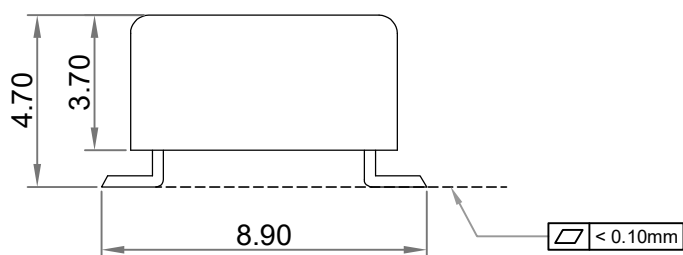

FRONT VIEW



SIDE VIEW



ISOMETRIC VIEW

PRODUCT MARKING INFORMATION:

○ CMJ-2
XXX
GT YR/WK

PACKING LABEL INFORMATION:

CMJ-2-XXX
GT YR/WK
L01-33XX

Unit: mm Dimensional tolerance: $\pm 0.25\text{mm}$ (Unless specified) Pin-Pitch tolerance: $\pm 0.20\text{mm}$

Product Finished with: ☐ Varnished ☐ Vacuum ☐ Baking ☒ Potted ☐ Fully Potted ☐ Vacuum ☐ Baking
☒ Non-Varnished ☐ Non-Vacuum ☐ Air Dry ☐ Un Potted ☒ Partially Potted(30%) ☒ Non-Vacuum ☒ Air Dry

 This product may contain harmful substances, it may require proper disposal subject to statutory & regulatory laws defined by the local governance of its own country/region as applicable at the time of disposal.

Date: Approval of Customer :

-----Issued-----	1	0	Veerappan K	27.08.2026
Changes	Issue	Rev	Initial	Date