With fuse holders

A range of chassis mount IEC 60320 inlet power entry modules which combine single or twin fuse holders and a high level of suppression, within a compact and lightweight enclosure.

Cost effective solution for business, consumer, medical equipment, VDUs, computers, vending machines and many other general purpose applications.

- Snap-in or screw fit
- Current ratings from 1A to 10A
- Integral single or twin fuse holder
- Compact, lightweight design
- Medical versions available



Mechanical Specifications

Manufacture: metal case with built-in power line connector

according to IEC 60320 & EN 60320 and fuse

holder for 1 (F.-P) or 2 (F.-Q) fuses 5 x 20mm (IEC).

Connections: IEC 60320 - Standard plug (INPUT);

faston 2x2.8 x 0.5 mm or 6.3 x 0.8 mm (OUTPUT);

ground terminal connected to case.

Mounting: F.B- screw mounting, F.C- Snap-in mounting.

Electrical Specifications

Rated voltage (V_R): max 250 V, 50/60 Hz

Rated current (I_R): referred to room temperature = 40°C

Leakage current (IL): at 220 V, 50 Hz, max value

Voltage test (2s.): line to ground 3000 Vdc or 1800 Vac


line to line 1700 Vdc

Climatic category: HPF (25/085/21):

Temperature range: -25°C to +85°C

Filter Range

Code	l _R	L	Cx1	Су	lı.
	(A)	(mH)	(μ F)	(pF)	(mA)
FAB.2680.ZA.100	1	2x10	0.068	2x2200	2x0.2
FAB.2680.ZB.100	2	2x4	0.068	2x2200	2x0.2
FAB.2680.ZC.100	4	2x1.5	0.068	2x2200	2x0.2
FAB.2680.ZF.100	6	2x0.8	0.068	2x2200	2x0.2
FAB.2680.ZG.100	10	2x0.13	0.068	2x2200	2x0.2
FAB.2680.ZC.100 FAB.2680.ZF.100	4	2x1.5 2x0.8	0.068	2x2200 2x2200	2x0.2 2x0.2

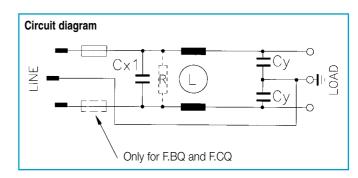

Available Variants

