





Features

- · Plastic housing with class II and PFC design
- Constant Voltage + Constant current mode output
- Standby power consumption < 0.5W
- IP67 rating for indoor or outdoor installations
- Dimming function: 3 in 1 Dimming(C.V Dim. only) to adjust output voltage level
- · Flicker free Design
- Typical lifetime >50000hours
- 5 years warranty

Applications

- · LED panel lighting
- LED downlight
- · LED decorative lighting
- · Industrial lighting
- · Sign board and back light
- LED strip lighting(C.V Dimming)
- Agricultural lighting(C.V Dimming)
- Poultry lighting (C.V Dimming)
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location

Description

NPF-200 series is a 200W AC/DC LED driver featuring the constant current or constant voltage mode output. NPF-200 operates from 100~305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 94% with the fanless design, the entire series is able to operate for -40°C~+85°C case temperature under free air convection. The entire series is rated with IP67 ingress protection level and is suitable to work for a variety of applications at dry, damp or wet locations. NPF-200 is particular design without flicker Dimming Function which is suitable for LED strip or Poultry lighting applications.

■ Model Encoding



Type	IP Level	Function	Note
Blank	IP67	Constant Voltage + Constant current mode output	In Stock
V	IP67	3 in 1 dimming function to adjust output voltage (C.V Dimming)	In Stock



MODEL NPF-200 □-12 NPF-200 □-24 NPF-200□-42 NPF-200 -36 NPF-200 -48 NPF-200 -54 36V 42V DC Voltage 12V 24V 48V 54V CONSTANT CURRENT AND 6 ~ 12V 12~24V 18 ~ 36V 21 ~ 42V 24 ~ 48V 27 ~ 54V **OUTPUT VOLTAGE REGION** 5.55A 4.75A RATED CURRENT 15A 8.3A 4.17A 3.71A RATED POWER 180W 199.2W 199.8W 199.5W 200.1W 200.3W RIPPLE & NOISE (max.) Note.9 150mVp-p 150mVp-p 200mVp-p 250mVp-p 250mVp-p 350mVp-p **OUTPUT** VOLTAGE TOLERANCE Note.10 $\pm 4.0\%$ ±4.0% ±2.0% ±2.0% ±2.0% ±2.0% LINE REGULATION ±0.5% ±0.5% ±0.5% ±0.5% ±0.5% ±0.5% LOAD REGULATION ±2.0% ±0.5% ±0.5% ±0.5% ±0.5% ±0.5% **CURRENT TOLERANCE** +5.0% SET UP TIME Note.3 500ms/230VAC or 115VAC 80ms for Blank type, 200ms for V-type RISE TIME HOLD UP TIME (Typ.) 10ms/230VAC or 115VAC 100 ~ 305VAC 142 ~ 431VDC VOLTAGE RANGE Note 2 (Please refer to "STATIC CHARACTERISTIC" section) **FREQUENCY RANGE** 47 ~ 63Hz $\mathsf{PF}\!\ge\!0.97/115\mathsf{VAC}, \mathsf{PF}\!\ge\!0.96/230\mathsf{VAC}, \mathsf{PF}\!\ge\!0.94/277\mathsf{VAC} \\ @\mathsf{full} \ \mathsf{load}$ POWER FACTOR (Typ.) (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section) THD<20%(@load≥60%/115VC, 230VAC; @load≥75%/277VAC) TOTAL HARMONIC DISTORTION (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section) INPUT EFFICIENCY(Typ.) 94% 94% 93% 94% AC CURRENT (Typ.) 2.2A / 115VAC 1.1A / 230VAC 0.9A / 277VAC INRUSH CURRENT(Typ.) COLD START 65A(twidth=550µs measured at 50% Ipeak) at 230VAC; Per NEMA 410 MAX. NO. of PSUs on 16A 3 units (circuit breaker of type B) / 5 units (circuit breaker of type C) at 230VAC CIRCUIT BREAKER LEAKAGE CURRENT <0.25mA / 277VAC STANDBY POWER CONSUMPTION <0.5W for V-type only (Output voltage dim to off) OVER CURRENT Hiccup mode or Constant current limiting, recovers automatically after fault condition is removed SHORT CIRCUIT Hiccup mode or Constant current limiting, recovers automatically after fault condition is removed PROTECTION 53 ~ 65V 13 ~ 18V 27 ~ 34V 41 ~ 49V 46 ~ 57V 59 ~ 70V **OVER VOLTAGE** Shut down o/p voltage, re-power on to recover Shut down o/p voltage, re-power on to recover **OVER TEMPERATURE** Tcase=-40 ~ +85°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section) WORKING TEMP. MAX. CASE TEMP. Tcase=+85°C 20 ~ 95% RH non-condensing **WORKING HUMIDITY ENVIRONMENT** STORAGE TEMP., HUMIDITY -40 ~ +80°C, 10 ~ 95% RH TEMP. COEFFICIENT $\pm 0.03\%$ /°C (0 ~ 40°C) **VIBRATION** $10 \sim 500$ Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes UL8750(type"HL"), CSA C22.2 No. 250.13-12, According to BS EN/EN61347-2-13 appendix J suitable for emergency installations. ENEC BS EN/EN61347-1, BS EN/EN61347-2-13, BS EN/EN62384 independent, SAFETY STANDARDS EAC TP TC 004, GB19510.1,GB19510.14,IP67 approved; Design refer to BS EN/EN60335-1 SAFETY & WITHSTAND VOLTAGE I/P-O/P:3.75KVAC **FMC** ISOLATION RESISTANCE I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@ load ≥ 60%); BS EN/EN61000-3-3;GB17743 **EMC EMISSION** and GB17625.1, EAC TP TC 020 Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN61547, light industry level(surge immunity Line-Line 2KV); **EMC IMMUNITY** EAC TP TC 020 **MTBF** 829.6K hrs min. Telcordia SR-332 (Bellcore); 247.5K hrs min. MIL-HDBK-217F (25°C) OTHERS DIMENSION 195*68*39.5mm (L*W*H) 1.03Kg; 12pcs/ 13.4Kg/ 0.71CUFT **PACKING**


NOTE

- 1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.
- 2. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.
- 3. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.
- 4. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
- 5. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (to point (or TMP, per DLC), is about 75°C or less.
- 6. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com
- 7. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- 8. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED EN.pdf
- 9.Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
- 10. Tolerance: includes set up tolerance, line regulation and load regulation.
- XX Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx




■ BLOCK DIAGRAM

PFC fosc: 50~120KHz PWM fosc: 60~130KHz

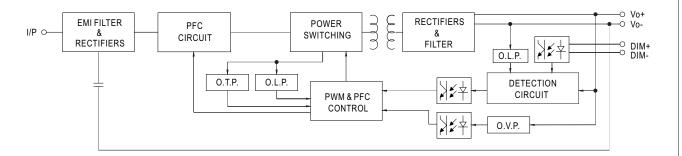

■ DRIVING METHODS OF LED MODULE

* This series works in constant current mode to directly drive the LEDs.




Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




■ DIMMING OPERATION




$\ensuremath{\mathbb{X}}$ 3 in 1 dimming function to adjust output voltage level

- Output constant voltage can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100µA (typ.) ⊚ Applying additive 0 ~ 10VDC




"DO NOT connect "DIM- to Vo-"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):





"DO NOT connect "DIM- to Vo-"


O Applying additive resistance:



"DO NOT connect "DIM- to Vo-"









 $Note: 1.\,Min.\,dimming\,level\,is\,about\,50\%\,of\,output\,voltage\,and\,the\,output\,voltage\,is\,not\,defined\,when\,Vout<50\%\,of\,output\,voltage\,and\,the\,output\,voltage\,is\,not\,defined\,when\,Vout<50\%\,of\,output\,voltage\,and\,the\,output\,voltage\,is\,not\,defined\,when\,Vout<50\%\,of\,output\,voltage\,and\,the\,output\,voltage\,is\,not\,defined\,when\,Vout<50\%\,of\,output\,voltage\,and\,the\,output\,voltage\,is\,not\,defined\,when\,Vout<50\%\,of\,output\,voltage\,and\,the\,output\,voltage\,is\,not\,defined\,when\,Vout<50\%\,of\,output\,voltage\,and\,the\,output\,voltage\,is\,not\,defined\,when\,Vout<50\%\,of\,output\,voltage\,and\,the\,output\,voltage\,is\,not\,defined\,when\,Vout<50\%\,of\,output\,voltage\,and\,the\,output\,voltage\,is\,not\,defined\,when\,Vout<50\%\,of\,output\,voltage\,and\,the\,output\,voltage\,is\,not\,defined\,when\,Vout<50\%\,of\,output\,voltage\,and\,the\,output\,voltage\,is\,not\,defined\,when\,Vout<50\%\,of\,output\,voltage\,and\,the\,output\,volt$

2. The output voltage could drop down to 0V when dimming input is about 0k or 0Vdc, or 10V PWM signal with 0% duty cycle.




■ OUTPUT LOAD vs TEMPERATURE

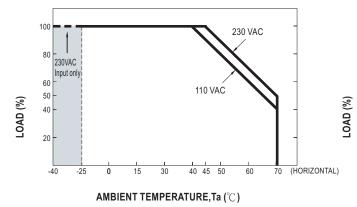




■ STATIC CHARACTERISTIC



※ De-rating is needed under low input voltage.


■ POWER FACTOR (PF) CHARACTERISTIC

★ Tcase at 75°C



■ TOTAL HARMONIC DISTORTION (THD)


imes 48V Blank-Type Model, Tcase at 75 $^{\circ}$ C



■ EFFICIENCY vs LOAD


NPF-200 series possess superior working efficiency that up to 94% can be reached in field applications.

ightarrow 48V Blank-Type Model, Tcase at 75 $^\circ$ C





■ LIFE TIME

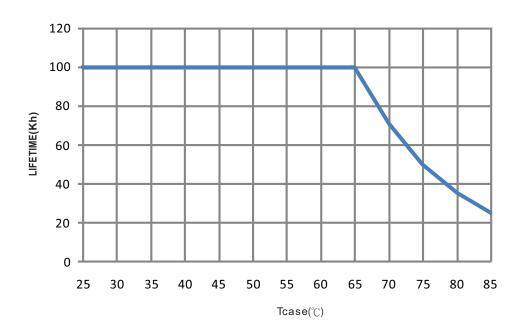

Unit:mm


Case No. PWM-200

■ MECHANICAL SPECIFICATION

※ Blank Type(C.C+C.V mode)

AC/L(Brown)


AC/N(Blue)

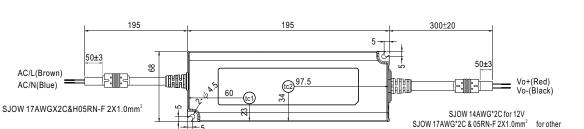

- (c1): Max. Case Temperature for Input 110Vac
- (c2): Max. Case Temperature for Input 230Vac



% V-Type(C.V mode Dimming)

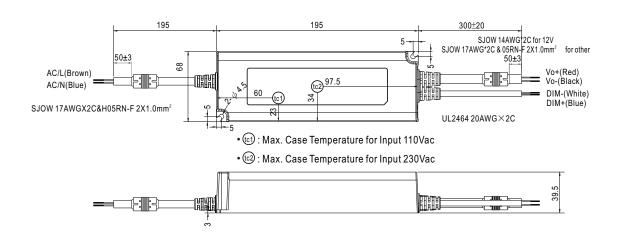

■ Recommend Mounting Direction



■ INSTALLATION MANUAL

Please refer to:http://www.meanwell.com/manual.html