# **Features**

# DIN Rail Mounting Kit

- Accessory fitting to panel-mount modules /PMx
- Mating to TS 35 according to DIN EN 60715
- Kit of the clip includes appropriate screws



## **R-DR/CLIP**

# TS 35 DIN Rail Clip Kit




### Description


The R-DR/Clip is the accessory for the convertibles under RECOM's panel-mount AC/DC modules to clip them onto TS 35 DIN rails. It comes as a kit together with the appropriate screws for fixing onto the panel mount series with the suffix "/PMx".

Compatible Converters					
Product Series	nom. Input Voltage [VAC]	nom. Output Voltage [VDC]	Max. Tightening Torque [Nm]	Product Datasheet Link	
RACM30-K/277/PMP	85-305	5, 12, 24	0.7	RACM30-K/277.pdf	
RACM30-K/277/PMA	85-305	5, 12, 15, 24	0.7	RACM30-K/277.pdf	

DIMENSION AND PHYSICAL CHARACTERISTICS				
Parameter	Туре	Value		
Dimension (LxWxH)		48.0 x 25.0 x 9.0mm		
Materials	clip	aluminum		
Iviaterials	screws	low carbon steel		
Weight	clip	20.8g typ.		

### **Dimension Drawing (mm)**

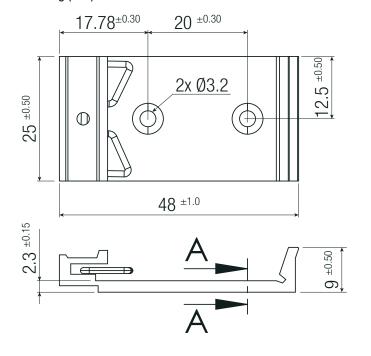





# R-DR/CLIP

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

# RACM30-K/277/PMP module RACM30-K/277/PMP Modul R-DR/CLIP accessory part R-DR/CLIP Zubehörteil 2x M3X0.5 length: 8mm Countersunk head with recessed head Screw driver size: P1 Torque: 0.7Nm max.

PACKAGING INFORMATION					
Parameter	Type	Value			
Packaging Dimension (LxWxH)	cardboard box	112.0 x 70.0 x 72.0mm			
Deckaring Quantity	cardboard box	24pcs R-DR/CLIP (each clip in one airbag)			
Packaging Quantity	Caruboard box	48pcs M3X0.5 countersunk head screws (all screws in one airbag)			

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

www.recom-power.com REV.: 1/2023 P-2