



1-phase filters FN 2070

Multi-stage performance EMI filter



- Rated currents from 1 to 36A
- High differential and common-mode attenuation
- High frequency attenuation
- Optional medical versions (B type)
- Optional safety versions (A type)

Approvals



RoHS
2002/95/EC


Technical specifications

Maximum continuous operating voltage:	250VAC, 50/60Hz
Operating frequency:	dc to 400Hz
Rated currents:	1 to 36A @ 40°C max.
High potential test voltage:	P → E 2000VAC for 2 sec P → E 2500VAC for 2 sec (B types) P → N 1100VDC for 2 sec
Temperature range (operation and storage):	-25°C to +100°C (25/100/21)
Flammability corresponding to:	UL 94V-2 or better
Design corresponding to:	UL 1283, CSA 22.2 No. 8 1986, IEC/EN 60939
MTBF @ 40°C/230V (Mil-HB-217F):	1,550,000 hours 1,600,000 hours (B types)

Features and benefits

- FN 2070 two-stage filters are designed for easy and fast chassis mounting.
- FN 2070 filters are also available as B versions without Y-capacitors for medical applications as well as A version with low capacitance for safety critical applications with necessity for low leakage currents.
- All filters provide a high conducted attenuation performance, based on chokes with high saturation resistance and excellent thermal behavior.
- FN 2070 two-stage filters are designed for high frequency attenuation.
- FN 2070 filters are also available as single-stage filters (FN 2020 series).
- Various terminal options allow you to select the desired connection style.

Typical electrical schematic

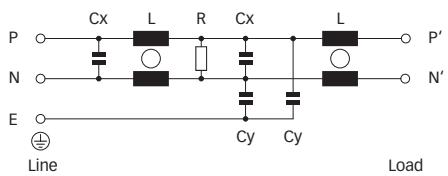

Typical applications

- Electrical and electronical equipment
- Consumer goods
- Household equipment
- Building automation
- Industrial applications
- Machinery
- Medical equipment
- Electronic data processing equipment
- Office automation and datacom equipment
- Various noisy applications requiring good filter performance

Filter selection table

Filter*	Rated current @ 40°C (25°C)	Leakage current** @ 230VAC/50Hz	Inductance L	Capacitance Cx Cy	Resistance R	Input/Output connections		Weight [g]
						[A]	[mA]	
FN 2070-1-..	1 (1.2)	0.734	22	0.33 4.7	1000	-06	-07	190
FN 2070-3-..	3 (3.5)	0.734	9.8	0.47 4.7	470	-06	-07	250
FN 2070-6-..	6 (6.9)	0.734	7.8	1 4.7	220	-06	-07	450
FN 2070-10-..	10 (11.5)	0.734	4.5	1 4.7	220	-06	-07	670
FN 2070-12-..	12 (13.8)	0.734	3.25	1 4.7	220	-06	-07	670
FN 2070-16-..	16 (18.4)	0.734	2.8	1 4.7	220	-06	-07	1000
FN 2070-25-08	25 (28.8)	0.734	2	2.2 4.7	220		-08	760
FN 2070-36-08	36 (41.4)	0.867	1.23	2.2 4.7	220		-08	790
FN 2070A-1-..	1 (1.2)	0.04	22	0.33 0.47	1000	-06	-07	190
FN 2070A-3-..	3 (3.5)	0.04	9.8	0.47 0.47	470	-06	-07	250
FN 2070A-6-..	6 (6.9)	0.04	7.8	1 0.47	220	-06	-07	450
FN 2070A-10-..	10 (11.5)	0.04	4.5	1 0.47	220	-06	-07	670
FN 2070A-12-..	12 (13.8)	0.04	3.25	1 0.47	220	-06	-07	670
FN 2070A-16-..	16 (18.4)	0.04	2.8	1 0.47	220	-06	-07	1000
FN 2070A-25-08	25 (28.8)	0.04	2	2.2 0.47	220		-08	760
FN 2070A-36-08	36 (41.4)	0.07	1.23	2.2 0.47	220		-08	790
FN 2070B-1-..	1 (1.2)	0.002	22	0.33	1000	-06	-07	190
FN 2070B-3-..	3 (3.5)	0.002	9.8	0.47	470	-06	-07	250
FN 2070B-6-..	6 (6.9)	0.002	7.8	1	220	-06	-07	450
FN 2070B-10-..	10 (11.5)	0.002	4.5	1	220	-06	-07	670
FN 2070B-12-..	12 (13.8)	0.002	3.25	1	220	-06	-07	670
FN 2070B-16-..	16 (18.4)	0.002	2.8	1	220	-06	-07	1000
FN 2070B-25-08	25 (28.8)	0.002	2	2.2	220		-08	760
FN 2070B-36-08	36 (41.4)	0.002	1.23	2.2	220		-08	790


* To compile a complete part number, please replace the -.. with the required I/O connection style (e.g. FN 2070-25-08, FN 2070B-10-06).

** Maximum leakage under normal operating conditions. Note: if the neutral line is interrupted, worst case leakage could reach twice this level.


Typical filter attenuation

Per CISPR 17; A = 50Ω/50Ω sym; B = 50Ω/50Ω asym; C = 0.1Ω/100Ω sym; D = 100Ω/0.1Ω sym


1A types




3 to 12A types



16A types





25 and 36A types





Mechanical data



Connection style -06, 1 and 3A types





Connection style -06, 6 to 12A types





Connection style -06, 16A types





Connection style -07, 6 to 12A types (same dimensions as style -06)

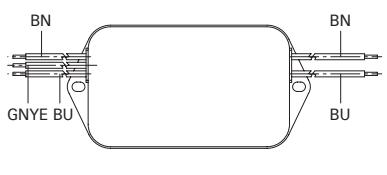



Connection style -07, 16A types (same dimensions as style -06)



Connection style -08, 16A types



Connection style -08, 25 and 36A types



Dimensions

	1A	3A	6A	10A	12A	16A	25A	36A	Tolerances
A	85 ±0.5	85 ±0.5	113.5	156	156	119	156	156	±1
B	54 ±0.5	54 ±0.5	57.5	57.5	57.5	85.5	57.5	57.5	±1
C	30.3 ±0.5	40.3 ±0.5	45.4	45.4	45.4	57.6	45.4	45.4	±1
D	64.8 ±0.5	64.8 ±0.5	94	130.5	130.5	98.5	130.5	130.5	±1
E	49.8	49.8	56	56	56	84.5	56	56	±0.5
F	75	75	103	143	143	109	143	143	±0.3
G	27	27	25	25	25	40	25	25	±0.2
H	12.3	12.3	12.4	12.4	12.4	15.6	12.4	12.4	±0.5
I	20.8	29.8	32.4	32.5	32.5		32.5	32.5	±0.5
J	19.9	11.4	15.5	15.5	15.5	42.25	15.5	15.5	±0.5
K	5.3	5.3	4.4	5.3	5.3	4.4	5.3	5.3	
L	6.3	6.3	6	6	6	7.4	6	6	
M	0.7	0.7	0.9	1	1	1.2	1	1	

Connection style -06

N	6.3 x 0.8					
---	-----------	-----------	-----------	-----------	-----------	-----------

Connection style -07

O	8.3	8.3	8.4	8.4	8.4	8.6	±0.5
P	14.9	14.9	18	18	18	42.25	±0.5

AWG type wire	AWG 20	AWG 20	AWG 18	AWG 18	AWG 16	AWG 16
---------------	--------	--------	--------	--------	--------	--------

Wire length	140	140	140	140	140	140	+5
-------------	-----	-----	-----	-----	-----	-----	----

Connection style -08

N		M4	M4	M4
Q		51		±0.2

All dimensions in mm; 1 inch = 25.4mm

Tolerances according: ISO 2768 / EN 22768