







Features

- · Constant Current mode output
- · Plastic housing with Class II design
- · Built-in active PFC function
- · Class 2 power unit
- IP67 rating for indoor or outdoor installations
- Function: 3 in 1 dimming
- Typical lifetime>50000 hours
- 5 years warranty


Applications

- · LED panel lighting
- · LED downlight
- · LED decorative lighting
- · LED tunnel lighting
- · Moving sign

Description

LPF-25D series is a 25W AC/DC LED driver featuring the constant current output. LPF-25D operates from $90\sim305$ VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the efficiency up to 86%, with the fanless design, the entire series is able to operate for $-35^{\circ}\text{C} \sim +70^{\circ}\text{C}$ case temperature under free air convection. The entire series is rated with IP67 ingress protection level and is suitable to work for a variety of applications at dry, damp or wet locations. LPF-25D is equipped with the 3 in 1 dimming function so as to provide the design flexibility for LED lighting system.

■ Model Encoding

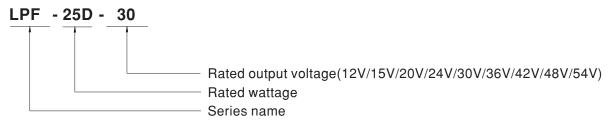

25W Constant Current Mode LED Driver

LPF-25D series


SPECIFICATION

MODEL		LPF-25D-12	LPF-25D-15	LPF-25D-20	LPF-25D-24	LPF-25D-30	LPF-25D-36	LPF-25D-42	LPF-25D-48	LPF-25D-54		
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V		
ОИТРИТ	RATED CURRENT	2.1A	1.67A	1.25A	1.05A	0.84A	0.7A	0.6A	0.53A	0.47A		
	RATED POWER Note.5	25.2W	25.05W	25W	25.2W	25.2W	25.2W	25.2W	25.44W	25.38W		
	CONSTANT CURRENT REGION Note.2	6.6 ~12V	8.25 ~ 15V	11 ~ 20V	13.2 ~ 24V	16.5 ~ 30V	19.8 ~ 36V	23.1 ~ 42V	26.4 ~ 48V	29.7 ~ 54V		
	CURRENT RIPPLE	5.0% max. @rated current										
	CURRENT TOLERANCE	±5.0%										
	SETUP, RISE TIME Note.6	1500ms, 80ms / 115VAC 500ms, 80ms / 230VAC										
	HOLD UP TIME (Typ.)	16ms/230VAC 16ms/115VAC										
INPUT	VOLTAGE RANGE Note.5	90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)										
	FREQUENCY RANGE	47 ~ 63Hz										
	POWER FACTOR	$\label{eq:pf} \begin{tabular}{ll} PF \ge 0.97/115 VAC, PF \ge 0.95/230 VAC, PF \ge 0.92/277 VAC@full load\\ (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section) \end{tabular}$										
	TOTAL HARMONIC DISTORTION	THD<20%(@load≧60%/115VC,230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)										
	EFFICIENCY (Typ.)	84%	84%	85%	85.5%	85.5%	85.5%	85.5%	86%	86%		
	AC CURRENT	0.4A / 115VA	0.25A/	230VAC 0	.2A/277VAC							
	INRUSH CURRENT(Typ.)	COLD START 50A(twidth=200µs measured at 50% Ipeak) at 230VAC; Per NEMA 410										
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	12 units (circuit breaker of type B) / 21 units (circuit breaker of type C) at 230VAC										
	LEAKAGE CURRENT	<0.75mA / 240VAC										
	OVED OURDEN'S	95 ~ 108%										
	OVER CURRENT	Constant current limiting, recovers automatically after fault condition is removed										
	SHORT CIRCUIT	Hiccup mode,	recovers auto	matically after	fault condition	is removed.						
PROTECTION	OVER VOLTAGE	15 ~ 18V Shut down ar	17.5 ~ 21V ad latch off o/p	23 ~ 27V voltage, re-po	28 ~ 35V ower on to reco	34 ~ 40V	41 ~ 49V	46 ~ 54V	54 ~ 63V	59 ~ 66V		
	OVER TEMPERATURE	Shut down o/p	voltage, reco	vers automatic	ally after tempe	erature goes do	own					
ENVIRONMENT	WORKING TEMP.	Tcase=-35 ~ +70°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)										
	MAX. CASE TEMP.	Tcase=+70°C										
	WORKING HUMIDITY	20 ~ 95% RH non-condensing										
		-40 ~ +80°C, 10 ~ 95% RH										
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)										
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes										
	SAFETY STANDARDS Note.8	UL8750, CSA C22.2 No. 250.0-08,ENEC BS EN/EN61347-1, BS EN/EN61347-2-13 independent, BS EN/EN62384, EAC TP TC 004,GB19510.1,GB19510.14,IP67 approved ;Design refer to UL60950-1										
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC										
EMC	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH										
LIVIC	EMC EMISSION Note.8	Compliance to BS EN/EN55015,BS EN/EN61000-3-2 Class C (@load ≥ 55%); BS EN/EN61000-3-3,GB17743 and GB17625.1,EAC TP TC 020										
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN61547, light industry level (surge immunity Line-Line 2KV),EAC TP TC 020										
		1190.8K hrs min. Telcordia SR-332 (Bellcore); 418.5Khrs min. MIL-HDBK-217F (25°C)										
OTHERS	MTBF	1100.0101111311		148*40*32mm (L*W*H)								
OTHERS	DIMENSION					711110111111						
OTHERS	DIMENSION	148*40*32mn		,	0010/, 110.0							
NOTE		148*40*32mn 0.36Kg; 40pc y mentioned a	n (L*W*H) s/ 15.4Kg/1.02 re measured a	CUFT at 230VAC inpu	, :		ambient tempo	erature.				
	DIMENSION PACKING 1. All parameters NOT speciall	148*40*32mn 0.36Kg; 40pc y mentioned a ETHODS OF I	n (L*W*H) s/ 15.4Kg/1.02 re measured a LED MODULE	CUFT at 230VAC inpu	ut, rated currer	nt and 25°C of			or.			
	DIMENSION PACKING 1. All parameters NOT speciall 2. Please refer to "DRIVING M 3. Ripple & noise are measured 4. Tolerance: includes set up to	148*40*32mm 0.36Kg; 40pc y mentioned at ETHODS OF I at 20MHz of b olerance, line re	n (L*W*H) s/ 15.4Kg/1.02 re measured a LED MODULE andwidth by us gulation and lo	CUFT at 230VAC input	ut, rated currer	nt and 25°C of	0.1uf & 47uf p	arallel capacito	or.			
	DIMENSION PACKING 1. All parameters NOT speciall 2. Please refer to "DRIVING M 3. Ripple & noise are measured 4. Tolerance: includes set up to 5. De-rating may be needed ur	148*40*32mm 0.36Kg; 40pc y mentioned at ETHODS OF I at 20MHz of b olerance, line render low input	n (L*W*H) s/ 15.4Kg/1.02 re measured a LED MODULE andwidth by us gulation and lo	CUFT at 230VAC input	ut, rated currer	nt and 25°C of minated with a CTERISTIC" s	0.1uf & 47uf p	arallel capacito	or.			
	DIMENSION PACKING 1. All parameters NOT speciall 2. Please refer to "DRIVING M 3. Ripple & noise are measured 4. Tolerance: includes set up to 5. De-rating may be needed ur 6. Length of set up time is mea	148*40*32mm 0.36Kg; 40pc y mentioned at ETHODS OF I at 20MHz of b olerance, line re- nder low input vasured at first of	n (L*W*H) s/ 15.4Kg/1.02 re measured a LED MODULE andwidth by us gulation and lo voltages. Pleas old start. Turn	CUFT at 230VAC input ".". sing a 12" twist ad regulation. se refer to "ST ing ON/OFF the	ut, rated currer ed pair-wire ter ATIC CHARA ne driver may	nt and 25°C of minated with a CTERISTIC" sead to increas	0.1uf & 47uf p ections for deta e of the set up	arallel capacito ails. o time.		, the		
	DIMENSION PACKING 1. All parameters NOT speciall 2. Please refer to "DRIVING M 3. Ripple & noise are measured 4. Tolerance: includes set up to 5. De-rating may be needed up 6. Length of set up time is mea 7. The driver is considered as complete installation, the fina 8. To fulfill requirements of the	148*40*32mm 0.36Kg; 40pc y mentioned at ETHODS OF I at 20MHz of b alerance, line re- nder low input vasured at first of a component that al equipment materials.	n (L*W*H) s/ 15.4Kg/1.02 re measured a LED MODULE andwidth by us gulation and lo voltages. Plea: old start. Turn nat will be ope nanufacturers i llation for lighti	CUFT at 230VAC input it 230VAC input it ing a 12" twist and regulation. se refer to "ST ing ON/OFF the rated in combit must re-qualify	ut, rated currer ed pair-wire ter ATIC CHARA ne driver may nation with fin EMC Directiv	nt and 25°C of minated with a CTERISTIC" sead to increas al equipment.	0.1uf & 47uf p ections for deta e of the set up Since EMC pe lete installation	arallel capacito ails. o time. rformance will a again.		' the		
	DIMENSION PACKING 1. All parameters NOT speciall 2. Please refer to "DRIVING M 3. Ripple & noise are measured 4. Tolerance: includes set up to 5. De-rating may be needed ur 6. Length of set up time is mea 7. The driver is considered as complete installation, the fina 8. To fulfill requirements of the without permanently connections.	148*40*32mm 0.36Kg; 40pc y mentioned at ETHODS OF I at 20MHz of I blerance, line re ader low input v asured at first of a component the al equipment m latest ErP regulated to the main	n (L*W*H) s/ 15.4Kg/1.02 re measured a LED MODULE andwidth by us gulation and lo voltages. Pleas hold start. Turn hat will be ope hanufacturers i lation for lighti hs.	CUFT tt 230VAC input ".". sing a 12" twist and regulation. se refer to "ST ing ON/OFF the rated in combit must re-qualify ing fixtures, thi	ut, rated currer ed pair-wire ter ATIC CHARA ne driver may ination with fin EMC Directiv s LED driver of	nt and 25°C of minated with a CTERISTIC" sead to increas al equipment. See on the compan only be use	0.1uf & 47uf p ections for detage of the set up Since EMC pe lete installation ed behind a sw	arallel capacito ails. time. rformance will again. vitch	be affected by			
	DIMENSION PACKING 1. All parameters NOT speciall 2. Please refer to "DRIVING M 3. Ripple & noise are measured 4. Tolerance: includes set up to 5. De-rating may be needed ur 6. Length of set up time is mea 7. The driver is considered as complete installation, the fina 8. To fulfill requirements of the without permanently connec 9. This series meets the typica	148*40*32mm 0.36Kg; 40pc y mentioned at ETHODS OF 1 at 20MHz of b blerance, line re nder low input v assured at first of a component the all equipment m latest ErP regulated to the main I life expectance	n (L*W*H) s/ 15.4Kg/1.02 re measured a LED MODULE andwidth by us gulation and lo voltages. Plea- lold start. Turn nat will be ope nanufacturers i lation for lighti is. y of >50,000 f	CUFT It 230VAC input ".". sing a 12" twist and regulation. se refer to "ST ing ON/OFF the rated in combit must re-qualify ing fixtures, thi nours of opera	ut, rated currer ed pair-wire ter ATIC CHARA ne driver may ination with fin EMC Directiv s LED driver of	nt and 25°C of minated with a CTERISTIC" s lead to increas al equipment. Se on the comp an only be use se, particularly	0.1uf & 47uf p ections for detage of the set up Since EMC pe lete installation ed behind a sw	arallel capacito ails. time. rformance will again. vitch	be affected by			
	DIMENSION PACKING 1. All parameters NOT speciall 2. Please refer to "DRIVING M 3. Ripple & noise are measured 4. Tolerance: includes set up to 5. De-rating may be needed ur 6. Length of set up time is mea 7. The driver is considered as complete installation, the fina 8. To fulfill requirements of the without permanently connec 9. This series meets the typica 10. Please refer to the warrant 11. The ambient temperature of	148*40*32mm 0.36Kg; 40pc y mentioned at ETHODS OF I at 20MHz of b derance, line re ader low input v asured at first of a component th al equipment m latest ErP regu ted to the mair I life expectance y statement on lerating of 3.5°	n (L*W*H) s/ 15.4Kg/1.02 re measured a LED MODULE gulation and lo voltages. Pleas hold start. Turn hat will be ope hanufacturers i hation for lighti hs. y of >50,000 i MEAN WELL C/1000m with	CUFT at 230VAC input ".". sing a 12" twist and regulation. se refer to "ST ing ON/OFF the arated in combinants re-qualify ing fixtures, thi mours of opera 's website at I' fanless model	ut, rated currer ed pair-wire ter ATIC CHARA he driver may ination with fin EMC Directivs LED driver cution when Tca http://www.meas and of 5°C/1	nt and 25°C of minated with a CTERISTIC" s ead to increas al equipment. the on the compan only be use se, particularly unwell.com 000m with fan	0.1uf & 47uf p ections for detage of the set up Since EMC pe lete installation ed behind a sw (to point (or T) models for op	arallel capacito ails. time. rformance will again. ritch TMP, per DLC)	be affected by	or less.		
	DIMENSION PACKING 1. All parameters NOT speciall 2. Please refer to "DRIVING M 3. Ripple & noise are measured 4. Tolerance: includes set up to 5. De-rating may be needed ur 6. Length of set up time is mea 7. The driver is considered as complete installation, the fina 8. To fulfill requirements of the without permanently connec 9. This series meets the typica 10. Please refer to the warrant	148*40*32mm 0.36Kg; 40pc y mentioned at ETHODS OF I at 20MHz of b blerance, line re nder low input v asured at first of a component the al equipment m latest ErP regu- ted to the main I life expectance y statement on lerating of 3.5° id IP water pro	n (L*W*H) s/ 15.4Kg/1.02 re measured a LED MODULE andwidth by us gulation and lo voltages. Pleas hold start. Turn hat will be ope hanufacturers is allation for lighti his. y of >50,000 is MEAN WELL C/1000m with of function ins	CUFT at 230VAC input ".". sing a 12" twist and regulation. se refer to "ST ing ON/OFF the arated in combinants re-qualify ing fixtures, thi mours of opera 's website at I' fanless model	ut, rated currer ed pair-wire ter ATIC CHARA he driver may ination with fin EMC Directivs LED driver cution when Tca http://www.meas and of 5°C/1	nt and 25°C of minated with a CTERISTIC" s ead to increas al equipment. the on the compan only be use se, particularly unwell.com 000m with fan	0.1uf & 47uf p ections for detage of the set up Since EMC pe lete installation ed behind a sw (to point (or T) models for op	arallel capacito ails. time. rformance will again. ritch TMP, per DLC)	be affected by	or less.		




■ BLOCK DIAGRAM

fosc: 100KHz

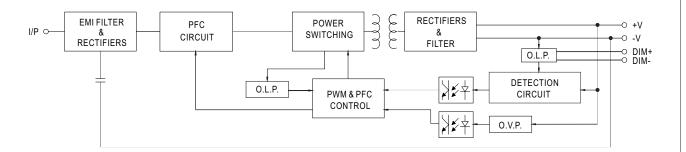

■ DRIVING METHODS OF LED MODULE

* This series works in constant current mode to directly drive the LEDs.

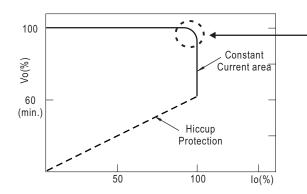

Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




■ DIMMING OPERATION

 \divideontimes 3 in 1 dimming function




- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100µA (typ.)
- O Applying additive 1 ~ 10VDC

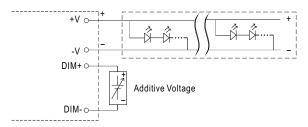


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

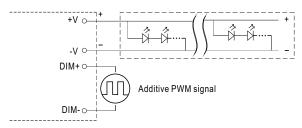



"DO NOT connect "DIM- to -V"


O Applying additive resistance:

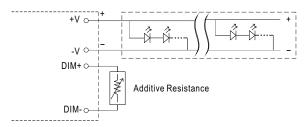

"DO NOT connect "DIM- to -V"











Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

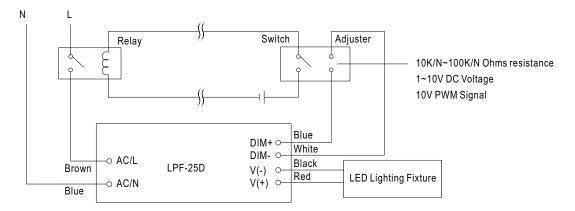


Using a switch and relay can turn ON/OFF the lighting fixture.



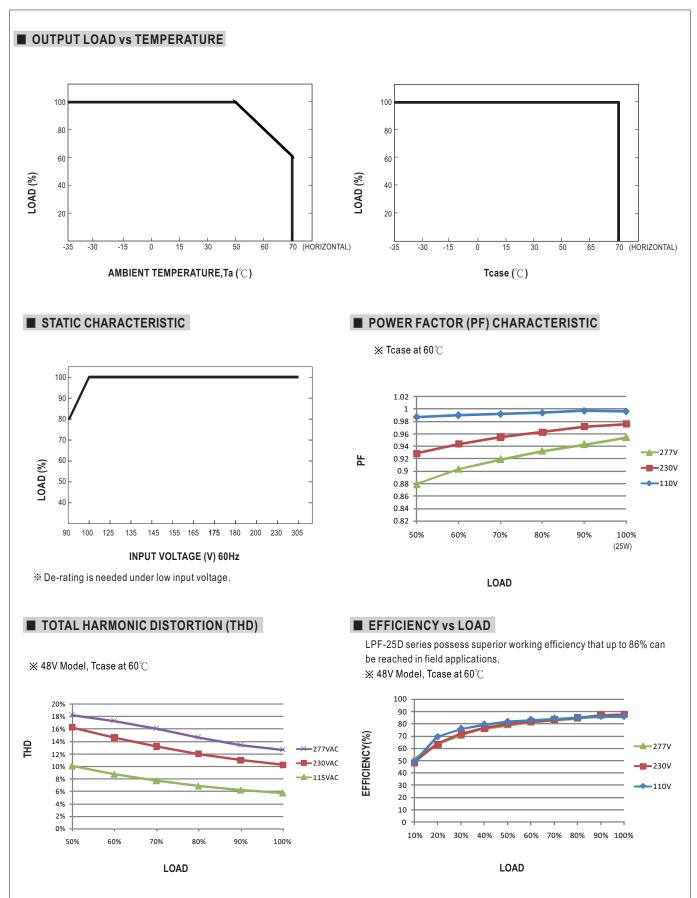




■ LIFE TIME

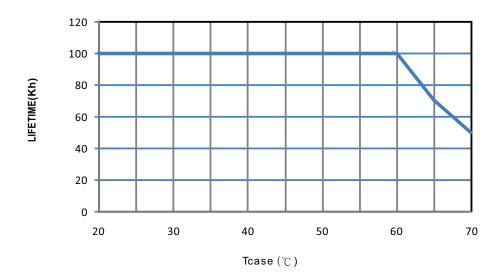



■ MECHANICAL SPECIFICATION

CASE NO.: LPF-16A Unit:mm

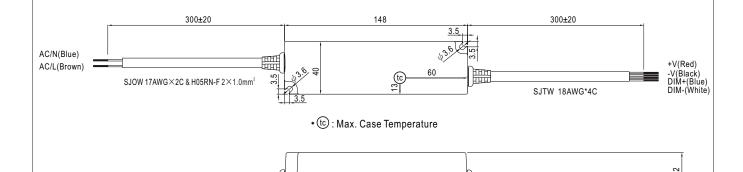

■ Recommend Mounting Direction



■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html