





AC input with fixed cable

AC input with connector

















### Features

- Full power output at 70~100% constant power mode operation
- Wide input range 100 ~ 305VAC with active PFC function
- Metal housing design with IP67 Multiple dimming functions:3 in 1. (0-10V/PWM/Resistor)
- Surge protection with 6kV /4kV
- Dimming circuit with Isolated for latest safety regulation
- Typical lifetime>50000 hours and 5 years warranty
- AC input cable with connector for flexible Installtion


# Applications

- · LED bay lighting
- LED stage lighting
- · LED spot lighting
- Explosion-proof lighting
- Type HL LED driver for class I division 2.

# Description

XBG-240 series is a 240W AC/DC LED driver featuring the constant power mode. XBG-240 operates from 100~305VAC and offers with different rated current ranging between 4000mA and 5700mA. Thanks to the high efficiency up to 93%, with the fanless design, the entire series is able to operate for -40°C ~+90°C case temperature under free air convection. The design of metal housing and IP67 ingress protection level allows this series to fit both indoor and outdoor applications. Moreover the innovative environment-adaptive capability allows this series to reliably light on the LEDs for all kinds of application environments in almost any spots that may install LED luminaires in the world. XBG-240 series comply with the latest version of IEC61347/IEC60598-1 and UL8750 international safety regulations. The output and dimming circuit are also completely in accordance with the new regulations with isolation to ensure the safety of both users and luminaire system during installation.

# Model Encoding

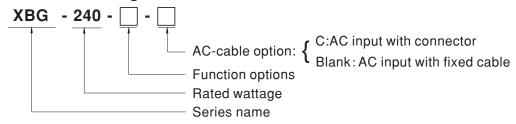

Туре	IP Level	Function	Note
Α	IP67	constant power adjustable via built-in potentiometer	In Stock
AB	IP67	constant power adjustable via built-in potentiometer + 3 in 1 dimming function (0~10Vdc, 10V PWM signal and Resistor	In Stock




MODEL		XBG-240- 🔲 - 🗌				
	DEFAULT CURRENT	4900mA				
	RATED POWER	240W				
	CONSTANT CURRENT REGION	30~60V				
	FULL POWER CURRENT RANGE	4000~5700mA				
OUTPUT	OPEN CIRCUIT VOLTAGE (max.)					
	CURRENT ADJ. RANGE	2000~5700mA				
	CURRENT RIPPLE	4.0% max. @rated current				
	CURRENT TOLERANCE	±5%				
	SET UP TIME Note.4					
INPUT	OLI OI TIME NOC.4	100 ~ 305VAC 142~431VDC				
	VOLTAGE RANGE Note.2	(Please refer to "STATIC CHARACTERISTIC" section)				
	FREQUENCY RANGE	47 ~ 63Hz				
	TREGOLINOT RANGE		E > 0.002 / 277 \ / A C at full load			
	POWER FACTOR (Typ.)	PF≥0.97 / 115VAC, PF≥0.95 / 230VAC, PF≥0.92 / 277VAC at full load (Please refer to "Power Factor Characteristic" section)				
	TOTAL HARMONIC DISTORTION	THD<10% (@ load≥50% at 115VAC/230VAC ,@load≥75% at 277VAC) Please refer to "TOTAL HARMONIC DISTORTION (THD)" section				
	EFFICIENCY (Typ.)	93%				
	AC CURRENT (Typ.)	3.2A / 115VAC 1.3A / 230VAC 1.2	2A / 277VAC			
	INRUSH CURRENT(Typ.)	COLD START 65A(twidth=600/4s measured a				
	MAX. NO. of PSUs on 16A	3 unit(circuit breaker of type B) / 5 units(circuit breaker of type C) at 230VAC				
	CIRCUIT BREAKER	40.75 mA 1.977 MAC				
	LEAKAGE CURRENT	<0.75mA / 277VAC				
	POWER CONSUMPTION	Standby power consumption<0.5W for AB-Type				
	SHORT CIRCUIT	Hiccup mode or constant current limiting, recovers automatically after fault condition is removed				
DDOTECTION	0.450.401.74.05	66 ~ 78V				
PROTECTION	OVER VOLTAGE	Shut down output voltage, re-power on to recover				
	OVER TEMPERATURE	Shut down output voltage, re-power on to recovery				
	WORKING TEMP.	Tcase=-40 ~ +85°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)				
ENVIRONMENT	MAX. CASE TEMP.	Tcase=+85°C				
	WORKING HUMIDITY	20 ~ 95% RH non-condensing				
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH non-condensing				
	TEMP. COEFFICIENT	±0.03%/°C (0~60°C)				
	VIBRATION					
	VIDICATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes				
	SAFETY STANDARDS	UL8750(type"HL"), CSA C22.2 No. 250.13-12; ENEC BS EN/EN61347-1, BS EN/EN61347-2-13 independent, BS EN/EN62384; LS1E986/Dott3/Sca12); CB10510.14; LB57/EAC TR TC 004 approved.				
	WITHETAND VOLTACE	IS15885(Part2/Sec13); GB19510.1,GB19510.14; IP67;EAC TP TC 004 approved				
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC				
SAFETY & EMC	ISOLATION RESISTANCE	I/P-O/P, I/P-PE, O/P-PE:100M Ohms / 500				
		Parameter	Standard	Test Level/Note		
		Conducted	BS EN/EN55015(CISPR15),GB/T17743			
	EMC EMISSION	Radiated	BS EN/EN55015(CISPR15),GB/T17743			
		Harmonic Current	BS EN/EN61000-3-2,GB17625.1	Class C @load≥50%		
		Voltage Flicker	BS EN/EN61000-3-3			
		BS EN/EN61547				
		Parameter	Standard	Test Level/Note		
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV contact		
		Radiated	BS EN/EN61000-4-3	Level 3		
	EMC IMMUNITY	EFT/Burst	BS EN/EN61000-4-4	Level 3		
		Surge	BS EN/EN61000-4-5	4KV/Line-Line 6KV/Line-Earth		
		Conducted	BS EN/EN61000-4-6	Level 3		
		Magnetic Field	BS EN/EN61000-4-8	Level 4		
		Voltage Dips and Interruptions	BS EN/EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods		
		' '		>95% interruptions 250 periods		
	MTBF	615.83K hrs min. Telcordia SR-332/Bello	core): 154.57K hrs min. MIL-HDBK-217	F (25 ())		
	MTBF	,	core); 154.57K hrs min. MIL-HDBK-217	F (25 C)		
OTHERS	LIFETIME Note.5	50000 hrs min.	core); 154.57K hrs min. MIL-HDBK-217	F (25 C)		
OTHERS		,	core); 154.57K hrs min. MIL-HDBK-217	F (25 C)		

- 2. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.
- 3. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
- 4. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time.
- 5. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly to point (or TMP, per DLC), is about 75°C or less.
- 6. To fulfill requirements of the latest ErP regulation for lighting fixture, this LED drive can only be used behind a switch without permanently connected
- 7. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com
- 8. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- 9. Products sourced from the Americas regions may not have the PSE/CCC/BIS/KC logo. Please contact your MEAN WELL sales for more information.
- 10. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED\_EN.pdf
- X Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx




# ■ BLOCK DIAGRAM

PFC fosc: 45~50KHz PWM fosc: 60~130KHz

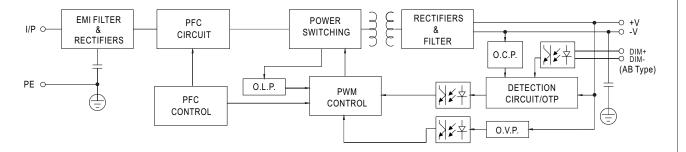

### ■ DRIVING METHODS OF LED MODULE


- ※ I-V Operating Area
  - **XBG-240**

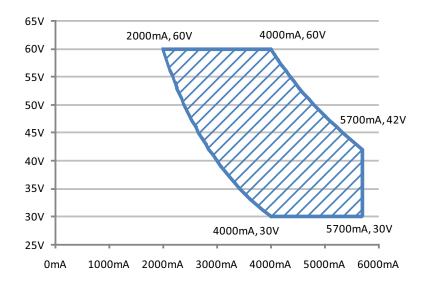

High Performance Region




### **■ DIMMING OPERATION**

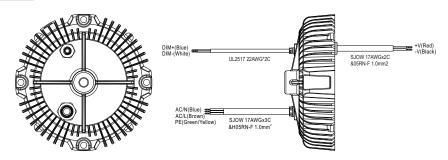


#### **※** 3 in 1 dimming function (for AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
   0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100µA (typ.)
- O Applying additive 0 ~ 10VDC

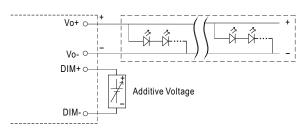


"DO NOT connect "DIM- to Vo-"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

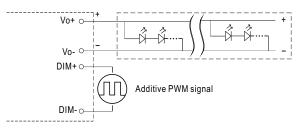



"DO NOT connect "DIM- to Vo-"


Applying additive resistance:

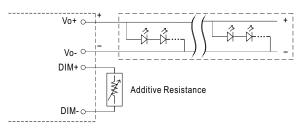

"DO NOT connect "DIM- to Vo-"









Note: 1. Min. dimming level is about 8% and the output current is not defined when 0% < Iout < 8%.

2. The output current could drop down to 0% when dimming input is about  $0\Omega$  or 0Vdc, or 10V PWM signal with 0% duty cycle.



### ■ OUTPUT LOAD vs TEMPERATURE

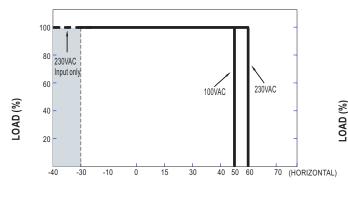

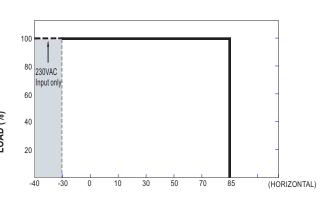


AMBIENT TEMPERATURE, Ta (°C)

Tcase (°C)


NOTE:It may has a soft-start status when operation at -30  $^{\circ}$ C fullload and 100VAC input condition.

### **■ STATIC CHARACTERISTIC**

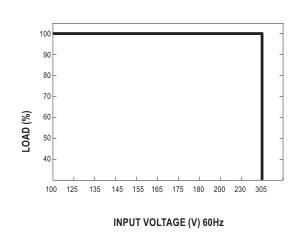


# ■ POWER FACTOR (PF) CHARACTERISTIC

★ Tcase at 65°

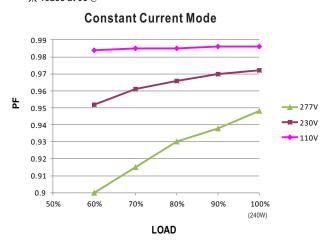


### ■ TOTAL HARMONIC DISTORTION (THD)

#### imes 4000mA Model, Tcase at 65 $^{\circ}$ C

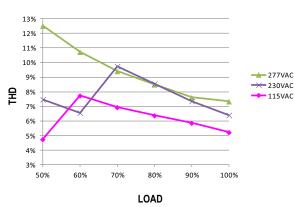


#### **■** EFFICIENCY vs LOAD

 $\rm XBG\text{-}240$  series possess superior working efficiency that up to 93% can be reached in field applications.

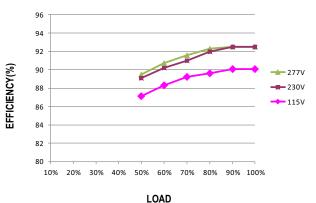



# ■ LIFE TIME

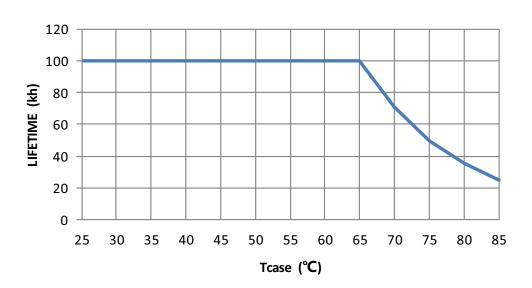

### ■ INSTALLATIONS



#### Caution

- Please inspect the appearance of the driver if the package is damaged. There should not be any cracks.
- · Please do not drop or bump the driver.
- · All screws including the suspension screw should be paired with a spring washer and locked tight.
- The entire luminaire, including the driver, should be limited to 15Kg or less.
- The luminaire should be cautiously protected from damage due to shock throughout packaging and transportation.
- Please thoroughly follow the preceding cautionary notes to prevent the luminaire from falling, leading to injuries.

